




## SPECIFICATIONS

<b>Modèle</b>	B850 GAMING PLUS WIFI PZ
<b>Processeurs supportés</b>	AMD Ryzen™ 9000 / 8000 / 7000
<b>Socket</b>	AMD AM5
<b>Chipset</b>	AMD B850
<b>Slots d'extension</b>	1 x PCIe 5.0 x16, 1 x PCIe 4.0 x4, 2 x PCIe 3.0 x1
<b>Interface vidéo</b>	Support 4K@60Hz tel que spécifié par la norme DisplayPort 1.4 - nécessite un processeur graphique
<b>Mémoire</b>	4 DIMM, Dual Channel DDR5 - 8200+ MT/s (OC)
<b>Stockage</b>	1 x M.2 Gen5 x4 128 Gb/s 1 x M.2 Gen4 x4 64 Gb/s 1 x M.2 Gen4 x2 32 Gb/s 4 x SATA 6 Gb/s
<b>USB</b>	3 x USB 10 Gb/s (1 x Type-A + 2 x Type-C) 6 x USB 5 Gb/s (5 x Type-A + 1 x Type-C) 8 x USB 2.0
<b>LAN</b>	Realtek® 8126 5G LAN
<b>WIFI / BT</b>	Module Wi-Fi 7, Bluetooth 5.4
<b>Audio</b>	HD 8 canaux (7.1) avec Audio Boost

## FEATURES

- 
**5G Network Solution**  
 Featuring premium 5G LAN to deliver better network experience.
- 
**Back-Connect Design**  
 Move the connectors to the back to provide a cleaner and neater front view and significantly reduces the difficulty of cable management.
- 
**Lightning Gen 5**  
 The latest PCIe 5.0 solution with up to 128GB/s bandwidth for maximum transfer speed.
- 
**M.2 Shield FROZR**  
 Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.
- 
**EZ PCIe Clip II**  
 Allows for easy removal of the graphics card by pressing the tail-like lock with one finger, even in the cramped case spaces.
- 
**Extended Heatsink Design**  
 MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.
- 
**Latest DDR5 Memory**  
 A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.
- 
**Wi-Fi 7**  
 The latest wireless solution with a new 320MHz channel, achieving a maximum transmission speed of 5.8Gbps, which is 2.4 times faster than Wi-Fi 6/6E.
- 
**5G Network Solution**  
 Featuring premium 5G LAN to deliver better network experience.
- 
**Pre-installed I/O Shielding**  
 Better EMI protection and more convenience for installation
- 
**Frozr AI Cooling**  
 Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.

## CONNECTIONS

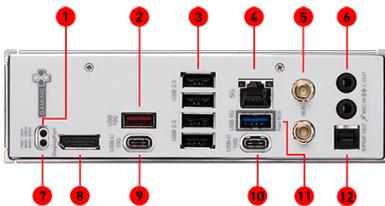

1. Bouton Clear CMOS
2. USB 10 Gb/s (Type-A)
3. USB 2.0
4. 5G LAN
5. Wi-Fi / Bluetooth
6. Jacks audio
7. Bouton Flash BIOS
8. DisplayPort
9. USB 10 Gb/s (Type-C)
10. USB 10 Gb/s (Type-C)
11. USB 5 Gb/s (Type-A)
12. Sortie S/PDIF optique