


Coming Soon

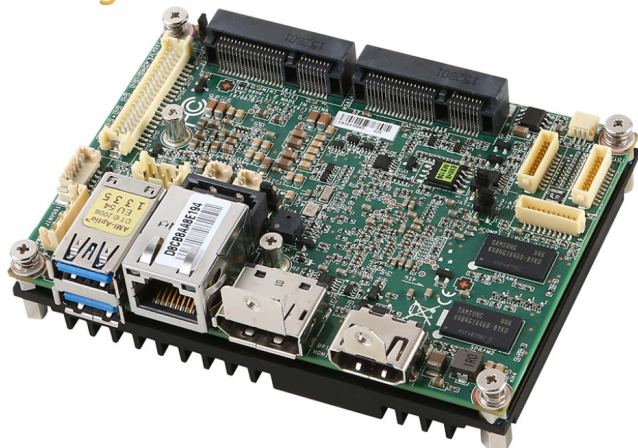

FEATURES

SPECIFICATIONS

CPU	Intel® Pentium® processor N3710, QC, 6W Intel® Celeron® processor N3160, QC, 6W Intel® Celeron® processor N3010, DC, 4W
Frequency	N3710, 1.6 GHz up to 2.56 GHz N3160, 1.6 GHz up to 2.24 GHz N3010, 1.04 GHz up to 2.24 GHz
CPU Type	BGA
Chipset	Integrated in SoC
BIOS	AMI
Technology	Single-channel DDR3L 1600MHz
Max. Capacity	Onboard 2GB
Socket	Onboard
Controller	Intel® HD Graphics
Graphic Memory	Shared system memory up to 1.7 GB SDRAM
LVDS	Dual Channel 18/24-bit
DisplayPort	1
Multiple Display	3 independent displays
Display Interface	LVDS up to 1920 x 1200 @ 60 Hz HDMI™ up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz DP1.1a up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz
Controller	1 x Intel® I211-AT GbE LAN
Controller	Realtek® ALC887-VD2-CG HD Audio Codec
Controller	Fintek F81866AD-I
Smart Fan	Yes
Mini-PCIe	1 x Half-size
SATA	1 x SATA 3.0
mSATA	1
USB	2 x USB 2.0 (2 x internal) 2 x USB 3.0 (2 x rear)
Serial	2 x COM (internal) COM1: RS-232/422/485, 0V/5V/12V COM2: RS-232/422/485, 0V/5V/12V
GPIO	16-bits (8 x GPI; 8 x GPO), 5V
DC Input	DC-in 12V
Operating Temperature	Heat-Spreader: 100(L) x 72.2(W) x 8(H) mm (standard packing) Heat-Sink: -10~60°C , 100(L) x 72.2(W) x 33(H) mm (by option)
Operating Humidity	10 ~ 90%, non-condensing
Storage Temperature	-20 ~ 80°C
Storage Humidity	10 ~ 90%, non-condensing
Dimensions	100mm x 72mm (Pico-ITX)
Weight	0.18 kg
EMC	FCC, CE, RCM, VCCI, BSMI
OS Support	Windows 7 (32/64-bit) Windows 8.1 (64-bit) Windows 10 (64-bit) Fedora 22 Ubuntu 14.04