




SPECIFICATIONS

Model Name	PRO B850M-A WIFI
CPU Support	Supports AMD Ryzen™ 9000 / 8000 / 7000 series Desktop Processors
CPU Socket	AMD Socket AM5
Chipset	AMD B850 Chipset
Expansion slot	1 x PCIe 5.0 x16 slot 1 x PCIe 4.0 x4 slot 1 x PCIe 3.0 x1 slot
Display Interface	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 – Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR5 – 8200+ MT/s (OC)
Storage	1 x M.2 Gen5 x4 128Gbps slot 1 x M.2 Gen4 x4 64Gbps slot 4 x SATA 6Gbps ports
USB ports	6 x USB 10Gbps (3 Type-A + 3 Type-C) 5 x USB 5Gbps (5 Type-A) 4 x USB 2.0
LAN	Realtek® 8126 5G LAN
WIFI / BT	Wi-Fi 7 Solution, Bluetooth 5.4
Audio	8-Channel (7.1) HD Audio with Audio Boost

CONNECTIONS

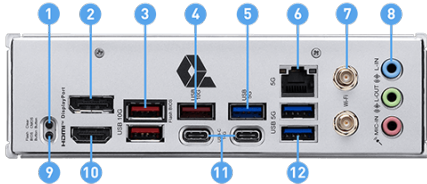

1. Clear CMOS Button
3. USB 10Gbps Type-A
5. USB 5Gbps Type-A
7. Wi-Fi / Bluetooth
9. Flash BIOS Button
11. USB 10Gbps Type-C
2. DisplayPort
4. USB 10Gbps Type-A
6. 5G LAN
8. Audio Connectors
10. HDMI™
12. USB 5Gbps Type-A

FEATURES

- Wi-Fi 7**
Wi-Fi 7 is the latest wireless solution that takes a huge leap forward with multiple improvements to meet the traffic demand brought and the growing number of wireless devices.
- 5G Network Solution**
Featuring premium 5G LAN to deliver better network experience.
- EZ M.2 Shield Frozr II**
The new tool-less design makes installing or removing your M.2 SSD and Shield Frozr much easier
- EZ PCIe Clip II**
Allows for easy removal of the graphics card by pressing the tail-like lock with one finger, even in the cramped case spaces.
- Latest DDR5 Memory**
A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.
- Lightning Gen 5**
The latest PCIe 5.0 solution with up to 128GB/s bandwidth for maximum transfer speed.
- Extended Heatsink Design**
MSI extended PWM heatsink and enhanced circuit design ensures even high-end processors to run in full speed.
- Pre-installed I/O Shielding**
Better EMI protection and more convenience for installation
- Frozr AI Cooling**
Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.