














SPECIFICATIONS

Model Name	MEG Z490 GODLIKE
CPU Support	Supports 10 th Gen Intel® Core™ and Pentium® Gold / Celeron® processors
CPU Socket	LGA 1200
Chipset	Intel® Z490 Chipset
Graphics Interface	3x PCI-E 3.0 x16 slots Support 2-way NVIDIA® SLI™ Technology / 3-way AMD® CrossFire™ Technology
Display Interface	2 x Thunderbolt™ 3 (Type-C) - Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR4-5000MHz(OC)
Expansion Slots	1x PCIe 3.0 x1 slot
Storage	3 x Turbo M.2 32Gb/s slots, supports Intel® Optane™ technology 6x SATA 6Gb/s
USB ports	5 x USB 3.2 Gen 2 10Gbps (2 Type-A + 3 Type-C) + 8 x USB 3.2 Gen 1 5Gbps (Type-A) + 6 x USB 2.0
LAN	Aquantia AQC107 10G LAN + Realtek® 8125B 2.5G LAN
WiFi / BT	Intel® Wi-Fi 6 AX201, Bluetooth 5.1
Audio	8-Channel(7.1) HD Audio with Audio Boost HD
Form Factor	E-ATX

FEATURES

- 
Dual Thunderbolt 3 Ports
 Thunderbolt™ 3 brings Thunderbolt to USB-C at speeds up to 40 Gb/s, creating one compact port that does it all.
- 
Stacked Fin Array
 Precise stacked fin array increases the heat dissipation surface and allows air flow into the heatsink.
- 
WiFi 6
 The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.
- 
Mystic Light
 Personalize your PC with 16.8 million colors / 31 effects, controlled in one click!
- 
Extreme Power Design
 ISL digital PWM, 16+1+1 phases with 90A SPS and dual CPU power connectors to unleash your true power.
- 
Extreme Power Design
 ISL digital PWM, 16+1+1 phases with 90A SPS and dual CPU power connectors to unleash your true power.
- 
Extreme Power Design
 INTERSIL digital PWM, 16+2+1 phases with 90A SPS, Mirrored Power Arrangement and dual CPU power connectors to unleash the maximum performance.
- 
Dynamic Dashboard II
 A colorful OLED panel indicates the status of your GODLIKE and shows off your own personality.
- 
Frozr Heatsink Design
 Designed with double ball bearings to provide best performance for enthusiast gamers and prosumers.
- 
10G Super LAN
 Next level network speed, secure networking with fastest data throughput to improve efficiency.
- 
Smart Button
 Reset Computer, Safe Boot, Turbo Fan and EZ LED control functions with just one click.

CONNECTIONS

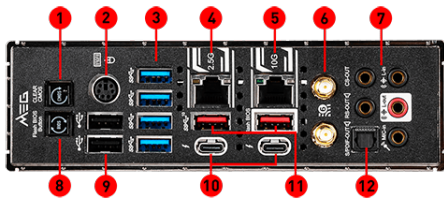

1. Clear CMOS Button
2. PS/2 Keyboard / Mouse Port
3. USB 3.2 Gen1 5Gbps (Type-A)
4. 2.5G LAN
5. 10G Super LAN
6. Wi-Fi /Bluetooth Antenna Connectors
7. HD Audio Connectors
8. Flash BIOS Button
9. USB 2.0
10. Thunderbolt 3 (40Gbps)
11. USB 3.2 Gen2 10Gbps (Type-A)
12. Optical S/PDIF-Out