


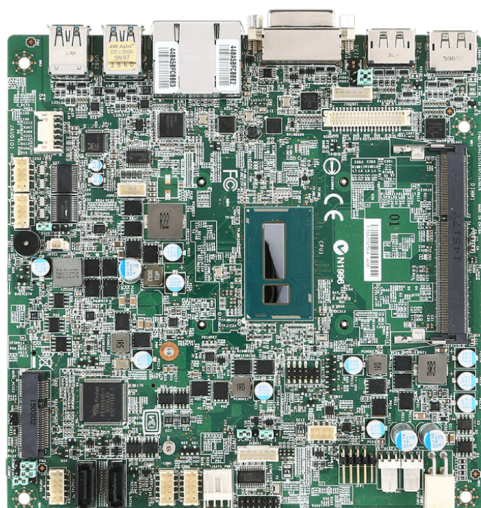

FEATURES

SPECIFICATIONS

Frequency	Depends on CPU
mSATA	1 (shared w/ Mini-PCIe)
Controller	Infineon SLB9635TT 1.2 (by BOM option)
USB	4 x USB 3.0 (rear) 2 x USB 2.0 (internal)
Serial	4 x COM ports (by SKU) COM1: RS-232/422/485, 0V/5V/12V COM2~4: RS-232, 0V/5V/12V
PS/2	1 (pin header)
Mni-PCIe	2 x Full-size (one w/ SIM holder or mSATA)
SATA	2 x SATA 3.0
DC Input	DC-in 12V/19V/24V
Watchdog Timer	256-level Watchdog Timer
Operating Temperature	-10 ~ 60°C
Operating Humidity	10 ~ 90%, non-condensing
Storage Temperature	-20 ~ 80°C
Dimensions	170mm x 170mm (Mini-ITX)
Weight	0.37 kg
EMC	FCC, CE, RCM, VCCI
Smart Fan	Yes
Controller	Fintek F81866AD-I
L2 Cache	Depends on CPU
Controller	Intel® HD Graphics
CPU Type	BGA
Chipset	Integrated
BIOS	AMI
Technology	Dual-channel for DDR3L 1333/1600 MHz
Max. Capacity	Up to 16GB
Socket	2 x 204-pin SO-DIMMs
Graphic Memory	Shared system memory up to 1.7 GB SDRAM
Controller	Realtek® ALC887/888S HD Audio Codec
Multiple Display	3 independent displays
Display Interface	LVDS up to 1920 x 1200 @60Hz HDMI™ up to 4096 x 2304 @30Hz DP up to 3840x 2160 @60Hz DVI-I up to 1920x 1200 @60Hz
LVDS	1 x Dual channel 18/24-bit (Colay with DP)
VGA	1 (shared w/ DVI-D)
DisplayPort	2
Controller	1 x Intel® I218LM GbE LAN PHY 1 x Intel® I210-AT GbE LAN
OS Support	Windows 7 (32/64-bit) Windows 8.1 (32/64-bit) Windows 10 (32/64-bit) Linux Fedora Core 21 Ubuntu 15.04