CARTES MÈRES

MEG Z690I UNIFY

PURE BLACK, PURE PERFORMANCE



SPECIFICATIONS

Model Name	MEG Z690I UNIFY
CPU Support	Supports 12th Gen Intel® Core™ Processors, Pentium® Gold and Celeron® Processors
CPU Socket	LGA 1700
Chipset	Intel® Z690 Chipset
Graphics Interface	1x PCIe 5.0 x16 slot
Display Interface	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4 – Requires Processor Graphics, 2x Thunderbolt™ 4 (Type-C) – Input from mini DisplayPort
Memory Support	2 DIMMs, Dual Channel DDR5-6800+MHz(OC)
Storage	2x M.2 Gen4 x4 64Gbps slots, 1x M.2 Gen3 x4 32Gbps slot, 4x SATA 6Gb/s ports
Thunderbolt™ 4	2x USB Type-C up to 40G, Charging support up to 5V/3A, 15W 2x Mini DisplayPort input ports
USB ports	1x USB 3.2 Gen 2x2 20Gbps (1 Type-C), 2x USB 3.2 Gen 2 10Gbps (2 Type-A), 6x USB 3.2 Gen 1 5Gbps (6 Type-A), 2x USB 2.0
LAN	Intel® I225-V 2.5G LAN
WiFi / BT	Intel® Wi-Fi 6E module, Bluetooth 5.2
Audio	8-Channel (7.1) HD Audio with Audio Boost 5

FEATURES

Dual Thunderbolt™ 4 ports

Thunderbolt™ 4 brings Thunderbolt to USB-C at true 40 Gb/s speeds, 8K display support, Daisy-Chaining and Multi-Port Accessory Architecture.

Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.

Lightning Gen 5

The latest PCIe 5.0 solution with up to 128GB/s bandwidth for maximum transfer speed.

Direct 10+1+1 Phases with 105A SPS

Extreme direct power solution with 10+1+1 phases and 105A Smart Power Stage unleash the maximum CPU performance.

Triple M.2 Connectors

Onboard 3x M.2 connectors with dual PCIe 4.0 solution, strengthened by M.2 Shield Frozr.

Outstanding Cooling Solution

Frozr Heatsink, VRM Heat-pipe, 7W/mK thermal pads, M.2 Shield Frozr and Aluminum Cover & Backplate ensure the extreme performance with low temp.

Front Lightning USB 20G

USB 3.2 Gen 2x2 port offers 20Gbps transmission speed, 4x faster then USB 3.2 Gen 1, available when connecting the front USB Type-C.

2,5G LAN

Le connecteur 2,5G LAN avec LAN Manager délivre une expérience gaming en ligne parfaitement fluide.


Wi-Fi 6E

La nouvelle solution de connexion sans-fil Wi-Fi 6 supporte le spectre 6 GHz, les technologies MU-MIMO et BSS et offre un débit allant jusqu'à 2400 Mb/s.

SMT PCIE and Memory Slot

The advanced SMT(Surface Mount Technology) welding process reduces the defect rate of slot solder joints, deliver the clean and pure signal.

CONNECTIONS

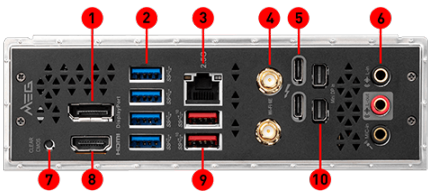

1. DisplayPort
2. USB 3.2 Gen1 5Gbps (Type-A)
3. 2.5G LAN
4. Wi-Fi / Bluetooth
5. Thunderbolt 4 40Gbps (Type-C)
6. HD Audio Connectors
7. Clear CMOS Button
8. HDMI™
9. USB 3.2 Gen2 10Gbps (Type-A)
10. Mini DisplayPort Input (for Thunderbolt passthrough)

Generated 2023-09-20, check for the latest version www.msi.com/datasheet. The information provided in this document is intended for informational purposes only and is subject to change without notice.

© 2023 Micro-Star Int'l Co.Ltd. MSI is a registered trademark of Micro-Star Int'l Co.Ltd. All rights reserved.