




FEATURES



Magnetic Connection

Each two MPG EZ120 ARGB fans can be connected by patented Magnetic Connector Blocks, delivering power and controlling fan speed and LED signals, making installation effortlessly

CONNECTIONS

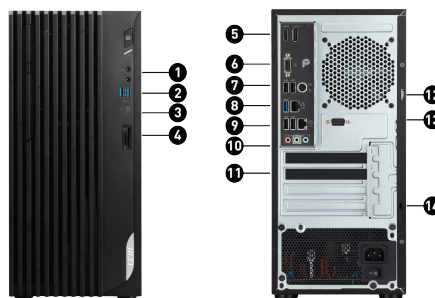

- | | |
|--|---|
| 1. 1x Headphone-out / 1x Mic-in | 2. 2x USB 3.2 Gen 1 Type A |
| 3. 1x USB 3.2 Gen 2 Type C | 4. 1x Card Reader (Support SD & Micro SD Card) |
| 5. 1x HDMI™ out (2.1) / 1x DisplayPort (1.4) | 6. 1x D-Sub (VGA) |
| 7. 2x USB 2.0 Type A / 1x PS/2 | 8. 1x USB 3.2 Gen 1 Type A / 1x RJ45 LAN (2.5G LAN) |
| 9. 2x USB 2.0 Type A / 1x RJ45 LAN (1G LAN) | 10. 3x Audio Jack |
| 11. 1x Padlock | 12. 1x COM Port |
| 13. 1x Kensington Lock | |

SPECIFICATIONS

Selon modèle :

Intel® Core™ i7 14700 (Cache 33M, 2,10 GHz, jusqu'à 5,40 GHz)
Intel® Core™ i7 14700F (Cache 33M, 2,10 GHz, jusqu'à 5,40 GHz)
Intel® Core™ i5 14400 (Cache 20M, 2,50 GHz, jusqu'à 4,70 GHz)
Intel® Core™ i5 14400F (Cache 20M, 2,50 GHz, jusqu'à 4,70 GHz)
Intel® Core™ i3 14100 (Cache 12M, 3,50 GHz, jusqu'à 4,70 GHz)

Processeur

GeForce® RTX™ 4060 Ti VENTUS 2X BLACK 8G OC (3xDP, 1xHDMI™)
GeForce® RTX™ 4060 VENTUS 2X BLACK 8G OC (3xDP, 1xHDMI™)
GeForce® RTX™ 3060 VENTUS 2X 8G (3xDP, 1xHDMI™)
GeForce® RTX™ 3050 VENTUS 2X XS 8G (1xDP, 1xHDMI™, 1xDL-DVI-D)
GeForce® GTX 1650 D6 VENTUS XS V3 (1xDP, 1xHDMI™, 1xDL-DVI-D)
GeForce® GTX 1650 D6 AERO ITX V3 (1xDP, 1xHDMI™, 1xDL-DVI-D)
GeForce® GT 1030 2GD4 LP OC (1xDP, 1xHDMI™)

Carte graphique

Chipset

Intel® 610

Stockage

1 x SSD M.2 (auto switch)
1 x HDD / SSD 2,5"
1 x HDD 3,5"

Mémoire vive

2x DDR4 3200MHz U-DIMMs, up to 64GB

Refroidissement

Ventilateurs

Connectique avant

1x USB 3.2 Gen 2 Type C
2x USB 3.2 Gen 1 Type A
1x Mic-in
1x Headphone-out
1x Card Reader (Support SD & Micro SD Card)

Connectique arrière

1x USB 3.2 Gen 1 Type A
4x USB 2.0 Type A
2x RJ45 LAN (2.5G & 1G)
1x HDMI™ out (supports 4K @60Hz as specified in HDMI™ 2.1)
1x DisplayPort (1.4)
1x D-Sub (VGA)
1x COM port
1x PS/2
3x Audio Jack
1x Kensington Lock
1x Padlock

Système d'exploitation

Windows 11 Famille
- MSI recommande Windows 11 Professionnel pour les entreprises



PRO DP180 14th

BE YOUR WINDOW TO THE WORLD

LAN	Intel® I226V (2.5G LAN) + Intel® I219-V (1G LAN)
Adaptateur / bloc d'alimentation	ATX 500W 80 Plus Bronze Certified PSU
Audio	Realtek® ALC897
Réseau sans fil	Intel® Wi-Fi AC9462 / Wi-Fi 6E AX211
Connectique (avant)	4 x USB 2.0 Type-A 1 x entrée audio 1 x sortie audio
Connectique (arrière)	4 x USB 3.2 Gen1 Type-A 1 x RJ45 1 x sortie HDMI™ (2.0) 2 x COM 1 x entrée audio 1 x sortie ligne
Utilitaires	MSI Cloud Center : Backup files of your mobile devices (Android & iOS), Private Personal Folder, Public Folder, File Synchronization, File Sharing MSI Center : Hardware Monitoring, Free Up Memory, Clean Up Disk, LAN Manager, MSI Recovery, F3 Recovery, Devices Speed Up, Smart Priority, Smart Image Finder, Live Update, Microsoft App Update, System Info, Troubleshooting, Contact Us, MSI Forum & Channel
Dimensions (L x l x H)	168 x 323 x 369 mm (6.61 x 12.72 x 14.53 inch)
Sécurité	Support dTPM 2.0
Poids (Net / Brut)	7.59 kg (16.74 lbs) / 9.03 kg (19.91)
Bluetooth	5.1 (pour AC9462) / 5.3 (pour AX211)
LAN	Realtek® RTL8111H
Adaptateur / Bloc d'alimentation	120 W
Dimensions	204 x 208 x 54,8 mm
Accessoires	1 x câble d'alimentation 1 x guide de démarrage rapide
Certificats	FCC, CB/CE, UL & CUL, VCCI, RCM, ENERGY STAR