

PRO DP80 A14G










SELLING POINTS

- Windows 11 Home MSI recommends Windows 11 Pro for business
- Up to Intel[®] Core[™] i7 Processor 14700
- Available with NVIDIA GeForce RTX™ Graphics card
- Microsoft Copilot enhances your productivity instantly
- Dual channel DDR5 U-DIMMs memory
- Wi-Fi 7 support for efficient AI workload management
- Dual LAN Design (2.5G & 1G LAN)
- Built-in card reader for optimal compatibility and convenience
- Chassis Intrusion detection to help prevent unauthorized access
- Military-grade tested for lasting durability and performance
- Made with PCR-recycled plastics; FSC™certified carton; Waste reduction with recy

FEATURES



GeForce RTX™ Graphics Card





Various IO Design

With a complete array of I/O ports, it can connect all devices that vou need.



Built-in Card Reader

The built-in card reader supports Micro SD & SD Card to bring the best compatibility and convenience



dTPM 2.0 Support

dTPM 2.0 design secures your confidential data with encryption kevs.



Intel® Core™ 14th Gen i7 Processors

Intel® Core™ i7 processor 14700 is equipped with 8 P-cores and 12 E-cores, offering seamless multitasking for gamers and ensuring a smooth gaming experience.





♥ DDR5 Elevate system performance with dual-channel DDR5 technology to enhance efficiency and stability for users.



Dual LAN design provides the second LAN backup and a safer network environment



Easy to upgrade


Easy to access and upgrade components to keep the system up to date with the latest hardware.



PRO DP80 A14G



CONNECTIONS

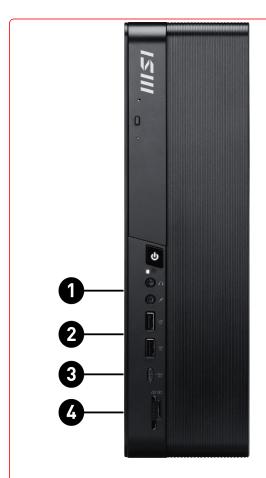

1. 1 x Headphone out ; 1 x Mic in

3. 1x USB 10Gbps Type-C


5. $1x \ \text{HDMI} \ \text{out}$; $1x \ \text{DisplayPort}$ (1.4)

7. 2x USB 2.0 Type-A; 1x PS/2

9. 2x USB 2.0 Type-A ; 1x RJ45 LAN (1G)

11. 1x Graphics Card (*Graphics card varies by model.)


13. 1x Kensington Lock

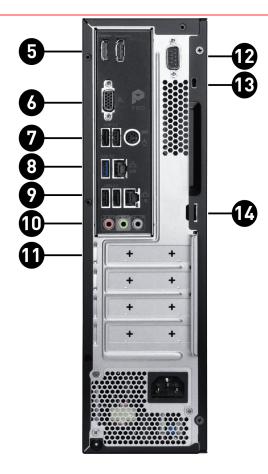

- 2. 2x USB 5Gbps Type-A
- 4. 1x Card Reader (Support SD & Micro SD Card)
- 6. 1x VGA out
- 8. 1x USB 5Gbps Type-A; 1x RJ45 LAN (2.5G)
- 10. 3x Audio Jack
- 12. 1x COM port
- 14. 1x Padlock

SPECIFICATIONS

OS	Windows 11 Home Windows 11 Pro
CPU	Intel® Core™ i7 processor 14700 (33M Cache, 2.10 GHz up to 5.40 GHz) Intel® Core™ i7 processor 14700F (33M Cache, 2.10 GHz up to 5.40 GHz) Intel® Core™ i5 processor 14400 (20M Cache, 2.50 GHz up to 4.70 GHz) Intel® Core™ i5 processor 14400F (20M Cache, 2.50 GHz up to 4.70 GHz) Intel® Core™ i3 processor 14400F (20M Cache, 2.50 GHz up to 4.70 GHz) Intel® Core™ i3 processor 14100 (12M Cache, 3.50 GHz up to 4.70 GHz)
Chipset	Intel® H610
Graphics	MSI GeForce RTX 3050 LP 6G GDDR6 (DP x 1 (v1.4a) / HDMI 2.1 x 2)
Cooler	Air
Memory	DDR5 5600 MHz Max 64GB U-DIMM 2 Slots
Storage	1x M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) 1x 2.5" Drive Bays 1x 3.5" Drive Bays
Audio	Realtek ALC897 7.1 Channel HD Audio





PRO DP80 A14G



1x Mic-in 1x Headphone-out 1x Card Reader 1x USB 3.2 Cen 2 (100) Type C 2x USB 3.2 Cen 1 (160) Type A 3x (Line in / Line out / MIC in) Audio Jack 4x USB 2.0 Type A 1x VGA out 1x (v2.1) HDMI out 1x (v2.1) HDMI out 1x (v2.1) HDMI out 1x (v2.1) HDMI out 1x PS/2 1x CoM Port 1x USB 3.2 Cen 1 (56) Type A 1x VGA out 1x (v2.1) HDMI out 1x PS/2 1x CoM Port 1x USB 3.2 Cen 1 (56) Type A 1x VGA out 1x PS/2 1x CoM Port 1x USB 3.2 Cen 1 (56) Type A 1x VGA out 1x PS/2 1x CoM Port 1x USB 3.2 Cen 1 (56) Type A 1x VGA out 1x VGA	Communication	1x Intel I226-V+1x Intel I219-V Intel Wireless AX211 + Bluetooth v5.3 Intel Wi-Fi 7 BE200 + Bluetooth 5.4 AzureWave AW-CB515NF Wi-Fi 5 + Bluetooth v5
Vo Ports (Rear)	I/O Ports (Front)	1x Headphone-out 1x Card Reader 1x USB 3.2 Gen 2 (10G) Type C
Lock type Padlock Lock Power Supply TFX300W PSU (ATX 12VO) Extensions 3x SATA connectors Product Dimension (WxDxH) 95 x 296 x 330 (mm) Size 8 Liter W/O KB Weight (Net kg) 4.03 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross kg) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Gross kg) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	I/O Ports (Rear)	4x USB 2.0 Type A 1x VGA out 1x (v2.1) HDMI out 1x (v1.4) DP out 1x PS/2 1x COM Port
Power Supply TFX300W PSU (ATX 12VO) Extensions 3x SATA connectors Product Dimension (WxDxH) 95 x 296 x 330 (mm) Size 8 Liter W/O KB Weight (Net kg) 4.03 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross lbs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Gross kg) 10.45 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	Lock type	
Product Dimension (WxDxH) 95 x 296 x 330 (mm) Size 8 Liter W/O KB Weight (Net kg) 4.03 W/O KB Weight (Net lbs) 8.88 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	Power Supply	TFX300W PSU (ATX 12VO)
Size 8 Liter W/O KB Weight (Net kg) 4.03 W/O KB Weight (Net lbs) 8.88 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross lbs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	Extensions	3x SATA connectors
W/O KB Weight (Net kg) 4.03 W/O KB Weight (Net lbs) 8.88 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross lbs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	Product Dimension (WxDxH)	95 x 296 x 330 (mm)
W/O KB Weight (Net Ibs) 8.88 W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross Ibs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Net Ibs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross Ibs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	Size	8 Liter
W/O KB Weight (Gross kg) 6.1 W/O KB Weight (Gross lbs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/O KB Weight (Net kg)	4.03
W/O KB Weight (Gross lbs) 13.45 W/KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/O KB Weight (Net lbs)	8.88
W/KB Weight (Net kg) 4.74 W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/O KB Weight (Gross kg)	6.1
W/KB Weight (Net lbs) 10.45 W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/O KB Weight (Gross lbs)	13.45
W/KB Weight (Gross kg) 6.81 W/KB Weight (Gross lbs) 15.01 Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/KB Weight (Net kg)	4.74
W/KB Weight (Gross lbs)15.01Noise Level28db Idle mode 32db Full loading modeMechanical and Environmental0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/KB Weight (Net lbs)	10.45
Noise Level 28db Idle mode 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/KB Weight (Gross kg)	6.81
Noise Level 32db Full loading mode Mechanical and Environmental 0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%	W/KB Weight (Gross lbs)	15.01
	Noise Level	
Optical Drive Slim Type (9.5mm) Trav-in DVD Super Multi	Mechanical and Environmental	0° C ~ 35° C ; -20° C ~ 60° C 0% ~ 85%;0% ~ 90%
Shirt Type(Sistinity Tray in 515 Super Fluid	Optical Drive	Slim Type(9.5mm) Tray-in DVD Super Multi