


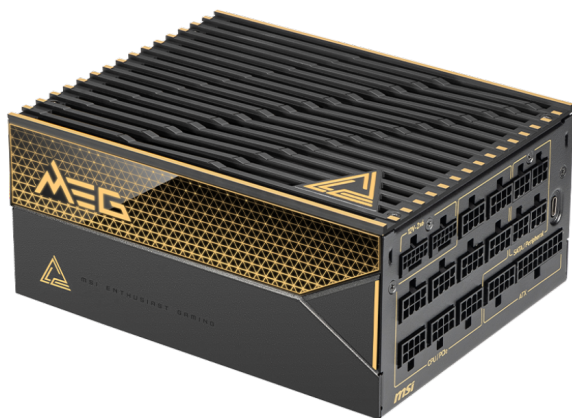

- Supports Nvidia® GeForce RTX™ 50 Series graphics cards
- Dual-native 12V-2x6 Connectors
- Server-grade materials, SiC interleaved PFC MOSFET
- Tri-certified Titanium certification (80 PLUS / Cybenetics / PPLP)
- PCIe 5.1 and ATX 3.1 Ready
- Dual-color 12V-2x6 cables
- 100% all Japanese 105°C capacitor
- Full digital design with control MCU
- Industrial level protection with OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO

SPECIFICATIONS

Model Name	TORX FAN 12CM
WEIGHT (CARD)	169g
Radiator Compatibility	120 / 140 / 240 mm
Dimensions	120mm x 120mm x 25.6mm
Modular	Yes (Fully Modular)
Fan Bearing	Double Ball Bearing
Bearing Type	Hydro-Dynamic Bearing
Rated Speed	500 - 1800 ±15% RPM
Air Flow	19.79 - 71.27 CFM
Static Air Pressure	0.16 - 2.09 mm-H2O
Power Watt	1600W
Connector	4-Pin PWM/DC
Power Excursion	3840W (*up to 240% of the PSU's rated power for 100µs)
Life Expectancy	MTTF 150,000 Hours (25°C)
Input Voltage	100-240
ATX (24 pin)	1
Input Frequency	50~60 Hz
Efficiency	80 PLUS Titanium (up to 94%)
EPS (4+4 pin)	2
PCI-E 5.1 (16 pin)	2 (600W)
Fan Size	135 mm
Dimension	190 x 150 x 86 mm
PCI-E (6+2 pin)	9
PFC Type	Interleaved PFC
SATA (15 pin)	8
Protection	OCP / OTP / OPP / SCP / OVP / UVP / SIP / NLO
PERIPHERAL (4 pin)	8

MEG Ai1600T PCIE5

AC INPUT 100-240V~, 10-15A , 50-60Hz



POWER - SUPPLY

MEG Ai1600T PCIE5

MEG Ai1600T PCIE5					
DC OUTPUT	+5V	+3.3V	+12V	-12V	+5Vsb
	22A	22A	133.3A	0.3A	3A
TOTAL POWER	120W		1599.96W	3.6W	15W
	1600W				

CONNECTOR					
ATX	EPS	PCI-E 5.1	PCI-E	SATA	PERIPHERAL
1	2	2	9	8	8