


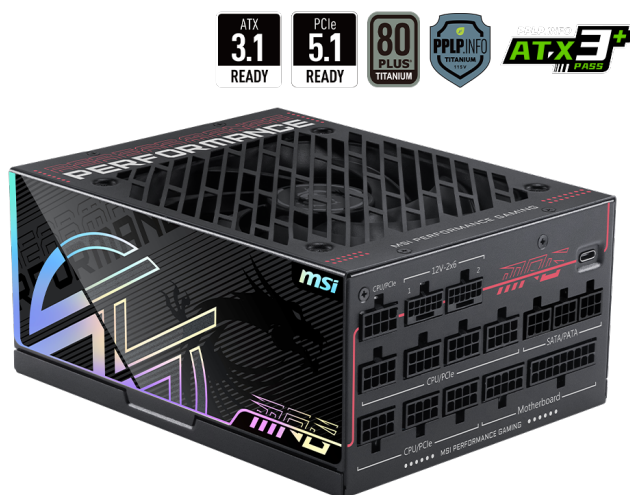

- Premium protection, GPU Safeguard+ and Fan Safeguard
- Server-grade materials, SiC interleaved PFC MOSFET
- Supports Nvidia® GeForce RTX™ 50 series graphics cards
- 2 x native 12V-2x6 connector
- Dual-color 12V-2x6 cable
- 80 PLUS Titanium certified
- Optimized the sound level
- 100% all Server-grade 105°C capacitor
- Embossed Jacket Cables, the cables are more bending and routing
- Industrial level protection with OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO

## SPECIFICATIONS

|                       |                                        |
|-----------------------|----------------------------------------|
| Efficiency Rating     | 80 PLUS Titanium (up to 94%)           |
| Modular               | Yes (full modular)                     |
| Fan Size              | 135 mm                                 |
| Fan Bearing           | Fluid Dynamic Bearing                  |
| Dimensions (DxWxH)    | 190 x 150 x 86 mm                      |
| PFC Type              | Active PFC                             |
| Input Voltage Range   | 100-240V~                              |
| Power Watt            | 1300W                                  |
| Input Frequency Range | 50-60 Hz                               |
| Protection            | OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO |
| ATX (24 pin)          | 1                                      |
| EPS (4+4 pin)         | 1                                      |
| PCI-E 5.1 (16 pin)    | 2 (600W)                               |
| PCI-E (6+2 pin)       | 7                                      |
| SATA (15 pin)         | 8                                      |
| PERIPHERAL (4 pin)    | 4                                      |

### MPG Ai1300TS PCIE5

|             |                           |       |          |       |
|-------------|---------------------------|-------|----------|-------|
| AC INPUT    | 100-240V~,15-10A, 50-60Hz |       |          |       |
| DC OUTPUT   | +5V                       | +3.3V | +12V     | +5Vsb |
|             | 22A                       | 22A   | 108.33A  | 3A    |
| TOTAL POWER | 120W                      |       | 1299.96W | 15W   |
|             | 1300W                     |       |          |       |

### CONNECTOR

| CONNECTOR |     |           |       |      |            |
|-----------|-----|-----------|-------|------|------------|
| ATX       | EPS | PCI-E 5.1 | PCI-E | SATA | PERIPHERAL |
| 1         | 2   | 2         | 7     | 8    | 4          |