


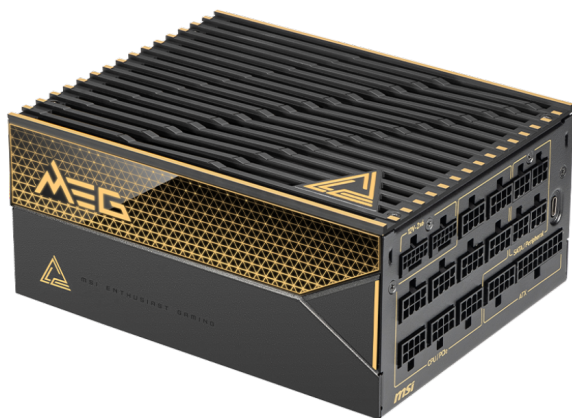

- 支援 Nvidia® GeForce RTX™ 50 系列顯示卡
- 雙原生12V-2x6連接埠
- 伺服器等級用料
- 三項認證鈦金電源供應器 (80 PLUS / Cybenetics / PPLP)
- 符合PCIe 5.1 和 ATX 3.1 標準
- 12V-2x6雙色線材
- 100% 日系105℃ 電容
- MCU全數位控制設計
- 工業保護機制，包含 OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO

SPECIFICATIONS

WEIGHT (CARD)	169g
Efficiency Rating	80 PLUS Titanium (up to 94%)
Modular	Yes (Fully Modular)
Fan Size	135 mm
Fan Bearing	Double Ball Bearing
Dimensions (DxWxH)	190 x 150 x 86 mm
PFC Type	Interleaved PFC
Input Voltage Range	100-240
Power Watt	1600W
Power Excursion	3840W (*up to 240% of the PSU's rated power for 100µs)
Input Frequency Range	50~60 Hz
Protection	OCP / OTP / OPP / SCP / OVP / UVP / SIP / NLO
ATX (24 pin)	1
EPS (4+4 pin)	2
PCI-E (6+2 pin)	9
SATA (15 pin)	8
MOLEX (4 pin)	8
Dimensions	120mm x 120mm x 25.6mm
Connector	4-Pin PWM/DC
PCI-E 5.1 (16 pin)	2 (600W)

MEG Ai1600T PCIE5

AC INPUT		100-240V~, 10-15A , 50-60Hz			
DC OUTPUT	+5V	+3.3V	+12V	-12V	+5Vsb
	22A	22A	133.3A	0.3A	3A
TOTAL POWER	120W		1599.96W	3.6W	15W
	1600W				



POWER-SUPPLY
MEG Ai1600T PCIE5

CONNECTOR					
ATX	EPS	PCI-E 5.1	PCI-E	SATA	PERIPHERAL
1	2	2	9	8	8