
POWER SUPPLY

MPG Ai1300TS PCIE5



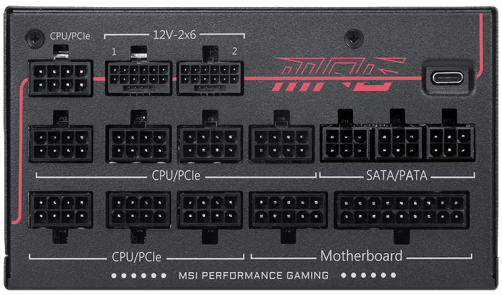

SPECIFICATIONS

Efficiency Rating	80 PLUS TITANIUM
Power Watt	1300W
Modular	Fully Modular
Form Factor	ATX
Dimensions (DxWxH)	150x190x86 mm
PFC Type	Active PFC
Input Voltage Range	100~240 VAC
Input Frequency Range	50~60 Hz
Fan	Size: 135mm Bearing: FDB
Protection	OVP / OCP / OTP / OPP / SCP / UVP / SIP / NLO
Connector	1 x Motherboard (24 pin) 1 x CPU (4+4 pin) 1 x CPU (8 pin) 2 x PCIe 5 (12+4 pin) / 600W 7 x PCIe (6+2 pin) 8 x SATA 4 x Peripheral (4 pin)

FEATURES

GPU SAFEGUARD+

Built-in overcurrent protection specific to the 12V-2x6 interface. The MSI CENTER software issues a real-time warning prompting the user to inspect the connection of the 12V-2x6.

SiC MOSFET

The server-grade materials, not only enhance power supply's stability, also reduce losses, and optimize heat dissipation.

FAN SAFEGUARD

The integrated fan failure protection immediately detects when the fan stops spinning. A buzzer will then sound, alerting you to the problem and preventing the power supply from overheating.

DUAL COLOR 12V-2x6 CONNECTOR

With its vibrant yellow connector, you can easily see if the cable is fully plugged in, which helps guarantee a secure connection.

OPTIMIZED THE SOUND LEVEL

This power supply is designed for quiet operation, delivering low noise levels like in the midnight, ensuring a serene computing experience free from disturbances.

EMBOSSED JACKET CABLE

The embossed cables are exceptionally flexible for easy routing and cable management, while also offering superior durability and a premium look.

Generated 2026-10-29, check for the latest version www.msi.com/datasheet. The information provided in this document is intended for informational purposes only and is subject to change without notice.

© 2026 Micro-Star Int'l Co.Ltd. MSI is a registered trademark of Micro-Star Int'l Co.Ltd. All rights reserved.