


SPECIFICATIONS

Rozmiar wentylatora	135 mm
Modularność	Yes (full modular)
Łożysko wiatraka	Fluid Dynamic Bearing
Moc w watach	1300W
Napięcie wejściowe	100-240V~
Częstotliwość wejściowa	50-60 Hz
EPS (8 pin)	1
Złącza ATX (24 pin)	1
Klasa efektywności	80 PLUS Titanium (up to 94%)
Złącza PCI-E 5.1 (16 pin)	2 (600W)
Złącza EPS (4+4 pin)	1
Złącza PCI-E (6+2 pin)	7
Wymiary (DxWxH)	190 x 150 x 86 mm
Złącza SATA (15 pin)	8
Typ PFC	Active PFC
Złącza MOLEX (4 pin)	4
Zabezpieczenia	OCP/ OTP/ OPP/ SCP/ OVP/ UVP/ SIP/ NLO

FEATURES

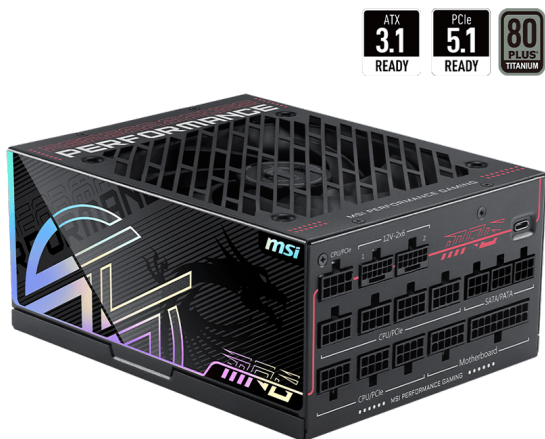

GPU SAFEGUARD+

Built-in overcurrent protection specific to the 12V-2x6 interface. The MSI CENTER software issues a real-time warning prompting the user to inspect the connection of the 12V-2x6.




SiC MOSFET

The server-grade materials, not only enhance power supply's stability, also reduce losses, and optimize heat dissipation.



FAN SAFEGUARD

The integrated fan failure protection immediately detects when the fan stops spinning. A buzzer will then sound, alerting you to the problem and preventing the power supply from overheating.



DUAL COLOR 12V-2x6 CONNECTOR

With its vibrant yellow connector, you can easily see if the cable is fully plugged in, which helps guarantee a secure connection.



OPTIMIZED THE SOUND LEVEL

This power supply is designed for quiet operation, delivering low noise levels like in the midnight, ensuring a serene computing experience free from disturbances.



EMBOSSSED JACKET CABLE

The embossed cables are exceptionally flexible for easy routing and cable management, while also offering superior durability and a premium look.