


SPECIFICATIONS

| | |
|------------------------------------|---|
| Model Name | GeForce RTX™ 4080 SUPER 16G SUPRIM |
| Cores | 10240 Units |
| Memory | 16GB GDDR6X |
| DirectX Version Support | 12 Ultimate |
| Maximum Displays | 4 |
| G-SYNC™ technology | Y |
| Power consumption (W) | 320 W |
| Output | DisplayPort x 3 (v1.4a) HDMI™ x 1 (Supports 4K@120Hz HDR, 8K@60Hz HDR, and Variable Refresh Rate as specified in HDMI™ 2.1a) |
| Digital Maximum Resolution | 7680 x 4320 |
| Versión Soportada de OpenGL | 4.6 |
| Peso | 2372g / 3573g |

CONNECTIONS

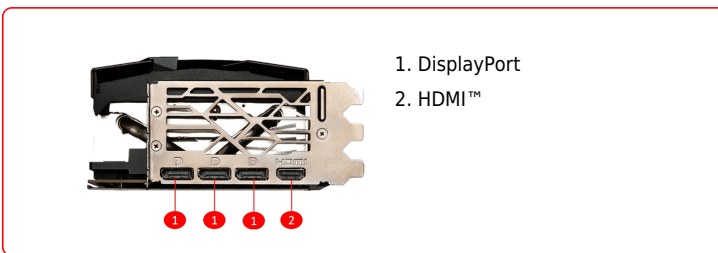

FEATURES



TRI FROZR 3S

Push performance with the latest MSI cooling design and elevate sophistication with a prestigious appearance.



TORX FAN 5.0

Fan blades linked by ring arcs and a fan cowl work together to stabilize and maintain high-pressure airflow.



Vapor Chamber

The GPU and memory modules are covered with a Vapor Chamber which rapidly transfers heat to Core Pipes.



Core Pipe

Precision-machined heat pipes ensure max contact to the GPU and spread heat along the full length of the heatsink.



Wave Curved 3.0

Additional efficiency is gained by adjusting the size of the wave edges under the fan motor and other spots where there is less airflow.



Airflow Control

Sections of different heatsink fins disrupt unwanted airflow harmonics and reduce noise.



Metal Backplate

Thermal pads under the sturdy metal backplate provide additional cooling while the flow-through ventilation reduces trapped heat.



Zero Frozr

The fans completely stop when temperatures are relatively low, eliminating all noise.