




SPECIFICATIONS

Marketing Name	GeForce RTX™ 5060 Ti 16G INSPIRE 2X OC
Memory	16GB GDDR7
Motor de gráficos	NVIDIA® GeForce RTX™ 5060 Ti
Norma Bus	PCI Express® Gen 5 x16 (uses x8)
Interfaz de Memoria	128-bit
Velocidad clock núcleo (MHz)	Extreme Performance: 2632 MHz (MSI Center) Boost: 2617 MHz
Velocidad clock memoria (MHz)	28 Gbps
Máximo de pantallas	4
Tecnología G-SYNC™	Y
Salida	DisplayPort x 3 (v2.1b) HDMI™ x 1 (As specified in HDMI™ 2.1b: up to 4K 480Hz or 8K 120Hz with DSC, Gaming VRR, HDR)
Soporte HDCP	Y
Consumo (W)	180W
Alimentación recomendada (W)	TBD
Resolución máxima digital	7680 x 4320
Conectores de alimentación	8-pin x1
Soporte DirectX Versión	12 Ultimate
Soporte OpenGL Versión	4.6
Dimensiones (mm)	204 x 117 x 50 mm

CONNECTIONS

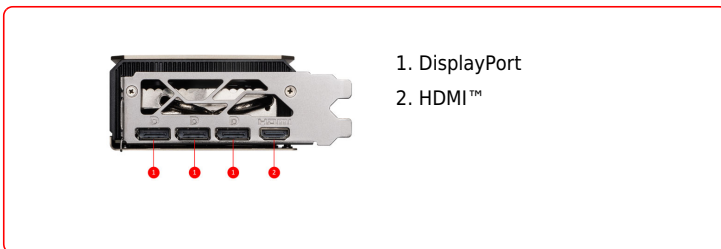

FEATURES

- Dual Fan**
Two fans and a huge heatsink ensure a cool and quiet experience for you.
- STORMFORCE FAN**
Seven fan blades, claw texturing, and a circular arc are designed for optimal airflow with minimal noise.
- Nickel-plated Copper Baseplate**
Heat from the GPU and memory is swiftly captured by a nickel-plated copper baseplate and transferred.
- Core Pipes**
Core Pipes feature a square design to maximize contact with the GPU baseplate for optimal thermal management.
- Metal Backplate**
A sturdy metal backplate strengthens the graphics card while the airflow vent design reduces excess heat.
- Zero Frozr**
The fans completely stop when temperatures are relatively low, eliminating all noise.
- Air Antegrade Fin**
Fins with a V-shaped cutout are located at the airflow passthrough to improve flow efficiency.
- Wave Curved 3.0**
Additional efficiency is gained by adjusting the size of the wave edges under the fan motor and other spots where there is less airflow.
- MSI Center**
The exclusive MSI Center software lets you monitor, tweak and optimize MSI products in real-time.
- Afterburner**
Take full control with the most recognized and widely used graphics card overclocking software in the world.