




SPECIFICATIONS

Marketing Name	GeForce RTX™ 5080 16G SUPRIM LIQUID OC
Memory	16 GB GDDR7
Power connectors	16-pin x 1 (ATX 3.1 PSU recommended)
Grafik Motoru	NVIDIA® GeForce RTX™ 5080
Veriyolu Standardı	PCI Express® Gen 5 x 16
Bellek Arayüzü	256-bit
Çekirdek Hızı(MHz)	Extreme Performance: 2715 MHz (MSI Center) Boost: 2700 MHz
Bellek Hızı(MHz)	30 Gbps
Maximum Displays	4
Output	DisplayPort x 3 (v2.1b) HDMI™ x 1 (As specified in HDMI™ 2.1b: up to 4K 480Hz or 8K 120Hz with DSC, Gaming VRR, HDR)
HDCP Desteği	Y
Power consumption (W)	360 W
Recommended Power Supply (W)	850 W
Digital Maximum Resolution	7680 x 4320
DirectX Desteği	12 Ultimate
OpenGL Desteği	4.6
Boyutlar (mm)	Card: 280 x 148 x 51mm Radiator: 394 x 121 x 55mm Tube length: 450mm
Ağırlık	2812 g / 4129 g

CONNECTIONS

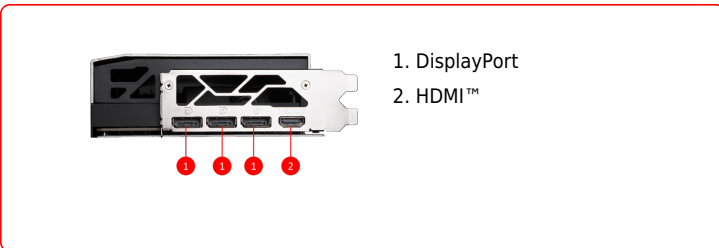

FEATURES



MSI Center

The exclusive MSI Center software lets you monitor, tweak and optimize MSI products in real-time.



Micro-Fin Copper Base

A copper base with fine micro-fins immersed in the liquid stream effectively transfers heat away from the VRAM and GPU.



SUPERIOR HYBRID COOLING

SUPRIM LIQUID's innovative Hybrid design uses both air cooling with STORMFORCE Fan and liquid cooling to effectively manage heat from the GPU and VRAM.



STORMFORCE FAN

Seven fan blades, claw texturing, and a circular arc are designed for optimal airflow with minimal noise.



Metal Backplate

A reinforcing metal backplate with airflow vents and thermal pads enhances cooling.




Advanced Performance Pump

A premium design for optimal flow, delivering automotive-grade coolant to ensure the SUPRIM LIQUID stays cool and performs efficiently.



360 mm Aluminum Radiator

The 360 mm aluminum radiator ensures efficient cooling, while the STORMFORCE fans enhance airflow and simplifies cable management for a tidy installation.



Durable Tubing with Scratch-proof Cover

Braided PVC tubes resist permeation and stay flexible, while the scratch-proof cover enhances durability during SUPRIM LIQUID installation.