


SPECIFICATIONS

Ядра	10240 Units
Пам'ять	16GB GDDR6X
Коннектори живлення	16-pin x 1
Габарити відеокарти (мм)	322 x 136 x 62 mm
Графічний процесор	NVIDIA® GeForce RTX™ 4080 SUPER
Стандарт підключення	PCI Express® Gen 4
Розрядність шини пам'яті	256-bit
Тактова частота ядра	Extreme Performance: 2625 MHz (MSI Center) Boost: 2610 MHz (GAMING & SILENT Mode)
Тактова частота пам'яті	23 Gbps
Максимальна кількість дисплеїв для підключення	4
Енергоспоживання	320 W
Рекомендована потужність блоку живлення	850 W (Min.750 W)
Підтримка HDCP	Y
Конектори	DisplayPort x 2 (v1.4a) HDMI™ x 2 (Supports 4K@120Hz HDR, 8K@60Hz HDR, and Variable Refresh Rate as specified in HDMI™ 2.1a)
Максимальна цифрова роздільна здатність	7680 x 4320
Підтримка версії DirectX	12 Ultimate
Вага	1628g / 2494g (w/ mousepad), 2327(w/o mousepad)

CONNECTIONS

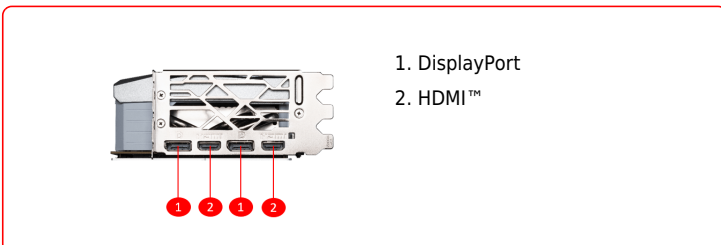

FEATURES



TRI FROZR 3

Stay cool and quiet. MSI's TRI FROZR 3 thermal design enhances heat dissipation all around the graphics card.



TORX FAN 5.0

Fan blades linked by ring arcs and a fan cowl work together to stabilize and maintain high-pressure airflow.



Copper Baseplate

Heat from the GPU and memory modules is captured by a copper baseplate and then rapidly transferred to Core Pipes.



Core Pipe

Precision-machined heat pipes ensure max contact to the GPU and spread heat along the full length of the heatsink.



Airflow Control

Sections of different heatsink fins disrupt unwanted airflow harmonics and reduce noise.



Metal Backplate

A sturdy backplate helps to strengthen the graphics card while a flow-through design reduces trapped heat.



Dual BIOS

Dual BIOS lets you set the priority to full performance in GAMING mode or low noise in SILENT mode.



MSI Center

The exclusive MSI Center software lets you monitor, tweak and optimize MSI products in real-time.