


SPECIFICATIONS

Memory	16GB GDDR6X
Vi xử lý đồ họa	NVIDIA® GeForce RTX™ 4080 SUPER
Chuẩn giao tiếp	PCI Express® Gen 4
Bus bộ nhớ	256-bit
Xung nhịp nhân đồ họa(MHz)	Extreme Performance: 2655 MHz (MSI Center) Boost: 2640 MHz (GAMING & SILENT Mode)
Xung nhịp bộ nhớ (MHz)	23 Gbps
Hỗ trợ màn hình tối đa	4
G-SYNC™ technology	Y
Công suất tiêu thụ (W)	320 W
Hỗ trợ HDCP	Y
Output	DisplayPort x 3 (v1.4a) HDMI™ x 1 (Supports 4K@120Hz HDR, 8K@60Hz HDR, and Variable Refresh Rate as specified in HDMI™ 2.1a)
Digital Maximum Resolution	7680 x 4320
Công suất nguồn đề nghị (W)	850 W (Min.750 W)
Nguồn phụ	16-pin x 1
Hỗ trợ phiên bản DirectX	12 Ultimate
Hỗ trợ phiên bản OpenGL	4.6
Kích thước (mm)	336 x 142 x 78 mm
Cân nặng	2372g / 3573g

CONNECTIONS

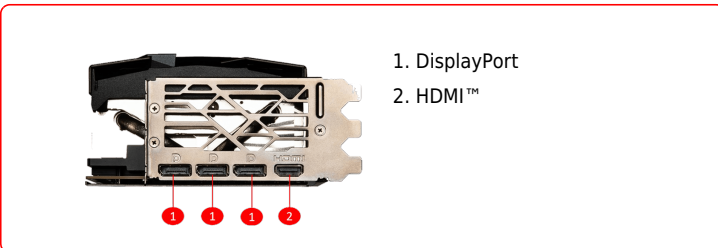

FEATURES



TRI FROZR 3S

Push performance with the latest MSI cooling design and elevate sophistication with a prestigious appearance.



TORX FAN 5.0

Fan blades linked by ring arcs and a fan cowl work together to stabilize and maintain high-pressure airflow.



Vapor Chamber

The GPU and memory modules are covered with a Vapor Chamber which rapidly transfers heat to Core Pipes.



Core Pipe

Precision-machined heat pipes ensure max contact to the GPU and spread heat along the full length of the heatsink.



Wave Curved 3.0

Additional efficiency is gained by adjusting the size of the wave edges under the fan motor and other spots where there is less airflow.



Airflow Control

Sections of different heatsink fins disrupt unwanted airflow harmonics and reduce noise.



Metal Backplate

Thermal pads under the sturdy metal backplate provide additional cooling while the flow-through ventilation reduces trapped heat.



Zero Frozr

The fans completely stop when temperatures are relatively low, eliminating all noise.