


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Panel QD-OLED nové generace - s úžasnou kvalitou obrazu a rychlou odezvou.
- Nejrychlejší doba odezvy 0,03 ms GtG a obnovovací frekvence 360 Hz.
- QD Premium Color - zajišťuje, že barva splňuje tržní standard - Delta E ≤ 2.
- Neuvěřitelný HDR obraz - VESA DisplayHDR True Black 400.
- Aplikace Gaming Intelligence - Vytvořte si dokonalé nastavení zobrazení her.
- MSI OLED Care 2.0 - Snížení rizika vypalování obrazu.
- KVM - ovládání více zařízení prostřednictvím jedné sady klávesnice, myši a monitoru.
- Mystic Light - dokonalý herní povrch.
- Režim konzoly - poskytuje HDMI™ 2.1 s plnou šířkou pásma 48 Gb/s.
- Nastavitelný stojan - Snadná změna polohy monitoru pro maximální ergonomii.

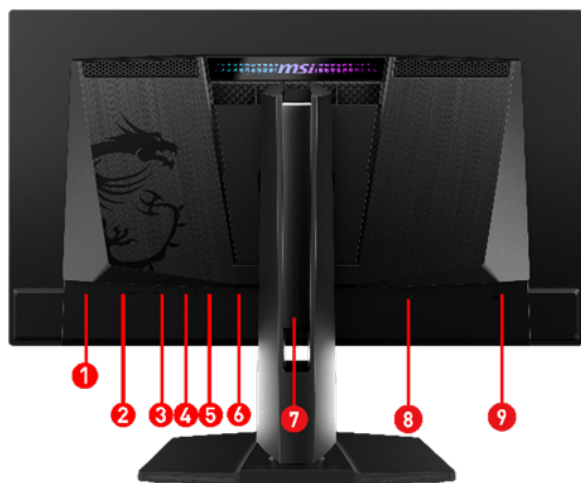

1. Earphone out
2. 2 x HDMI™ (2.1)
3. Display Port (1.4a)
4. USB Type-C (PD 90W)
5. USB 2.0 Type-B
6. 2 x USB 2.0 Type-A
7. 5-way Joystick Navigator
8. AC Power Jack
9. Kensington lock



MONITOR

MPG 271QRX QD-OLED

MPG 271QRXDE QD-OLED

SPECIFICATION

Model	SKU Number	9S6-3CD79A-006
	Entity MKT Name	MPG 271QRXDE QD-OLED
	Part No	9S6-3CD79A-052
	Color	ID1/Black-Black
Display	Screen Size	26.5" (67.31 cm)
	Active Display Area (mm)	590.42(H) x 333.72(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2292(H)x0.2292(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~360Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	96.24~580.32 KHz(H) / 48~360 Hz(V)
	Refresh Rate	360Hz
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	121%/95%
	NTSC (CIE1931 area percentage/overlap)	105%/92%
	sRGB (CIE1976 area percentage/overlap)	138%/100%
	sRGB (CIE1931 area percentage/overlap)	148%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	119%/98%
	Adobe RGB (CIE1931 area percentage/overlap)	109%/95%
	DCI-P3 (CIE1976 area percentage/overlap)	110%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	109%/99%
	Rec.709 (CIE1976 area percentage/overlap)	138%/100%
	Rec.709 (CIE1931 area percentage/overlap)	148%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%/80%
	Rec.2020 (CIE1931 area percentage/overlap)	78%/78%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	33
	Annual Energy Consumption (KWh)	N/A
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
	Power Cord Type	C13



M O N I T O R

MPG 271QRX QD-OLED

M P G 2 7 1 Q R X D E Q D - O L E D

In The Box	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	610 x 242 x 422
	Product Dimension without Stand (WxDxH) (mm)	610 x 69 x 356
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	8.3
	Weight Without Stand (kg)	5.4
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	81 x 18.5 x 50
	Outer Carton Dimension (WxDxH) (cm)	82.8 x 20 x 52.5
	Weight (Gross kg)	10.9
Barcode Info	EAN	4711377378017