


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Panel QD-OLED nové generace - s úžasnou kvalitou obrazu a rychlou odezvou.
- Nejrychlejší doba odezvy 0,03 ms GtG a obnovovací frekvence 240 Hz.
- QD Premium Color - zajišťuje, že barva splňuje tržní standard - Delta E \leq 2.
- Neuvěřitelný obraz HDR - VESA DisplayHDR True Black 400.
- Aplikace Gaming Intelligence - Vytvořte si dokonalé nastavení zobrazení her.
- MSI OLED Care 2.0 - Snížení rizika vypálení obrazu OLED.
- KVM - ovládání více zařízení prostřednictvím jedné sady klávesnice, myši a monitoru.
- Mystic Light - dokonalá herní úprava./li>
- Režim konzoly - poskytuje HDMI™ 2.1 s plnou šířkou pásma 48 Gb/s.
- Nastavitelný stojan - Snadná změna polohy monitoru pro maximální ergonomii.

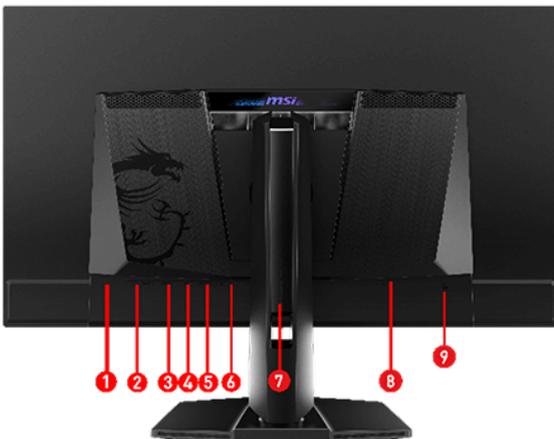

1. Earphone out
2. 2 x HDMI™ (2.1)
3. Display Port (1.4a)
4. USB Type-C (PD 90W)
5. USB 2.0 Type-B
6. 2 x USB 2.0 Type-A
7. 5-way Joystick Navigator
8. AC Power Jack
9. Kensington lock



MONITOR

MPG 321URX QD-OLED

MPG 321URXDE QD-OLED

SPECIFICATION

Model	SKU Number	9S6-3DD29A-006
	Entity MKT Name	MPG 321URXDE QD-OLED
	Part No	9S6-3DD29A-056
	Color	ID1/Black-Black
Display	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	104.88~565.44 KHz(H) / 48~240.39 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120%/93%
	NTSC (CIE1931 area percentage/overlap)	103%/91%
	sRGB (CIE1976 area percentage/overlap)	138%/100%
	sRGB (CIE1931 area percentage/overlap)	146%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	118%/97%
	Adobe RGB (CIE1931 area percentage/overlap)	108%/94%
	DCI-P3 (CIE1976 area percentage/overlap)	110%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	107%/98%
	Rec.709 (CIE1976 area percentage/overlap)	138%/100%
	Rec.709 (CIE1931 area percentage/overlap)	146%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%/80%
	Rec.2020 (CIE1931 area percentage/overlap)	77%/77%
	Surface Treatment	Anti-Reflection
Display Colors	1.07B	
Color bit	10 bits	
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
	Warranty	Warranty
Power	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	44
	Annual Energy Consumption (KWh)	N/A
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
Power Cord Type	C13	

In The Box	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	718 x 242 x 483
	Product Dimension without Stand (WxDxH) (mm)	718 x 69 x 418
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.6
	Weight Without Stand (kg)	6.7
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	97.5 x 18.5 x 51.5
	Outer Carton Dimension (WxDxH) (cm)	99.5 x 19.5 x 54
	Weight (Gross kg)	12.3
Barcode Info	EAN	4711377332491