

### PATH TO THE FUTURE


Introducing the MSI MPG 321URXW QD-OLED esports gaming monitor. This cutting-edge monitor features a 32-inch FHD display with a lightning-fast 240Hz refresh rate and a rapid 0.03ms response time. With the MPG 321URXW QD-OLED, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

### SELLING POINTS

- 3rd Gen QD-OLED Panel - With stunning image quality and fast response time.
- Fastest 0.03ms GtG response time and 240Hz refresh rate.
- QD Premium Color - Ensures the color meets the market standard - Delta E $\leq$ 2.
- Incredible HDR visual - VESA DisplayHDR True Black 400.
- MSI OLED Care 2.0 - Reduced the risk of OLED image sticking / burn-in.
- Console Mode - Provide HDMI™ 2.1(UHD@240Hz) with a full 48 Gbps bandwidth.
- 3-Year Burn-In Warranty - Including coverage for OLED burn in.

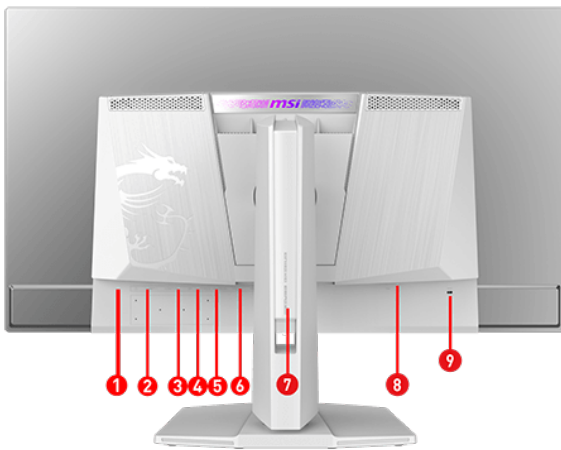

1. Earphone out
2. 2 x HDMI™ (2.1)
3. Display Port (1.4a)
4. USB Type-C (PD 90W)
5. USB 2.0 Type-B
6. 2 x USB 2.0 Type-A
7. 5-way Joystick Navigator
8. AC Power Jack
9. Kensington lock

**SPECIFICATION**

Model	Part No	9S6-3DD29A-050
	Color	ID1/White-White
Display	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	104.88~565.44 KHz(H) / 48~240.39 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120%,93%
	NTSC (CIE1931 area percentage/overlap)	103%,91%
	sRGB (CIE1976 area percentage/overlap)	138%,100%
	sRGB (CIE1931 area percentage/overlap)	146%,100%
	Adobe RGB (CIE1976 area percentage/overlap)	118%,97%
	Adobe RGB (CIE1931 area percentage/overlap)	108%,94%
	DCI-P3 (CIE1976 area percentage/overlap)	110%,99%
	DCI-P3 (CIE1931 area percentage/overlap)	107%,98%
	Rec.709 (CIE1976 area percentage/overlap)	138%,100%
	Rec.709 (CIE1931 area percentage/overlap)	146%,100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%,80%
	Rec.2020 (CIE1931 area percentage/overlap)	77%,77%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
	I/O Ports	USB Type C (DisplayPort Alternate)
Headphone-out		1
USB 2.0 Type A		2
USB 2.0 Type B		1
Lock type		Kensington Lock
HDMI		2
HDMI version		2.1
HDMI HDCP version		2.3
DisplayPort		1
DisplayPort version		1.4a
DisplayPort HDCP version		2.3
Warranty	Warranty	36M
Power	Power Type	Power Cable
	Power Input	110~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	44
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
Power Cord Type	C13	

In The Box	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	718 x 242 x 483
	Product Dimension without Stand (WxDxH) (mm)	718 x 69 x 418
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.6
	Weight Without Stand (kg)	6.7
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	97.5 x 18.5 x 51.5
	Outer Carton Dimension (WxDxH) (cm)	99.5 x 19.5 x 54
	Weight (Gross kg)	12.3
Barcode Info	EAN	4711377332439