

## PATH TO THE FUTURE




Picture and logos

## SELLING POINTS

- Windows 10 Home - MSI empfiehlt Windows 11 Pro für Unternehmen KOSTENLOSES Upgrade auf Windows 11\*
- Intel® Celeron® 5205U / Intel® Pentium® Gold 6405U Prozessor
- Lüfterlos, platz- und energiesparender All-in-One Single-Touch PC
- Anti-Glare LED-Display: Perfekt für den Einsatz im Schaufenster oder als Kasse
- HDD Caddy erweitert die Speicherkapazität
- 2 COM-Anschlüsse für Barcode-Scanner, Kreditkartenlesegeräte, Drucker oder Kassen usw.
- 2 LAN-Anschlüsse
- 4x USB 3.2 Gen 1 und 2x USB 2.0 zum Anschluss zahlreicher Peripheriegeräte
- Befestigung an der Wand möglich (VESA Wall Mount optional)

\*Der genaue Zeitpunkt des Upgrades hängt vom jeweiligen Gerät ab. Die Verfügbarkeit von Apps und Features kann je nach Region abweichen. Bestimmte Funktionen erfordern spezielle Hardware (siehe <https://www.microsoft.com/de-de/windows/windows-11-specifications>).

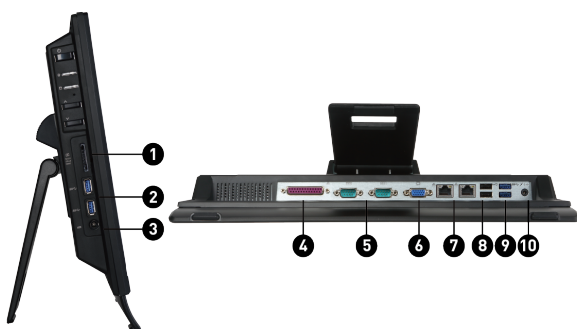

1. 1x Kartenleser
2. 2x USB 3.2 Gen 1 Typ-A
3. 1x DC-in
4. 1x Parallel (Drucker Port)
5. 2x COM Port
6. 1x VGA
7. 2x RJ45
8. 2x USB 2.0 Typ-A
9. 2x USB 3.2 Gen 1 Typ-A
10. 1x Mikrofon-/Kopfhörer Kombo

## SPECIFICATION

|                            |                                |                      |
|----------------------------|--------------------------------|----------------------|
| Betriebssystem             | Betriebssystem                 | N/A                  |
| Prozessor                  | CPU Number                     | Intel Celeron 5205U  |
|                            | CPU Clock                      | 1.9GHz               |
|                            | CPU Cores                      | 2                    |
|                            | Cache                          | 2MB                  |
|                            | Threads                        | 2                    |
|                            | Max Turbo Frequency            | -                    |
| Chipsatz                   | Chipsets                       | N/A                  |
| Grafik                     | GPU1 Vendor                    | N/A                  |
| Arbeitsspeicher            | Memory Size                    | 4GB(4GB*1)           |
|                            | Memory Type                    | DDR4 SDRAM           |
|                            | Module Type                    | SO-DIMM              |
|                            | Memory Slot (Total/Free)       | 2/1                  |
|                            | Max Capacity                   | Max 32GB             |
| Speicher                   | SSD Interface                  | PCIe GEN3x4 NVMe     |
|                            | SSD Form Factor                | M.2-2280 M-KEY       |
|                            | SSD Config                     | 256GB*1              |
|                            | SSD Size                       | 256GB                |
|                            | HDD1 Interface                 | N/A                  |
|                            | HDD1 Form Factor               | N/A                  |
|                            | HDD1 Size                      | N/A                  |
|                            | HDD1 RPM                       | N/A                  |
|                            | ODD(Type)                      | N/A                  |
|                            | ODD Height                     | N/A                  |
|                            | ODD Type                       | N/A                  |
|                            | M.2 slots (Total/Free)         | 1/0                  |
|                            | 2.5" Drive Bays (Total/Free)   | 1/1                  |
|                            | 3.5" Drive Bays (Total/Free)   | 0/                   |
|                            | mSATA slots(Free)              | 0                    |
| Audio                      | Audio Chipset                  | Realtek ALC233       |
|                            | Audio Type                     | 7.1 Channel HD Audio |
| Kommunikation              | LAN                            | Realtek RTL8111H     |
|                            | WLAN Version                   | 802.11ac 1x1+BT      |
|                            | BT Version                     | 5                    |
|                            | WLAN                           | INTEL/9462.NGWWG.NV  |
| Schnittstellen (Vorne)     | USB 3.2 Gen 1 Type A           | 2                    |
| Schnittstellen (Rückseite) | USB 3.2 Gen 1 Type A (R)       | 2                    |
|                            | USB 2.0 Type A (R)             | 2                    |
|                            | RJ45                           | 2                    |
|                            | Card Reader                    | 1                    |
|                            | VGA out                        | 1                    |
|                            | COM Port                       | 2                    |
|                            | Mic-in/Headphone-out combo (R) | 1                    |
|                            | Printer Port (Parallel)        | 1                    |
| Power                      | AC Adapter Output              | 65W                  |
|                            | Battery                        | N/A                  |
|                            | Battery Whrs                   | N/A                  |
| Design                     | Adjustment (Tilt)              | N/A                  |
|                            | Adjustment (Swivel)            | N/A                  |
|                            | Adjustment (Height)            | N/A                  |
|                            | Adjustment (Pivot)             | N/A                  |

|                            |                                                    |                                                                 |
|----------------------------|----------------------------------------------------|-----------------------------------------------------------------|
| Abmessungen & Gewicht      | Weight (Net kg)                                    | N/A                                                             |
|                            | Weight (Gross kg)                                  | N/A                                                             |
|                            | Product Dimension with Holder (WxDxH) (mm)         | 399.5 x 69.2 x 313.9                                            |
|                            | Product Dimension with Holder (WxDxH) (inch)       | 15.73 x 2.72 x 12.36                                            |
|                            | Inside Carton Dimension with Holder (WxDxH) (mm)   | N/A                                                             |
|                            | Inside Carton Dimension with Holder (WxDxH) (inch) | N/A                                                             |
|                            | Inside Carton Dimension with Stand (WxDxH) (mm)    | N/A                                                             |
|                            | Inside Carton Dimension with Stand (WxDxH) (inch)  | N/A                                                             |
|                            | Outer Carton Dimension with Holder (WxDxH) (mm)    | 528 x 183 x 393                                                 |
| Produktmaße mit Standfuß   | Product Dimension with Stand (WxDxH) (mm)          | N/A                                                             |
|                            | Product Dimension with Stand (WxDxH) (inch)        | N/A                                                             |
| Input Device               | WebCam                                             | 1M                                                              |
| Lagerung & Zertifikationen | Operating, Storage Temperature                     | 0° C ~ 35° C ; -20° C ~ 60° C                                   |
|                            | Operating, Storage Humidity                        | 0% ~ 85%;0% ~ 90%                                               |
|                            | Regulatory Compliance                              | FCC(Class B)<br>CB/CE<br>UL(CUL)<br>BSMI<br>VCCI<br>RCM(C-Tick) |
| Garantie                   | Warranty                                           | 24M                                                             |
| Zubehör                    | Power Cord                                         | 1                                                               |
|                            | AC Adaptor                                         | 1                                                               |
|                            | Warranty Card                                      | 1                                                               |
|                            | Quick Guide                                        | 3                                                               |
|                            | User Manual                                        | N/A                                                             |
|                            | VESA Mount kit                                     | N/A                                                             |
|                            | Keyboard                                           | SK9626MW                                                        |
|                            | Mouse                                              | SM9023MW                                                        |
| Barcode Info               | EAN                                                | 4719072701659                                                   |
| Display                    | Screen Size                                        | 15.6" (40 cm)                                                   |
|                            | Active Display Area (mm)                           | 344.132(H)x193.436(V)                                           |
|                            | Curvature                                          | Flat                                                            |
|                            | Panel Type                                         | TN                                                              |
|                            | Resolution                                         | 1366x768 (HD)                                                   |
|                            | Brightness (nits)                                  | 220                                                             |
|                            | Response Time (GTG)                                | 10 ms                                                           |
|                            | View Angles                                        | 45°(H)/45°(V)                                                   |
|                            | Touch Screen                                       | Single Point Resistive Touch Screen                             |
|                            | Display Colors                                     | 262K                                                            |
| Model                      | Part No                                            | 9S6-A61812-019                                                  |
|                            | MKT Name                                           | PRO 16T 10M                                                     |
|                            | MKT Spec                                           | PRO 16T 10M-002XEU                                              |
|                            | Color                                              | ID1/White-White-White                                           |
|                            | Model                                              | A618                                                            |