

PATH TO THE FUTURE


Der 24" Gaming-Monitor MAG 244CDE von MSI bietet unübertroffene Klarheit. VA-Panel, FHD und 180 Hz sorgen für flüssige Grafiken und schnelle Reaktionszeiten. Gebaut für ernsthafte Gamer



Picture and logos

SELLING POINTS

- VA-Panel - Bietet eine MPRT-Reaktionszeit von 1ms und optimierte Farben und Helligkeit des Bildschirms.
- 180Hz Bildwiederholfrequenz - Reagiere schneller dank flüssigen Bildern.
- 1ms (MPRT)Reaktionszeit - Eliminiere Screentearing und abgehackte Bildraten.
- AI Vision - Die neue AI Vision-Technologie kann nicht nur Details in dunklen Bereichen erkennen, sondern auch die Gesamthelligkeit verbessern und Farben sättigen.
- Less Blue Light - Eine Softwarelösung zur Reduzierung der Lichtemission im blau-violetten Bereich des Blaulichtspektrums.

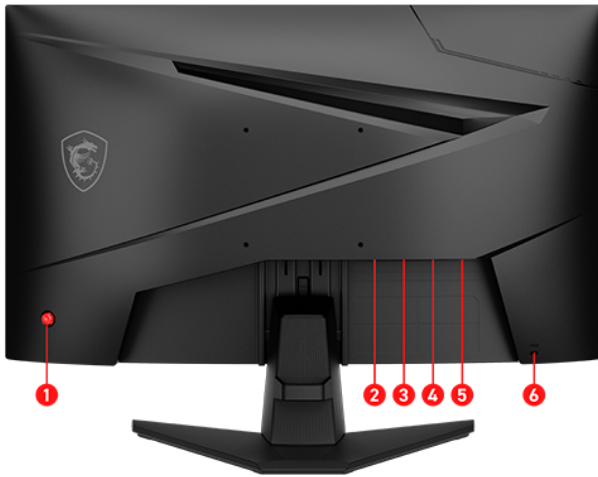

1. OSD Knopf / 5-Wege Navigation
2. HDMI™ 2.0b (FHD@180Hz)
3. DisplayPort 1.2a
4. Kopfhörerausgang
5. Stromanschluss
6. Kensington Lock

SPECIFICATION

Model	SKU Number	9S6-3BB31H-028
	Entity MKT Name	MAG 244CDE
	Part No	9S6-3BB31H-028
	Color	ID1/Black-Black
Display	Screen Size	23.6" (59.94 cm)
	Active Display Area (mm)	521.3952(H)x293.2848(V)
	Curvature	Curve 1500R
	Panel Type	VA
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.27156(H)x0.27156(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~180Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	250
	Contrast Ratio	3000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	55.3~200 KHz(H) /48~180 Hz(V)
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	92%/81%
	NTSC (CIE1931 area percentage/overlap)	77%/74%
	sRGB (CIE1976 area percentage/overlap)	105%/98%
	sRGB (CIE1931 area percentage/overlap)	109%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	90%/87%
	Adobe RGB (CIE1931 area percentage/overlap)	81%/79%
	DCI-P3 (CIE1976 area percentage/overlap)	84%/84%
	DCI-P3 (CIE1931 area percentage/overlap)	80%/80%
	Rec.709 (CIE1976 area percentage/overlap)	105%/98%
	Rec.709 (CIE1931 area percentage/overlap)	109%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	61%/61%
	Rec.2020 (CIE1931 area percentage/overlap)	58%/58%
	Surface Treatment	Anti-glare
Display Colors	1.07B	
Color bit	10 bits (8 bits + FRC)	
Schnittstellen	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	1
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	External Adaptor 12V 2.5A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	17
	Annual Energy Consumption (KWh)	17
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E
Power Cord Type	C13	

Zubehör	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	537.44 x 220.01 x 396.55
	Product Dimension without Stand (WxDxH) (mm)	537.44 x 86.07 x 319.74
	Stand Dimension (WxDxH) (mm)	318.04 x 220.01 x 142.52
	Weight (Net kg)	2.9
	Weight Without Stand (kg)	2.5
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	4.6
Barcode Info	EAN	4711377259163