

### PATH TO THE FUTURE


Der MAG 322URDFDE E16 Gaming-Monitor mit 27 Zoll Rapid IPS, Dual-Modus für UHD 160 Hz und FHD 320 Hz sowie DisplayHDR 400 für extrem flüssige Bilder. Entfessel dein volles Potenzial.



Picture and logos

### SELLING POINTS

- Dual-Modus - Einfaches Umschalten zwischen verschiedenen Auflösungen und Bildwiederholungsraten, sodass du die Einstellungen an das jeweilige Spiel anpassen kannst.
- Rapid IPS - Sorgt für intensive und reine Farben beim Gaming.
- 0,5 ms (GtG, min.) Reaktionszeit - Eliminiert Bildreißen und ruckelige Bildraten.
- VESA DisplayHDR 400 - VESA-zertifizierte auffällige Details durch präzise Kontrast- und Schattenanpassung.
- Konsolenmodus - Optimierte nahtlose Kompatibilität mit Spielekonsolen wie PS5 und Xbox Series X|S.
- Seitenverhältnisoptionen - Wähle zwischen mehreren Seitenverhältnissen für ein individuelleres Spielerlebnis.

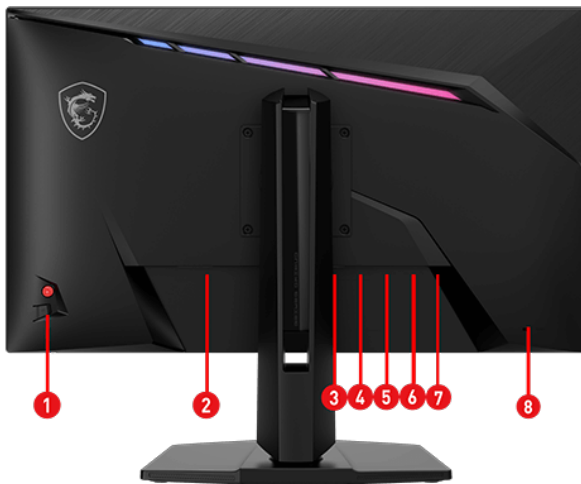

1. 5-Wege Joystick Navigation
2. Stromanschluss
3. 2 x HDMI™ 2.1 (UHD@160Hz)
4. DisplayPort 1.4a (HBR3)
5. USB 2.0 Typ-B
6. 2 x USB 2.0 Typ-A
7. Kopfhörerausgang
8. Kensington Lock

## SPECIFICATION

Model	Part No	9S6-3DD89T-001
	Color	ID1/Black-Black
Display	Screen Size	31.5" (80.01 cm)
	Active Display Area (mm)	695.04(H) x 390.96(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.181(H)x0.181(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	UHD : 48~160Hz , FHD : 48~320Hz
	HDR (High dynamic range)	VESA DisplayHDR 400
	SDR Brightness (nits)	400
	HDR Brightness (Peak nits)	450
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	10000000:1
	Signal Frequency	UHD:146.3~353.1 KHz(H) / 48~160 Hz(V), FHD:352.2~356.1 KHz(H) / 48~320 Hz(V)
	Refresh Rate	UHD:160Hz, FHD:320Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	0.5ms (Min.)
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	115%/89%
	NTSC (CIE1931 area percentage/overlap)	97%/86%
	sRGB (CIE1976 area percentage/overlap)	131%/100%
	sRGB (CIE1931 area percentage/overlap)	137%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	113%/93%
	Adobe RGB (CIE1931 area percentage/overlap)	102%/88%
	DCI-P3 (CIE1976 area percentage/overlap)	105%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	101%/99%
	Rec.709 (CIE1976 area percentage/overlap)	131%/100%
	Rec.709 (CIE1931 area percentage/overlap)	137%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	76%/76%
	Rec.2020 (CIE1931 area percentage/overlap)	73%/72%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)	
Schnittstellen	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
	Garantie	Warranty
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	SDR:33 HDR:80
	Annual Energy Consumption (KWh)	55
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
Power Cord Type	C13	

Zubehör	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	714.08 x 227.76 x 564.48
	Product Dimension without Stand (WxDxH) (mm)	714.08 x 72.93 x 421.29
	Stand Dimension (WxDxH) (mm)	308.52 x 227.9 x 411.28
	Weight (Net kg)	9 KG
	Weight Without Stand (kg)	6.5 KG
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	98.5 x 18.3 x 51.3
	Outer Carton Dimension (WxDxH) (cm)	100 x 19.8 x 53.6
	Weight (Gross kg)	13 KG
Barcode Info	EAN	4711377307383