

PATH TO THE FUTURE


Introducing the MSI MAG 274PFW esports gaming monitor. This cutting-edge monitor features a 27-inch FHD display with a lightning-fast 180Hz refresh rate and a rapid 1ms response time. With the MAG 274PFW, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

SELLING POINTS

- VA-Panel - Bietet eine 1ms MPRT Reaktionszeit, optimierte Bildschirmfarben und Helligkeit.
- 180Hz Bildwiederholrate - Reagiere schneller mit flüssigeren Frames.
- 1ms MPRT Reaktionszeit - Verhindert Screen Tearing und abgehackte Bildraten.
- AI Vision - Die neue AI Vision-Technologie kann nicht nur Details in dunklen Bereichen sichtbar machen, sondern auch die Gesamthelligkeit verbessern und Farben intensiver darstellen.
- Weniger Blaues Licht - Nutze eine Softwarelösung zur Reduzierung der Lichtemission im blau-violetten Bereich des blauen Lichtspektrums.

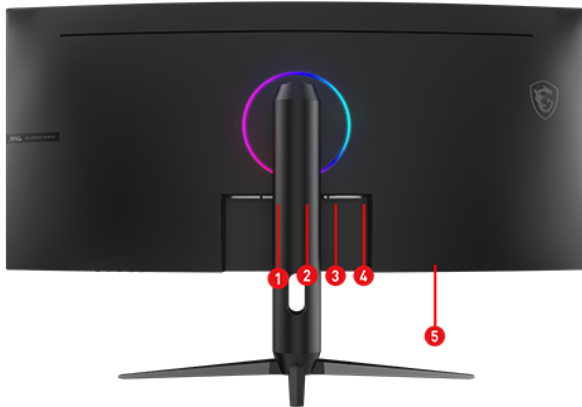

1. 2 x HDMI™ 2.0b(UWQHD@100Hz)
2. Display Port 1.4a
3. Earphone out
4. DC-in
5. Kensington Lock

SPECIFICATION

Model	Part No	9S6-3DB64H-083
	Color	ID1/Black-Black
Display	Screen Size	34" (86.36 cm)
	Active Display Area (mm)	797.22(H) x 333.72(V)
	Curvature	Curve 1500R
	Panel Type	VA
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.23175(H)x0.23175(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	FreeSync Premium
	Dynamic Refresh Rate Activated Range	48~180Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	3000:1
	DCR (Dynamic Contrast Ratio)	10000000:1
	Signal Frequency	68.47~268.2 KHz(H) / 48~180 Hz(V)
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	103%/88%
	NTSC (CIE1931 area percentage/overlap)	89%/83%
	sRGB (CIE1976 area percentage/overlap)	119%/99%
	sRGB (CIE1931 area percentage/overlap)	126%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	102%/93%
	Adobe RGB (CIE1931 area percentage/overlap)	93%/87%
	DCI-P3 (CIE1976 area percentage/overlap)	95%/95%
	DCI-P3 (CIE1931 area percentage/overlap)	93%/93%
	Rec.709 (CIE1976 area percentage/overlap)	119%/99%
	Rec.709 (CIE1931 area percentage/overlap)	126%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	69%/69%
	Rec.2020 (CIE1931 area percentage/overlap)	67%/67%
	Surface Treatment	Anti-glare
Display Colors	1.07B	
Color bit	10 bits (8 bits + FRC)	
Schnittstellen	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	External Adaptor 19V 3.42A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	31
	Annual Energy Consumption (KWh)	31
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
Power Cord Type	C13	

Zubehör	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 90 mm
	Adjustment (Pivot)	-5° ~ 5°
	VESA Mounting	75x75mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	808.60 x 269.97 x 513.97
	Product Dimension without Stand (WxDxH) (mm)	808.60 x 119.67 x 363.95
	Stand Dimension (WxDxH) (mm)	497.4 x 269.97 x 409.87
	Weight (Net kg)	6.95
	Weight Without Stand (kg)	5.4
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	94.8 x 21 x 48.7
	Outer Carton Dimension (WxDxH) (cm)	96.3 x 22.5 x 50.9
	Weight (Gross kg)	10.05
Barcode Info	EAN	4711377331975