

PATH TO THE FUTURE


Der MPG 321URXDE QD-OLED-Gaming-Monitor verfügt über ein 3840x2160 (UHD) QD-OLED-Panel der nächsten Generation, eine Bildwiederholfrequenz von 240 Hz und eine schnelle Reaktionszeit von 0,03 ms (GtG). Die VESA-Zertifizierung für ClearMR 13000 und DisplayHDR True Black 400 sorgt für außergewöhnlich lebendige Bilder und reduziert Bewegungsunschärfen. OLED Care 2.0 reduziert das Risiko des Einbrennens von OLEDs. Für Konsolenspieler bietet der MPG 321URXDE QD-OLED HDMI 2.1 Anschlüsse mit 48Gbps Bandbreite, 120Hz Unterstützung, VRR und ALLM.



Picture and logos

SELLING POINTS

- QD-OLED-Panel der dritten Generation - Mit atemberaubender Bildqualität und schneller Reaktionszeit.
- Schnelle 0,03ms GtG Reaktionszeit und 240Hz Bildwiederholrate.
- QD Premium Color - Die Farben entsprechen dem Marktstandard - Delta E ≤ 2.
- Unglaubliches HDR-Bild - VESA DisplayHDR True Black 400.
- Gaming Intelligence App - Erstelle die optimalen Anzeigeeinstellungen für deine Games.
- MSI OLED Care 2.0 - Reduziert das Risiko, dass OLED-Bilder einbrennen.
- KVM - Steuere mehrere Geräte über ein Set aus Tastatur, Maus und Monitor.
- Mystic Light - Der ultimative Gaming-Look.
- Konsolenmodus - Unterstützt HDMI™ 2.1 mit voller Bandbreite von 48 Gbps.
- Verstellbarer Standfuß - Verändere die Position des Monitors für maximale Ergonomie.

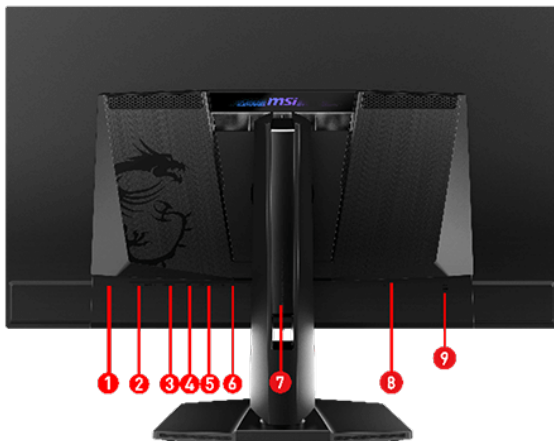

1. Kopfhörerausgang
2. 2 x HDMI™ (2.1)
3. Display Port (1.4a)
4. USB Typ-C (PD 90W)
5. USB 2.0 Typ-B
6. 2 x USB 2.0 Typ-A
7. 5 Wege Joysticknavigation
8. Stromanschluss
9. Kensingtonschloss



MONITOR

MPG 321URXDE QD-OLED

MPG 321URX QD-OLED

SPECIFICATION

Model	SKU Number	9S6-3DD29A-054
	Part No	9S6-3DD29A-054
	Color	ID1/Black-Black
Display	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	104.88~565.44 KHz(H) / 48~240.39 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120%/93%
	NTSC (CIE1931 area percentage/overlap)	103%/91%
	sRGB (CIE1976 area percentage/overlap)	138%/100%
	sRGB (CIE1931 area percentage/overlap)	146%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	118%/97%
	Adobe RGB (CIE1931 area percentage/overlap)	108%/94%
	DCI-P3 (CIE1976 area percentage/overlap)	110%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	107%/98%
	Rec.709 (CIE1976 area percentage/overlap)	138%/100%
	Rec.709 (CIE1931 area percentage/overlap)	146%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%/80%
	Rec.2020 (CIE1931 area percentage/overlap)	77%/77%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
Schnittstellen	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	44
	Annual Energy Consumption (KWh)	N/A
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
	Power Cord Type	C13

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	718 x 242 x 483
	Product Dimension without Stand (WxDxH) (mm)	718 x 69 x 418
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.6
	Weight Without Stand (kg)	6.7
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	97.5 x 18.5 x 51.5
	Outer Carton Dimension (WxDxH) (cm)	99.5 x 19.5 x 54
	Weight (Gross kg)	12.3
Barcode Info	EAN	4711377157698