

PATH TO THE FUTURE


MSI PRO MAX 271UPXW12G: Ein 27"; 4K QD-OLED 166PPI Monitor. Ausgestattet mit gleichmäßiger Helligkeit für konstante Helligkeit in SDR und HDR. Er liefert präzise Farben für die Benutzer und passt perfekt zu MacBook-Setups über die exklusive MSI M-Mate App.



Picture and logos

SELLING POINTS

- Die neueste 4th-Gen QD-OLED Panel – Mit beeindruckender Bildqualität und schneller Reaktionszeit.
- MSI M-Mate App Bietet dir intuitive Monitorsteuerung per Knopfdruck und verbindet deinen Monitor mit dem Mac.
- 5-lagiges Tandem-OLED-Panel mit EL Gen-3-Technik – Lichteffizienter um bis zu 30 %.
- DarkArmor Film- sorgt für 40 % tiefere Schwarztöne und eine 2,5-mal kratzfestere Bildschirmoberfläche..
- Uniform Luminance - HDR-Kurvenanpassung: Hier kannst du die HDR-Kurve individuell einstellen und ein gleichmäßiges HDR-Erlebnis genießen.
- MSI OLED Care 3.0 – AI Care Sensor reduziert das Risiko von OLED Einbrennen und Bildstörungen.
- Dual USB-C mit 98 W und 15 W zum einfachen Laden und Verbinden von Geräten.
- VisiClarity kombiniert Anti-Glare- und Low-Reflection-Technologie für weniger störendes Licht und klare, tiefe Bilddarstellung.
- Unglaubliche HDR-Bildqualität mit VESA DisplayHDR True Black 400.
- Spitzenhelligkeit bis zu 1000 Nits für ein erstklassiges HDR-Erlebnis
- Crystal-Clear Motion mit VESA ClearMR 7000 Zertifizierung.
- 3 Jahre Schutz vor Einbrennen.

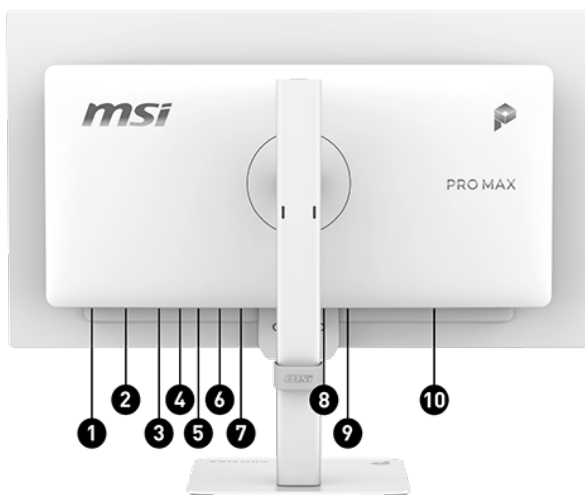

1. Kopfhörerausgang
2. 2x HDMI™ 2.1 (UHD@120Hz)
3. DisplayPort 1.4a
4. Typ-C (DP alt.) mit 15W PD
5. Typ-C (DP alt.) mit 98W PD
6. USB 5Gbps Typ-B
7. 2x USB 5Gbps Typ-A
8. Kensington Lock
9. 2x USB 5Gbps Typ-A
10. Stromanschluss

SPECIFICATION

Model	Part No	9S6-3PF9CA-001
	Color	ID1/White-White
Display	Screen Size	26.5" (67.31 cm)
	Active Display Area (mm)	589.97(H) x 332.93(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.153(H)x0.153(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	NVIDIA G-SYNC Compatible / AMD FreeSync™ Premium Pro
	Dynamic Refresh Rate Activated Range	48~120Hz
	HDR (High dynamic range)	VESA DisplayHDR True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	30~270 KHz(H) / 40~120 Hz(V)
	Refresh Rate	120Hz
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120.5%/93.8%
	NTSC (CIE1931 area percentage/overlap)	103.6%/91.5%
	sRGB (CIE1976 area percentage/overlap)	138.2%/100%
	sRGB (CIE1931 area percentage/overlap)	146.2%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	118.4%/97.5%
	Adobe RGB (CIE1931 area percentage/overlap)	108.4%/94%
	DCI-P3 (CIE1976 area percentage/overlap)	110.1%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	107.8%/98.4%
	Rec.709 (CIE1976 area percentage/overlap)	138.2%/100%
	Rec.709 (CIE1931 area percentage/overlap)	146.2%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80.2%/80.2%
	Rec.2020 (CIE1931 area percentage/overlap)	77.3%/77.3%
	Surface Treatment	Anti-Glare Low Reflection
	Display Colors	1.07B
	Color bit	10 bits
Schnittstellen	USB Type C (DisplayPort Alternate)	2
	Headphone-out	1
	USB 3.2 Gen 1 Type A	4
	USB 3.2 Gen 1 Type B	1
	Lock type	Kensington Lock
	Speaker	2.5Wx 2
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	25.6
	Annual Energy Consumption (KWh)	25.6
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
	Power Cord Type	C13



BUSINESS PRODUCTIVITY MONITOR

PRO MAX 271UPXW12G

PRO MAX 271UPXW12G

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 150 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	611.1 x 200.6 x 560.3
	Product Dimension without Stand (WxDxH) (mm)	611.1 x 73.0 x 367.9
	Stand Dimension (WxDxH) (mm)	224.1 x 200.6 x 436.1
	Weight (Net kg)	7.
	Weight Without Stand (kg)	4.6
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	81.2 x 14.2 x 47.8
	Outer Carton Dimension (WxDxH) (cm)	82.4 x 15.6 x 49.8
	Weight (Gross kg)	10.9
Barcode Info	EAN	4711377421270