


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Das aktuellste QD-OLED-Panel der 5. Generation – mit beeindruckender Bildqualität und schneller Reaktionszeit.
- Die MSI M-Mate App ermöglicht eine intuitive Monitorsteuerung und schafft eine einfache Verbindung zwischen deinem Monitor und Mac.
- Mit einem 5-lagigen Tandem-OLED-Panel und EL Gen 3-Technik profitierst du von einer Lichtausbeute bis zu 30 %
- DarkArmor Film sorgt für 40 % tiefere Schwarztöne und eine 2,5-mal kratzfestere Bildschirmoberfläche.
- Uniform Luminance mit HDR Anpassung ermöglicht dir, die HDR-Kurve individuell einzustellen und ein gleichmäßig abgestimmtes HDR-Erlebnis zu genießen.
- MSI OLED Care 3.0 mit AI Care Sensor reduziert das Risiko von OLED Nachbildern und Einbrennen.
- Die integrierten zwei USB-C Anschlüsse mit 98 W und 15 W PD ermöglichen das Laden deiner Geräte direkt am Monitor.
- VisiClarity integriert Anti-Glare Low Reflection, um störendes Licht zu reduzieren und für ein klares, ungespiegeltes Bild mit beeindruckender Tiefe zu sorgen.
- Beeindruckende HDR Darstellung mit VESA DisplayHDR True Black 500.
- Mit einem Spitzenwert von 1300 Nits wird dir ein helles und beeindruckendes HDR Bilderlebnis geboten.
- Kristallklare Bewegung mit VESA ClearMR 8000 Zertifizierung.
- 3 Jahre Schutz vor Burn-in, inklusive Absicherung gegen OLED Einbrennen.

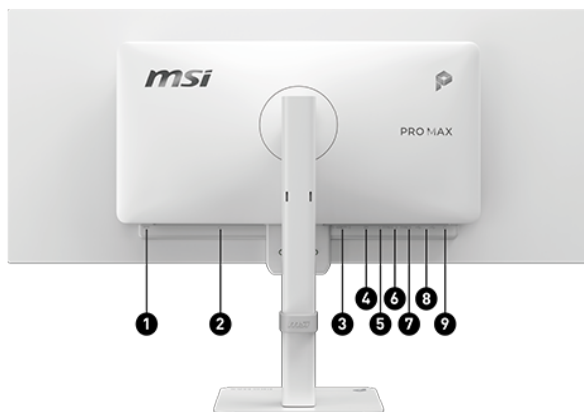

1. Kensington Lock
2. AC-in
3. 2x HDMI™ 2.1 (FRL 12G) (UWQHD@144Hz)
4. 1x DisplayPort 1.4a (HBR3)
5. 1x Type-C (DP alt.) w/ 98W PD
6. 1x Type-C (DP alt.) w/ 15W PD
7. 1x USB 5Gbps Type-B
8. 4x USB 5Gbps Type-A
9. 1x Headphone-out

SPECIFICATION

Model	SKU Number	9S6-3PFB9T-001
	Entity MKT Name	PRO MAX 341QPXW14G
	Part No	9S6-3PFB9T-001
	Color	ID1/White-White
	Local Dimming	TBD
Display	Screen Size	34" (86.36 cm)
	Active Display Area (mm)	800.06(H) x 337.06(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.2315(H)x0.2315(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~144Hz
	HDR (High dynamic range)	VESA DisplayHDR True Black 500
	SDR Brightness (nits)	300
	HDR Brightness (Peak nits)	1300
	Contrast Ratio	1500000:1
	DCR (Dynamic Contrast Ratio)	TBD
	Signal Frequency	237.2~239 KHz(H) / 48~144 Hz(V)
	Refresh Rate	144HZ
	Response Time (MPRT)	TBD
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	119%/94%
	NTSC (CIE1931 area percentage/overlap)	104.7%/91.8%
	sRGB (CIE1976 area percentage/overlap)	136.4%/99.8%
	sRGB (CIE1931 area percentage/overlap)	147.8%/99.9%
	Adobe RGB (CIE1976 area percentage/overlap)	116.9%/97.4%
	Adobe RGB (CIE1931 area percentage/overlap)	109.6%/94.1%
	DCI-P3 (CIE1976 area percentage/overlap)	108.6%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	109%/99.1%
	Rec.709 (CIE1976 area percentage/overlap)	136.4%/99.8%
	Rec.709 (CIE1931 area percentage/overlap)	147.8%/99.9%
	Rec.2020 (CIE1976 area percentage/overlap)	79.1%/79.1%
	Rec.2020 (CIE1931 area percentage/overlap)	78.2%/78.2%
	Surface Treatment	Anti-Glare Low Reflection
	Display Colors	1.07B
	Color bit	10 bits
Schnittstellen	USB Type C (DisplayPort Alternate)	2
	Headphone-out	1
	USB 3.2 Gen 1 Type A	4
	USB 3.2 Gen 1 Type B	1
	Lock type	Kensington Lock
	Speaker	3Wx 2
	HDMI	2
	HDMI version	2.1 (FRL 12G)
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
	Power Cord Type	C13



BUSINESS PRODUCTIVITY MONITOR

PRO MAX 341QPXW14G

PRO MAX 341QPXW14G

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	1
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 150 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	N/A
	Product Dimension without Stand (WxDxH) (mm)	N/A
	Stand Dimension (WxDxH) (mm)	N/A
	Weight (Net kg)	N/A
	Weight Without Stand (kg)	N/A
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	98.5 x 16.9 x 47.5
	Outer Carton Dimension (WxDxH) (cm)	100 x 18.4 x 49.8
	Weight (Gross kg)	N/A
Barcode Info	EAN	4711377438001