

Be Your Window To The World


Der MSI PRO MP2412WDE FHD-Monitor mit HDMI und DisplayPort-Schnittstellen ist für beste Bild- und Farbqualität optimiert. Er wurde für die professionelle Arbeit in den Bereichen Programmierung, Codierung und Website-Design entwickelt. Er zeigt nicht nur jede Zeile und jedes Detail für Ihre Projekte klar und deutlich, sondern mit ihm lässt Sie auch reibungsloseste Streaming- und Videoerlebnisse genießen



Picture and logos

SELLING POINTS

- Perfekte 23,8" Bildschirmgröße für Programmierung, Codierung und Webdesign-Arbeitsbereiche.
- TÜV-zertifiziertes Display sorgt für Schutz und Gesundheit der Augen.
- MSI EyesErgo-Technologie mit Anti-Flicker-Technologie hilft, Augenbelastung und Ermüdung zu verhindern.
- 100 Hz Bildwiederholrate für eine bessere Anzeige mit flimmerfreiem Bild.
- MSI Eye-Q Check ermöglicht Augen-Selbsttests und erinnert daran, Pausen einzulegen bei längerer Nutzung.
- Vielseitigkeit durch mehrere Eingangsquellen wie HDMI™ - und DisplayPort-Anschlüsse.
- Saubere Umgebung dank praktischem und abnehmbarem Kabelmanagement-Design.
- Standard VESA-kompatibel und Zubehörslot-Design.

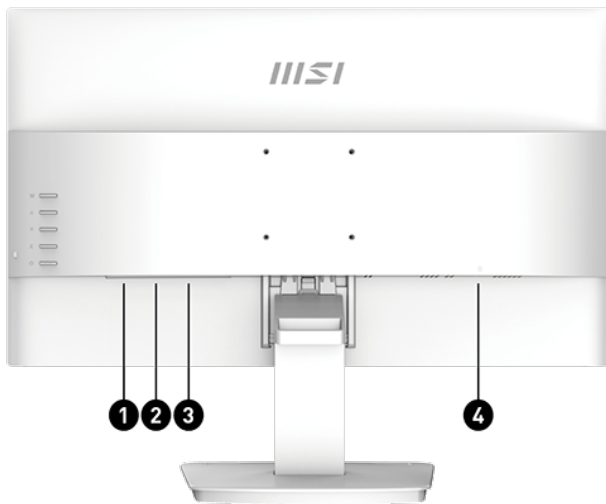

1. 1x DC Jack
2. 1x DisplayPort 1.2a
3. 1x HDMI™ (1.4b)
4. 1x Kensington Lock
5. OSD Buttons

SPECIFICATION

Model	Part No	9S6-3BA9CH-083
	Color	ID1/White-White
Display	Screen Size	23.8" (60cm)
	Active Display Area (mm)	527.04(H)x296.46(V)
	Curvature	Flat
	Panel Type	VA
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.2745(H)x0.2745(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~100Hz
	SDR Brightness (nits)	250
	Contrast Ratio	3000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	52.6~110 KHz(H) / 48~100 Hz(V)
	Refresh Rate	100HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	99%/80%
	NTSC (CIE1931 area percentage/overlap)	78%/73%
	sRGB (CIE1976 area percentage/overlap)	113%/99%
	sRGB (CIE1931 area percentage/overlap)	110%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	97%/86%
	Adobe RGB (CIE1931 area percentage/overlap)	82%/78%
	DCI-P3 (CIE1976 area percentage/overlap)	90%/85%
	DCI-P3 (CIE1931 area percentage/overlap)	81%/80%
	Rec.709 (CIE1976 area percentage/overlap)	113%/99%
	Rec.709 (CIE1931 area percentage/overlap)	110%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	65%/65%
	Rec.2020 (CIE1931 area percentage/overlap)	58%/58%
	Surface Treatment	Anti-glare
	Display Colors	16.7M
	Color bit	8 bits (6 bits + FRC)
Schnittstellen	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	1
	HDMI version	1.4b
	HDMI HDCP version	1.4
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	1.3
Garantie	Warranty	24M
Power	Power Type	External Adaptor 12V 2.5A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	18
	Annual Energy Consumption (KWh)	18
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E
	Power Cord Type	C13



PRO MP2412WDE

PRO MP2412W

Zubehör	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	75x75mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	541.9 x 182.0 x 428.5
	Product Dimension without Stand (WxDxH) (mm)	541.9 x 51.4 x 322.2
	Stand Dimension (WxDxH) (mm)	237.3 x 182.0 x 175.9
	Weight (Net kg)	2.9
	Weight Without Stand (kg)	2.5
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	60.5 x 11.6 x 40.7
	Outer Carton Dimension (WxDxH) (cm)	62 x 13 x 43.1
	Weight (Gross kg)	4.75
Barcode Info	EAN	4711377330152