

Business & Productivity Monitor


Entdecken Sie unseren PerfectEdge Monitor PRO MP242PMG mit integrierter Webcam, der entwickelt wurde, um strengen Umweltstandards zu entsprechen und eine sauberere, grünere Welt zu gewährleisten. Mit EyesErgo und einem vollergonomischen Standfuß steht alles für das Wohlbefinden der Nutzer bereit.



Picture and logos

SELLING POINTS

- Integrierte FHD-Webcam mit digitalem Mikrofon und Webcam-Abdeckung
- TÜV-zertifiziertes Display sorgt für den Schutz und die Gesundheit der Augen.
- MSI EyesErgo-Technologie mit Anti-Flicker-Technologie hilft, Augenbelastung und Ermüdung zu vermeiden.
- Die Bildwiederholrate von 120 Hz bietet ein besseres Seherlebnis mit flimmerfreiem Bild.
- MSI Eye-Q Check hilft bei der Selbstkontrolle der Augen und erinnert daran, bei längerer Nutzung des Monitors Pausen einzulegen.
- Der Standfuß ist ergonomisch gestaltet und bietet Neigungs-, Schwenk-, Höhen- und Drehverstellung.
- Ein verstellbarer Standfuß mit mini-PC-montierbarem Design sorgt für eine bessere Ergonomie und einen aufgeräumten Arbeitsplatz, was den Benutzerkomfort und die Organisation verbessert.
- Standard-VESA-kompatibel und mit Zubehörsteckplatz ausgestattet.
- Zwei integrierte Lautsprecher.

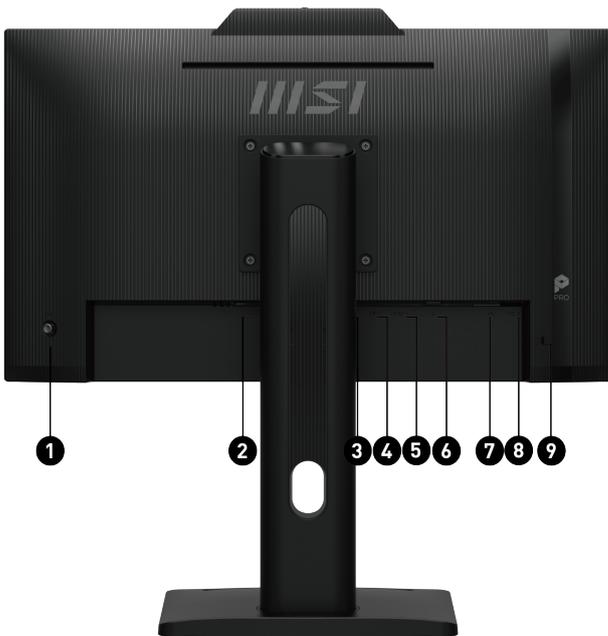

1. 5-Wege Navigation
2. Stromanschluss
3. 1x Kopfhörerausgang
4. 1x DisplayPort 1.2a
5. 1x HDMI™ 1.4b (FHD@120Hz)
6. 1x D-Sub (VGA)
7. 2x USB 2.0 Typ-A
8. 1x USB 2.0 Typ-B
9. Kensington Lock

SPECIFICATION

Model	SKU Number	9S6-3PD89T-002	
	Entity MKT Name	PRO MP242PMGDE	
	Part No	9S6-3PD89T-002	
	Color	ID1/Black-Black	
Display	Screen Size	23.8" (60cm)	
	Active Display Area (mm)	527.04(H) x 296.46(V)	
	Curvature	Flat	
	Panel Type	IPS	
	Resolution	1920x1080 (FHD)	
	Pixel pitch (mm)	0.2745(H)x0.2745(V)	
	Aspect Ratio	16:9	
	Dynamic Refresh Rate technology	Adaptive-Sync	
	Dynamic Refresh Rate Activated Range	48~120Hz	
	HDR (High dynamic range)	HDR Ready	
	SDR Brightness (nits)	300	
	Contrast Ratio	1500:1	
	DCR (Dynamic Contrast Ratio)	100000000:1	
	Signal Frequency	47.11~144.23 KHz(H) / 48~120 Hz(V)	
	Refresh Rate	120Hz	
	Response Time (MPRT)	1ms(MPRT)	
	Response Time (GTG)	4ms	
	View Angles	178°(H)/178°(V)	
	NTSC (CIE1976 area percentage/overlap)	100%/80%	
	NTSC (CIE1931 area percentage/overlap)	79%/72%	
	sRGB (CIE1976 area percentage/overlap)	115%/99%	
	sRGB (CIE1931 area percentage/overlap)	111%/99%	
	Adobe RGB (CIE1976 area percentage/overlap)	98%/86%	
	Adobe RGB (CIE1931 area percentage/overlap)	82%/77%	
	DCI-P3 (CIE1976 area percentage/overlap)	91%/89%	
	DCI-P3 (CIE1931 area percentage/overlap)	82%/81%	
	Rec.709 (CIE1976 area percentage/overlap)	115%/99%	
	Rec.709 (CIE1931 area percentage/overlap)	111%/99%	
	Rec.2020 (CIE1976 area percentage/overlap)	67%/67%	
	Rec.2020 (CIE1931 area percentage/overlap)	59%/59%	
	Surface Treatment	Anti-glare	
	Display Colors	16.7M	
Color bit	8 bits (6 bits + FRC)		
Schnittstellen	D-Sub	1	
	Headphone-out	1	
	USB 2.0 Type A	2	
	USB 2.0 Type B	1	
	Lock type	Kensington Lock	
	Speaker	2	
	HDMI	1	
	HDMI version	1.4b	
	HDMI HDCP version	1.4	
	DisplayPort	1	
	DisplayPort version	1.2a	
	DisplayPort HDCP version	1.3	
	Garantie	Warranty	24M
Power	Power Type	Power Cable	
	Power Input	100~240V, 50/60Hz	
	On-mode Power Consumption (KWh/1000h)	TBD	
	Standby-mode Power Consumption (W)	0.5	
	Off-mode Power Consumption (W)	0.3	
	Energy Efficiency Rating	E	
	Power Cord Type	C13	

Zubehör	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	612 x 227 x 429
	Product Dimension without Stand (WxDxH) (mm)	612 x 54 x 376
	Stand Dimension (WxDxH) (mm)	260 x 227 x 412
	Weight (Net kg)	TBD
	Weight Without Stand (kg)	TBD
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	60 x 14 x 41
	Outer Carton Dimension (WxDxH) (cm)	61.5 x 15.5 x 43.3
	Weight (Gross kg)	TBD
Barcode Info	EAN	4711377260411