

PATH TO THE FUTURE

<h2 style =




Selling Points

- Windows® 11 Home (MSI recomienda Windows 11 Pro para empresa.)
- Intel® Celeron® 5205U / Intel® Pentium®Gold 6405U Processor
- 15.6" LCD Panel LED Backlight (1366*768) / Single Touch (PRO 16T 10M)
- Fan-less Design
- HDD Caddy support 2.5" storage
- Anti-Glare Display
- COM Port x 2 / RJ-45 LAN x 2 / USB 3.2 Gen 1 x 4 / USB2.0 x 2 / VGA-out x 1 / Printer Port x 1



Picture and logos

System I/O-Ports

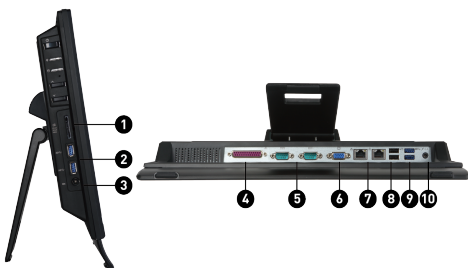

1. 1x Card Reader
2. 2x USB 3.2 Gen 1 Type A
3. 1x DC-in
4. 1x Parallel Port (Printer Port)
5. 2x COM port
6. 1x VGA-out
7. 2x RJ45
8. 2x USB 2.0 Type A
9. 2x USB 3.2 Gen 1 Type A
10. 1x Line-out/Microphone-in

Specification

Operating Systems	Operating Systems	N/A
Display	Screen Size	15.6" (40 cm)
	Active Display Area (mm)	344.132(H)x193.436(V)
	Curvature	Flat
	Panel Type	TN
	Resolution	1366x768 (HD)
	Pixel pitch	0.252(H)x0.252(V)
	Brightness (nits)	220
	Contrast Ratio	500:1
	Signal Frequency	31.84~48.24 KHz(H) / 40~60 Hz(V)
	Response Time (GTG)	10 ms
	View Angles	45°(H)/45°(V)
	Surface Treatment	Anti-Glare
	Touch Screen	Single Point Resistive Touch Screen
	Display Colors	262K
I/O Ports	Lock type	Kensington
Processor	CPU Number	Intel Celeron 5205U
	CPU Clock	1.9GHz
	CPU Cores	2
	Cache	2MB
	Threads	2
Chipset	Chipsets	N/A
Memory	Memory Size	4GB(4GB*1)
	Memory Type	DDR4 SDRAM
	Memory Speed	1333(2666)MHz
	Module Type	SO-DIMM
	Memory Slot(Total)	2
	Memory Slot(Free)	1
	Max Capacity	Max 32GB
Storage	SSD Interface	PCIe GEN3x4 NVMe
	SSD Form Factor	M.2-2280 M-KEY
	SSD Config	256GB*1
	SSD Size	256GB
	HDD1 Interface	N/A
	HDD1 Form Factor	N/A
	HDD1 Size	N/A
	HDD1 RPM	N/A
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
	M.2 slots(Total)	1
	M.2 slots(Free)	0
	2.5" Drive Bays(Total)	1
2.5" Drive Bays (Free)	1	
Communications	LAN	Realtek RTL8111H
	WLAN	INTEL/AX201.NG.WG.NVW
	WLAN Version	802.11ax 2x2+BT
	BT Version	5.2
Audio	Audio Chipset	Realtek ALC233
	Audio Type	7.1 Channel HD Audio
I/O Ports (Front)	USB 3.2 Gen 1 Type A	2
I/O Ports (Rear)	USB 3.2 Gen 1 Type A (R)	2
	USB 2.0 Type A (R)	2
	RJ45	2
	Card Reader	1
	VGA out	1
	COM Port	2
	Mic-in/Headphone-out combo (R)	1
	Printer Port (Parallel)	1



BUSINESS & PRODUCTIVITY PC ALL-IN-ONE

PRO 16T 10M

PRO 16T 10M-079XEU

Power	AC Adapter Output	65W
	Battery	N/A
	Battery Whrs	N/A
Accessories	Keyboard Interface	N/A
	Mouse Interface	N/A
	Power Cord	1
	AC Adaptor	1
	Warranty Card	N/A
	Quick Guide	3
	User Manual	N/A
	VESA Mount kit	N/A
	Keyboard	N/A
	Mouse	N/A
	Input Device	WebCam
Mechanical and Environmental	Operating, Storage Temperature	0° C ~ 35° C ; -20° C ~ 60° C
	Operating, Storage Humidity	0% ~ 85%;0% ~ 90%
	Regulatory Compliance	FCC(Class B) CB/CE UL(CUL) BSMI VCCI RCM(C-Tick)
Design	Adjustment (Tilt)	N/A
	Adjustment (Swivel)	N/A
	Adjustment (Height)	N/A
	Adjustment (Pivot)	N/A
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	N/A
	Product Dimension with Stand (WxDxH) (inch)	N/A
Dimension&Weight	Weight (Net kg)	N/A
	Weight (Gross kg)	N/A
	Product Dimension with Holder (WxDxH) (mm)	399.5 x 69.2 x 313.9
	Product Dimension with Holder (WxDxH) (inch)	15.73 x 2.72 x 12.36
	Inside Carton Dimension with Holder (WxDxH) (mm)	N/A
	Inside Carton Dimension with Holder (WxDxH) (inch)	N/A
	Inside Carton Dimension with Stand (WxDxH) (mm)	N/A
	Inside Carton Dimension with Stand (WxDxH) (inch)	N/A
	Outer Carton Dimension with Holder (WxDxH) (mm)	528 x 183 x 393
Warranty	Warranty	36M
Model	Part No	9S6-A61811-204
	Entity MKT Name	PRO 16T 10M-079XEU-B5205U4GS25XXASS
	Color	ID1/Black-Black-Black
Barcode Info	EAN	4719072919634