


## Stable Foundation, Durably Built



Picture and logos

## SELLING POINTS

- Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
- Supports DDR5 Memory, Dual Channel DDR5 8200+ MT/s (OC)
- Ultra Performance: 14+2+1 Duet Rail Power System, dual 8-pin CPU power connectors, Core Boost, Memory Boost, 6-layer PCB made by 2oz thickened copper and server-grade level material
- Frozr Guard: Extended Heatsink, MOSFET thermal pads rated for 7W/mK, additional choke thermal pads and EZ M.2 Shield Frozr II are built for high performance system and non-stop experience
- EZ DIY: EZ M.2 Shield Frozr II, EZ M.2 Clip II, EZ PCIe Release and EZ Antenna
- Lightning Fast Game experience: PCIe 5.0 slot, Lightning Gen 5 x4 M.2, Front USB Type-C
- 5G LAN with Wi-Fi 7 Solution: the latest solution for professional and multimedia use, delivering secure, stable, and high-speed networking and data transmission
- Audio Boost 5: Reward your ears with studio-grade sound quality for the most immersive gaming experience

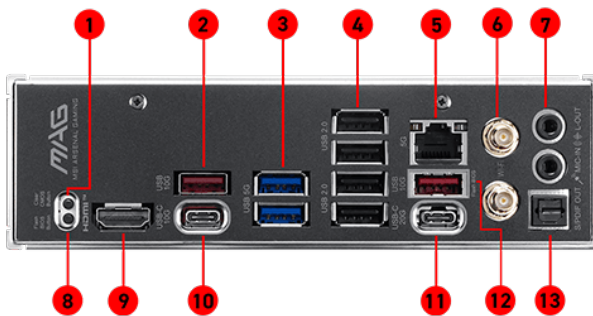

1. Clear CMOS Button
2. USB 10Gbps (Type-A)
3. USB 5Gbps (Type-A)
4. USB 2.0
5. 5G LAN
6. Wi-Fi / Bluetooth
7. Audio Connectors
8. Flash BIOS Button
9. HDMI™
10. USB 10Gbps (Type-C)
11. USB 20Gbps (Type-C)
12. USB 10Gbps (Type-A)
13. Optical S/PDIF Out

**SPECIFICATION**

Chipset	Platforma	AMD
	Marketing Name del chipset	B850
CPU SUPPORT	CPU Support	Supports AMD Ryzen™ 9000/ 8000/ 7000 Series Desktop Processors
	Socket	Socket AM5
Memoria	Memory Qty	4
	Tipo de memoria	DDR5 UDIMM
Onboard Graphics	HDMI™	1
	DVI	N/A
	D-Sub	N/A
	Onboard Graphics note	*Available only on processors featuring integrated graphics. Graphics specifications may vary depending on the CPU installed.
EXPANSION SLOT	PCI-E x16 slot (Qty)	2
	PCI-E x1 slot (Qty)	1
	PCI slot (Qty)	N/A
	PCI_E1 Gen	PCIe 5.0
	PCI_E1 bandwidth	x16
	PCI_E2 Gen	PCIe 4.0
	PCI_E2 bandwidth	x4
	PCI_E3 Gen	PCIe 3.0
	PCI_E3 bandwidth	x1
	PCI_E4 Gen	N/A
	PCI_E4 bandwidth	N/A
	PCI_E5 Gen	N/A
	PCI_E5 bandwidth	N/A
	PCI_E6 Gen	N/A
PCI_E6 bandwidth	N/A	
Almacenamiento	U.2 (Qty)	N/A
	M.2 (Qty)	3
	M.2_1 (Gen3/Gen4/Gen5)	PCIe 5.0 x4
	M.2_1 (SATA mode)	N/A
	M.2_2 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_2 (SATA mode)	N/A
	M.2_3 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_3 (SATA mode)	N/A
	M.2_4 (Gen3/Gen4/Gen5)	N/A
	M.2_4 (SATA mode)	N/A
	M.2_5 (Gen3/Gen4/Gen5)	N/A
	M.2_5 (SATA mode)	N/A
	M.2_6 (Gen3/Gen4/Gen5)	N/A
	M.2_6 (SATA mode)	N/A
M.2_7 (Gen3/Gen4/Gen5)	N/A	
M.2_7 (SATA mode)	N/A	
SATA 6G (Qty)	4	
Multi-GPU	Supports NVIDIA® SLI™ Technology	N/A
	AMD MULTI-GPU Support	Yes
LAN	AMD Chip	Realtek® 8126VB 5G LAN
WIRELESS / BLUETOOTH	Módulo Wi-Fi	Wi-Fi 7 Solution
	Bluetooth SPEC	Supports Bluetooth® 5.4**, MLO, 4KQAM
BACK PANEL PORTS	Descripción de E/S	
	PCB Dimension (W x L)	Factor de forma PCB

\*2026-04-01 Changes to the product specifications and errors excepted. The product presentation may differ from the product. Microsoft, Windows, the Windows logo, and DirectX are trademarks or registered trademarks of Microsoft Corporation in the United States and / or other countries. Intel, the Intel logo, Intel Inside, the Intel Inside logo, Intel Core and Core Inside are trademarks of Intel Corporation in the US and other countries. Other trademarks and trade names refer to the respective owners or their products.\*