


Be Your Window To The World



Picture and logos

SELLING POINTS

- Windows 11 Famille - MSI recommande Windows 11 Professionnel pour les entreprises
- Processeur Intel® Alder Lake N100 / N200 avec mémoire DDR4
- Dalle 15,6" antireflet et tactile, idéale pour une utilisation commerciale
- Design de refroidissement sans ventilateur et technologie dTPM 2.0
- Deux ports COM, six ports USB et un port parallèle pour connecter des terminaux de point de vente
- Connexion d'un second écran avec le connecteur VGA
- Deux connecteurs LAN pour disposer d'une connexion de secours et d'un environnement plus sécurisé
- Fixations VESA, lecteur de carte mémoire et baie de disque dur 2,5"

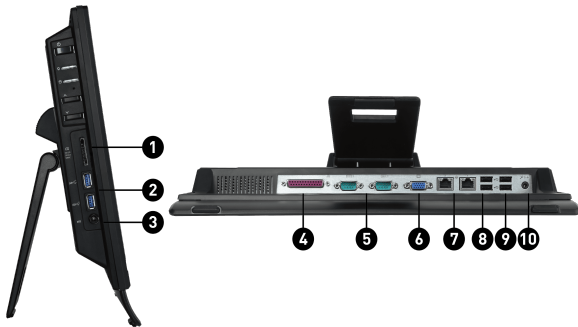

1. 1x Card reader
2. 2 x USB 3.2 Gen 2 Type A
3. 1x DC-in
4. 1 x Parallel Port (Printer Port)
5. 2 x Serial Port (COM Port)
6. 1 x VGA Port
7. 2 x RJ-45 LAN
8. 2 x USB 2.0 Type A
9. 2 x USB 2.0 Type A
10. 1 x Line-out/Microphone-in

SPECIFICATION

Système d'exploitation	Systèmes d'exploitation	N/A
Processeur	CPU Number	Intel Processor N100
	CPU Clock	0.8GHz
	CPU Cores	4
	TDP	6W
	Cache	6 MB
	Threads	4
	Max Turbo Frequency	up to 3.40 GHz
Chipset	Chipsets	SoC
Graphismes	GPU1 VRAM Size	N/A
	GPU1 VRAM Type	N/A
	GPU1 Vendor	N/A
	GPU1 MKT Name	N/A
Mémoire	Memory Size	4GB(4GB*1)
	Memory Type	DDR4 SDRAM
	Module Type	SO-DIMM
	Memory Slot (Total/Free)	1/0
	Max Capacity	Max 16GB
Stockage	SSD Interface	PCIe GEN4x4
	SSD Form Factor	M.2-2280 M-KEY
	SSD Config	256GB*1
	SSD Size	256GB
	HDD1 Interface	N/A
	HDD1 Form Factor	N/A
	HDD1 Size	N/A
	HDD1 RPM	N/A
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
	M.2 slots (Total/Free)	1/0
	2.5" Drive Bays (Total/Free)	1/1
	3.5" Drive Bays (Total/Free)	0/
mSATA slots(Free)	0	
Audio	Audio Chipset	Realtek ALC256
	Audio Type	2.1 Channel HD Audio
Communication	LAN	Realtek RTL8111H
	WLAN Version	802.11ac 1x1+BT
	BT Version	5
Ports E/S (avant)	WLAN	INTEL/9462.NGWG.NV
	USB 3.2 Gen 2 Type A	2
Ports E/S (arrière)	Card Reader	1
	USB 2.0 Type A (R)	4
	RJ45	2
	VGA out	1
	COM Port	2
	Mic-in/Headphone-out combo (R)	1
	Printer Port (Parallel)	1
	Lock type	Kensington
Alimentation	AC Adapter Output	65W
	Battery	N/A
	Battery Whrs	N/A

Dimensions et poids	Weight (Net kg)	3.962
	Weight (Gross kg)	5.369
	Product Dimension with Holder (WxDxH) (mm)	399.5 x 69.2 x 313.9
	Inside Carton Dimension with Holder (WxDxH) (mm)	N/A
	Inside Carton Dimension with Stand (WxDxH) (mm)	N/A
	Outer Carton Dimension with Holder (WxDxH) (mm)	574 Wireless KB.MS / 534 Wired KB.MS x 189 Wireless KB.MS / 189 Wired KB.MS x 405 Wireless KB.MS / 405 Wireless KB.MS
Dimensions du produit avec support (LxPxH)	Product Dimension with Stand (WxDxH) (mm)	N/A
Périphérique d'entrée	WebCam	internal webcam
Mécanique et environnement	Operating, Storage Temperature	0° C ~ 35° C ; -20° C ~ 60° C
	Operating, Storage Humidity	0% ~ 85%;0% ~ 90%
	Regulatory Compliance	FCC(Class B), CB/CE, UL(CUL), BSMI, VCCI, RCM(C-Tick)
Garantie	Warranty	24months
Accessoires	Keyboard Interface	WIRELESS
	Mouse Interface	WIRELESS
	Power Cord	1
	AC Adaptor	1
	Warranty Card	N/A
	Quick Guide	3
	User Manual	N/A
	VESA Mount kit	N/A
	Keyboard	RF1430
	Mouse	MA04
Code-barre	EAN	4711377212656
Affichage	Screen Size	15.6" (40 cm)
	Active Display Area (mm)	344.232(H)x193.536(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Brightness (nits)	250
	Refresh Rate	60Hz
	Response Time (GTG)	25ms Typ
	View Angles	178°(H)/178°(V)
	Touch Screen	Single Point Resistive Touch Screen
Display Colors	16.7M	
Modèle	Part No	9S6-A60211-025
	MKT Name	PRO AP162T ADL
	MKT Spec	PRO AP162T ADL-025XFR
	Color	ID1/Black-Black-Black
	Model	A602