


SIMPLICITÉ ABSOLUE



Picture and logos


SELLING POINTS

- Support des processeurs Intel® Core™ de 12e, 13e et 14e génération, Pentium® et Celeron® pour socket LGA 1700
- Support mémoire DDR5, jusqu'à 7800+ (OC) MHz
- Alimentation directe à 12+1+1 phases à double rail, deux connecteurs d'alimentation, technologies Core Boost et Memory Boost
- Expérience ultrarapide avec des slots PCIe 5.0, Lightning Gen 4 x4 M.2 et USB 3.2 Gen2x2
- Solution de refroidissement complète avec dissipateur plus large et slots M.2 Shield Frozr
- Audio Boost pour un son de qualité et une expérience immersive
- Circuit imprimé de classe serveur à 6 couches de cuivre de 2 onces

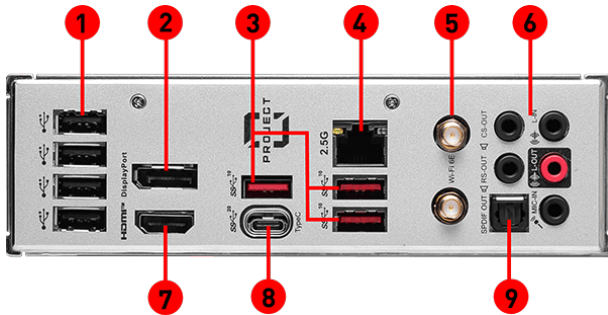

1. USB 2.0
2. DisplayPort 1.4
3. USB 3.2 Gen2 10 Gb/s Type-A
4. 2.5G LAN
5. Wi-Fi / Bluetooth
6. Jacks audio HD
7. HDMI™ 2.1
8. USB 3.2 Gen 2x2 20 Gb/s Type-C
9. Sortie S/PDIF optique

SPECIFICATION

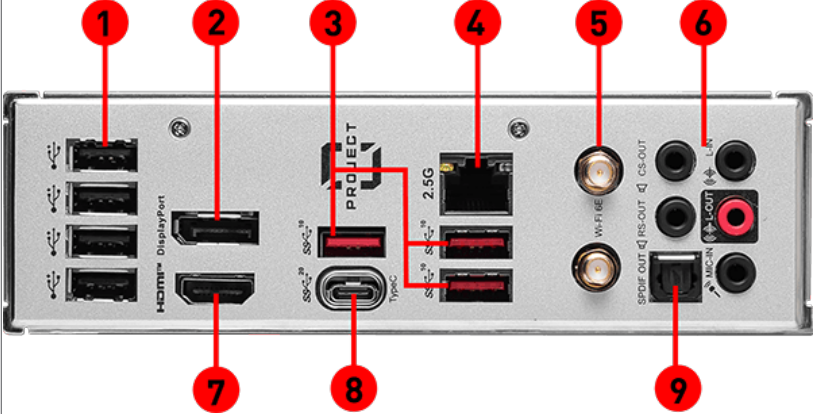CPU	Platform	INTEL
	Chipset Marketing Name	B760
	CPU Support	Supports 12th/13th Gen Intel® Core™ Processors, Pentium® Gold and Celeron® Processors
	Socket	LGA1700
Mémoire	Memory Qty	4
	cmsfront_lang_auto_spec.sku_column_title_1120	DDR5
Onboard Graphics	cmsfront_lang_auto_spec.sku_column_title_1121	1
	cmsfront_lang_auto_spec.sku_column_title_1123	N/A
	cmsfront_lang_auto_spec.sku_column_title_1124	N/A
	Onboard Graphics note	*Available only on processors featuring integrated graphics. Graphics specifications may vary depending on the CPU installed.
Slot	PCI-E x16 slot (Qty)	2
	PCI-E x1 slot (Qty)	1
	PCI slot (Qty)	N/A
	PCI_E1 Gen	PCIe 5.0
	PCI_E1 bandwidth	x16
	PCI_E2 Gen	PCIe 3.0
	PCI_E2 bandwidth	x1
	PCI_E3 Gen	PCIe 4.0
	PCI_E3 bandwidth	x4
	PCI_E4 Gen	N/A
	PCI_E4 bandwidth	N/A
	PCI_E5 Gen	N/A
	PCI_E5 bandwidth	N/A
	PCI_E6 Gen	N/A
	PCI_E6 bandwidth	N/A
Multi-GPU	Supports NVIDIA® SLI™ Technology	N/A
	AMD MULTI-GPU Support	N/A
Stockage	U.2 (Qty)	N/A
	M.2 (Qty)	2
	M.2_1 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_1 (SATA mode)	N/A
	M.2_2 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_2 (SATA mode)	Yes
	M.2_3 (Gen3/Gen4/Gen5)	N/A
	M.2_3 (SATA mode)	N/A
	M.2_4 (Gen3/Gen4/Gen5)	N/A
	M.2_4 (SATA mode)	N/A
	M.2_5 (Gen3/Gen4/Gen5)	N/A
	M.2_5 (SATA mode)	N/A
	M.2_6 (Gen3/Gen4/Gen5)	N/A
	M.2_6 (SATA mode)	N/A
	M.2_7 (Gen3/Gen4/Gen5)	N/A
	M.2_7 (SATA mode)	N/A
LAN	SATA 6G (Qty)	4
	LAN Chip	Realtek® 2.5Gbps LAN
WIRELESS LAN & BLUETOOTH	Wi-Fi Module	Intel® Wi-Fi 6E
	Bluetooth SPEC	Supports Bluetooth® 5.3, FIPS, FISMA
BACK PANEL PORTS	I/O Description	 1. USB 2.0 2. DisplayPort 1.4 3. USB 3.2 Gen 2 10Gbps Type-A 4. 2.5G LAN Port 5. Wi-Fi / Bluetooth Antenna 6. HD Audio Connectors 7. HDMI™ 2.1 Port 8. USB 3.2 Gen 2x2 20Gbps Type-C 9. Optical S/PDIF OUT
	PCB Info	PCB Form Factor mATX