

PATH TO THE FUTURE


Introducing the MSI MAG 274QPF E20 esports gaming monitor. This cutting-edge monitor features a 27-inch WQHD display with a lightning-fast 200Hz refresh rate and a rapid 0.5ms (GtG, Min.) response time. With the MAG 274QPF E20, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.



Picture and logos

SELLING POINTS

- Dalle Rapid IPS pour des couleurs et une luminosité optimales
- Taux de rafraîchissement de 200 Hz pour un affichage sans ralentissement
- Temps de réponse gris à gris de 0,5 ms (minimum) pour des images sans déchirures ni saccades
- Nouvelle technologie AI Vision cadencée par l'IA pour mieux discerner les détails dans les zones sombres
- Réduction de la lumière bleue grâce à une solution logicielle

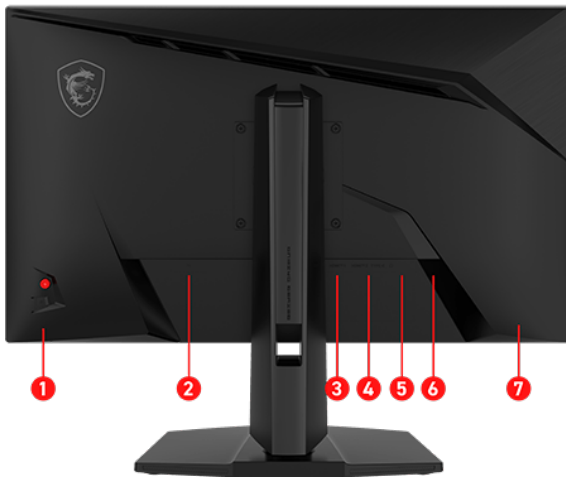

1. Bouton de navigation à 5 directions
2. Entrée alimentation CA
3. DisplayPort 1.4a (HBR3)
4. 2 x HDMI™ 2.0b (WQHD@144Hz)
5. Type-C (DP alt.) avec Power Delivery 15 W
6. Sortie audio
7. Encoche Kensington

SPECIFICATION

| | | |
|-----------------|---|-----------------------------|
| Modèle | Part No | 9S6-3CF69T-001 |
| | Color | ID1/Black-Black |
| | Local Dimming | 4 Zones |
| Affichage | Screen Size | 27" (68.58 cm) |
| | Active Display Area (mm) | 596.736(H) x 335.664(V) |
| | Curvature | Flat |
| | Panel Type | Rapid IPS |
| | Resolution | 2560x1440 (WQHD) |
| | Pixel pitch (mm) | 0.2331(H)x0.2331(V) |
| | Aspect Ratio | 16:9 |
| | Dynamic Refresh Rate technology | Adaptive-Sync |
| | Dynamic Refresh Rate Activated Range | 48~200Hz |
| | HDR (High dynamic range) | VESA DisplayHDR 400 |
| | SDR Brightness (nits) | 300 |
| | Contrast Ratio | 1000:1 |
| | DCR (Dynamic Contrast Ratio) | 100000000:1 |
| | Signal Frequency | 72~300 KHz(H) /48~200 Hz(V) |
| | Refresh Rate | 200HZ |
| | Response Time (GTG) | 0.5ms (Min.) |
| | View Angles | 178°(H)/178°(V) |
| | NTSC (CIE1976 area percentage/overlap) | TBD |
| | NTSC (CIE1931 area percentage/overlap) | TBD |
| | sRGB (CIE1976 area percentage/overlap) | TBD |
| | sRGB (CIE1931 area percentage/overlap) | TBD |
| | Adobe RGB (CIE1976 area percentage/overlap) | TBD |
| | Adobe RGB (CIE1931 area percentage/overlap) | TBD |
| | DCI-P3 (CIE1976 area percentage/overlap) | TBD |
| | DCI-P3 (CIE1931 area percentage/overlap) | TBD |
| | Rec.709 (CIE1976 area percentage/overlap) | TBD |
| | Rec.709 (CIE1931 area percentage/overlap) | TBD |
| | Rec.2020 (CIE1976 area percentage/overlap) | TBD |
| | Rec.2020 (CIE1931 area percentage/overlap) | TBD |
| | Surface Treatment | Anti-glare |
| | Display Colors | 1.07B |
| | Color bit | 10 bits (8 bits + FRC) |
| Ports E/S | USB Type C (DisplayPort Alternate) | 1 |
| | Headphone-out | 1 |
| | Lock type | Kensington Lock |
| | HDMI | 2 |
| | HDMI version | 2.0b |
| | HDMI HDCP version | 2.3 |
| | DisplayPort | 1 |
| | DisplayPort version | 1.4a (HBR3) |
| | DisplayPort HDCP version | 2.3 |
| Garantie | Warranty | 36M |
| Alimentation | Power Type | Internal Power Board |
| | Power Input | 100~240V, 50/60Hz |
| | On-mode Power Consumption (KWh/1000h) | TBD |
| | Annual Energy Consumption (KWh) | TBD |
| | Standby-mode Power Consumption (W) | 0.5 |
| | Off-mode Power Consumption (W) | 0.3 |
| | Energy Efficiency Rating | TBD |
| Power Cord Type | C13 | |

| | | |
|------------------------------|--|--------------------|
| Accessoires | DisplayPort Cable | 1 |
| | HDMI Cable | 0 |
| | DVI Cable | 0 |
| | USB Type A to Type B Cable | 0 |
| | USB Type C to Type A Cable | 0 |
| | USB Type C to Type C Cable | 0 |
| | Thunderbolt Cable | 0 |
| | VGA Cable | 0 |
| | 3.5mm audio Cable | 0 |
| | 3.5mm combo audio Cable | 0 |
| | 3.5mm Mic Cable | 0 |
| | Power Cord | 1 |
| | AC Adaptor | 0 |
| | Quick Guide | 1 |
| | Warranty Card | 0 |
| | Mouse Bungee Unit | 0 |
| Design | Adjustment (Tilt) | -5° ~ 20° |
| | Adjustment (Swivel) | -30° ~ 30° |
| | Adjustment (Height) | 0 ~ 130 mm |
| | Adjustment (Pivot) | -90° ~ 90° |
| | VESA Mounting | 100x100mm |
| Dimension & Weight (product) | Product Dimension with Stand (WxDxH) (mm) | TBD x TBD x TBD |
| | Product Dimension without Stand (WxDxH) (mm) | TBD x TBD x TBD |
| | Stand Dimension (WxDxH) (mm) | TBD x TBD x TBD |
| | Weight (Net kg) | TBD |
| | Weight Without Stand (kg) | TBD |
| Dimensions et poids (carton) | Inside Carton Dimension (WxDxH) (cm) | 84 x 14.8 x 47.5 |
| | Outer Carton Dimension (WxDxH) (cm) | 85.5 x 16.3 x 49.8 |
| | Weight (Gross kg) | TBD |
| Code-barre | EAN | 4711377368131 |