

PATH TO THE FUTURE


Vivez une expérience de jeu ultra-immersive avec l'écran gaming MPG 321URXW QD-OLED. Pour le plaisir des yeux, cet écran propose une dalle QD-OLED UHD 3840 x 2160 avec taux de rafraîchissement de 240 Hz et temps de réponse hyper rapide gris à gris de 0,03 ms.



Picture and logos

SELLING POINTS

- Dalle QD-OLED de troisième génération pour des images d'une qualité incroyable
- Temps de réponse gris à gris ultrarapide de seulement 0,03 ms et taux de rafraîchissement de 240 Hz
- QD Premium Color pour assurer des couleurs qui répondent aux normes du marché, avec valeur Delta E≤2
- Norme VESA DisplayHDR True Black 400 pour des visuels HDR à couper le souffle
- MSI OLED Care 2.0 pour réduire les risques de brûlures de la dalle OLED
- Mode Console avec port HDMI™ 2.1 et bande passante totale de 48 Gb/s
- Garantie OLED 3 ans contre les brûlures

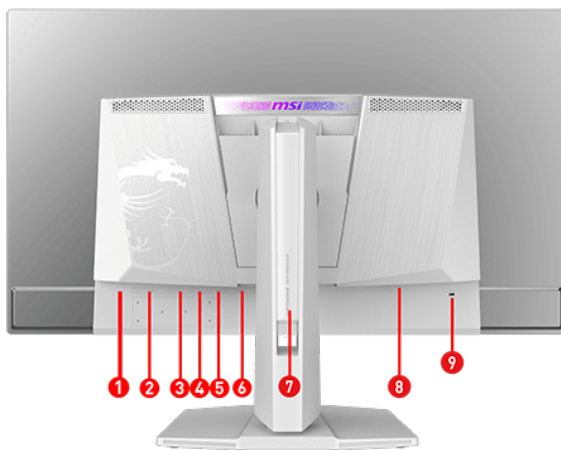

1. Sortie audio
2. 2 x HDMI™ (2.1)
3. DisplayPort (1.4a)
4. USB Type-C (Power Delivery 90 W)
5. USB 2.0 Type-B
6. 2 x USB 2.0 Type-A
7. Bouton de navigation à 5 directions
8. Entrée alimentation
9. Encoche Kensington



É C R A N S G A M I N G

MPG 321URXW QD-OLED

M P G 3 2 1 U R X W Q D - O L E D

SPECIFICATION

Modèle	Part No	9S6-3DD29A-050
	Color	ID1/White-White
Affichage	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	699.48(H) x 394.73(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	3840x2160 (UHD)
	Pixel pitch (mm)	0.1814(H)x0.1814(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	104.88~565.44 KHz(H) / 48~240.39 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	120%,93%
	NTSC (CIE1931 area percentage/overlap)	103%,91%
	sRGB (CIE1976 area percentage/overlap)	138%,100%
	sRGB (CIE1931 area percentage/overlap)	146%,100%
	Adobe RGB (CIE1976 area percentage/overlap)	118%,97%
	Adobe RGB (CIE1931 area percentage/overlap)	108%,94%
	DCI-P3 (CIE1976 area percentage/overlap)	110%,99%
	DCI-P3 (CIE1931 area percentage/overlap)	107%,98%
	Rec.709 (CIE1976 area percentage/overlap)	138%,100%
	Rec.709 (CIE1931 area percentage/overlap)	146%,100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%,80%
	Rec.2020 (CIE1931 area percentage/overlap)	77%,77%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
Ports E/S	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
	DisplayPort	1
Garantie	Warranty	36M
Alimentation	Power Type	Power Cable
	Power Input	110~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	44
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
	Power Cord Type	C13

Accessoires	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	718 x 242 x 483
	Product Dimension without Stand (WxDxH) (mm)	718 x 69 x 418
	Stand Dimension (WxDxH) (mm)	309 x 242 x 391
	Weight (Net kg)	9.6
	Weight Without Stand (kg)	6.7
Dimensions et poids (carton)	Inside Carton Dimension (WxDxH) (cm)	97.5 x 18.5 x 51.5
	Outer Carton Dimension (WxDxH) (cm)	99.5 x 19.5 x 54
	Weight (Gross kg)	12.3
Code-barre	EAN	4711377332439