

PATH TO THE FUTURE


MSI MAG 272QP QD-OLED X24 Gaming Monitor - Layar 27 inci QD-OLED menakjubkan dengan resolusi 2560 x 1440 (WQHD) dan 240Hz untuk visual ultra-halus. Sempurna bagi gamer kompetitif yang menginginkan pengalaman imersif.



Picture and logos

SELLING POINTS

- Panel MSI QD-OLED menghadirkan kualitas gambar yang memukau dengan respons super cepat.
- Waktu respons GtG tercepat 0,03 ms dengan refresh rate 240Hz.
- QD Premium Color - Menjamin akurasi warna sesuai standar industri dengan tingkat presisi tinggi (Delta E ≤ 2).
- Crystal-Clear Motion - Bersertifikasi VESA ClearMR 13000.
- MSI OLED Care 2.0 - Mengurangi risiko image sticking dan burn-in pada panel OLED.
- Console Mode - Dioptimalkan untuk kompatibilitas mulus dengan konsol gaming seperti PS5 dan Xbox Series X|S
- 3-Year Burn-In Warranty - Termasuk perlindungan terhadap OLED burn-in.

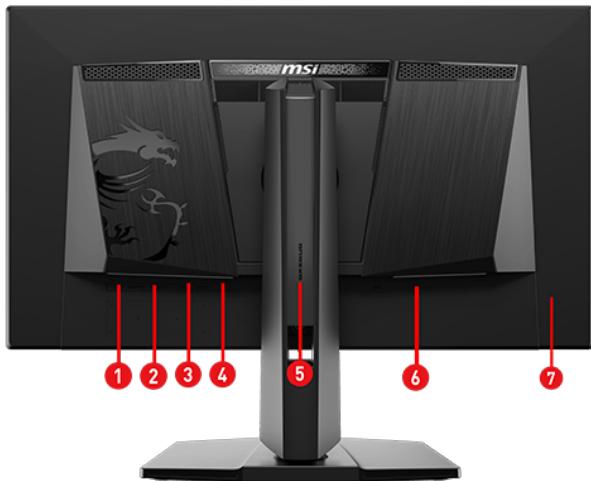

1. Headphone out
2. 2 x HDMI™ 2.1 (WQHD@240Hz)
3. DisplayPort 1.4a (HBR3)
4. Type-C (DP alt.) w/ 15W PD
5. 5-way Joystick Navigator
6. AC-in
7. Kensington lock



MONITOR

MAG 272QP QD-OLED X24

MAG 272QP QD-OLED X24

SPECIFICATION

Model	Part No	9S6-3CF89A-001
	Color	ID1/Black-Black
Display	Screen Size	26.5" (67.31 cm)
	Active Display Area (mm)	590.42(H) x 333.72(V)
	Curvature	Flat
	Panel Type	QD-OLED
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2292(H)x0.2292(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	SDR Brightness (nits)	200
	HDR Brightness (Peak nits)	400
	Contrast Ratio	1500000:1
	Signal Frequency	TBD
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	121%/95%
	NTSC (CIE1931 area percentage/overlap)	105%/92%
	SRGB (CIE1976 area percentage/overlap)	138%/100%
	SRGB (CIE1931 area percentage/overlap)	148%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	119%/98%
	Adobe RGB (CIE1931 area percentage/overlap)	109%/95%
	DCI-P3 (CIE1976 area percentage/overlap)	110%/99%
	DCI-P3 (CIE1931 area percentage/overlap)	109%/99%
	Rec.709 (CIE1976 area percentage/overlap)	138%/100%
	Rec.709 (CIE1931 area percentage/overlap)	148%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80%/80%
	Rec.2020 (CIE1931 area percentage/overlap)	78%/78%
I/O Ports	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1 (FRL 10G)
	HDMI HDCP version	2.3
	DisplayPort	1
Warranty	DisplayPort version	1.4a (HBR3)
	DisplayPort HDCP version	2.3
Power	Warranty	36M
	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	TBD
	Annual Energy Consumption (KWh)	TBD
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	TBD
	Power Cord Type	C13



MONITOR

MAG 272QP QD-OLED X24

MAG 272QP QD-OLED X24

In The Box	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
	Adjustment (Tilt)	-5° ~ 20°
Design	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
	Product Dimension with Stand (WxDxH) (mm)	N/A
Dimension & Weight (product)	Product Dimension without Stand (WxDxH) (mm)	N/A
	Stand Dimension (WxDxH) (mm)	N/A
	Weight (Net kg)	N/A
	Weight Without Stand (kg)	N/A
	Inside Carton Dimension (WxDxH) (cm)	N/A
Dimension & Weight (box)	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	N/A
	Barcode Info	EAN
		4711377379311