


Be Your Window To The World



Picture and logos

SELLING POINTS

- Ukuran layar 21,45" yang ideal untuk ruang kerja programming, coding, dan desain situs web.
- Layar bersertifikasi TÜV memastikan perlindungan dan menjaga kesehatan mata.
- Teknologi MSI EyesErgo dengan Anti-Flicker membantu mencegah ketegangan dan kelelahan mata.
- Refresh rate 100 Hz memberikan pengalaman visual yang lebih nyaman dengan flicker-free image.
- MSI Eye-Q Check membantu pengguna melakukan pemeriksaan mata secara mandiri dan mengingatkan untuk beristirahat saat menggunakan monitor dalam waktu yang lama.
- Pertahankan fleksibilitas penggunaan lintas perangkat dengan memanfaatkan berbagai sumber input, seperti port HDMI™ dan D-Sub (VGA).
- Nikmati lingkungan kerja yang lebih rapi dengan desain manajemen kabel yang praktis dan dapat dilepas.
- Desain standar VESA mountable dan slot aksesori.

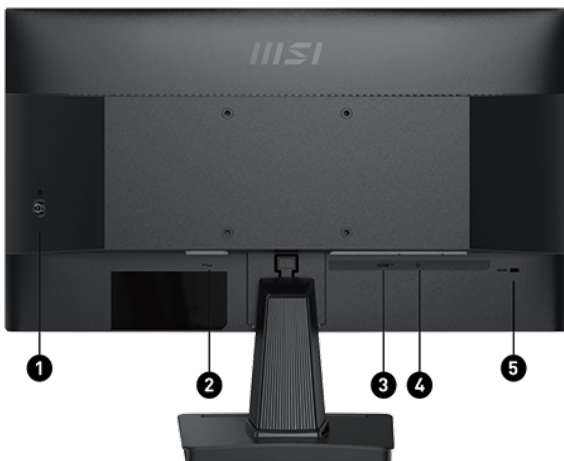

1. 1x 5-way navigator
2. 1x AC-in
3. 1x HDMI™ (1.4b)
4. 1x D-Sub (VGA)
5. 1x Kensington Lock

SPECIFICATION

Model	Entity MKT Name	PRO MP225V
	Part No	9S6-3PE0CM-018
	Color	ID1/Black-Black
Display	Screen Size	21.45" (54.48 cm)
	Active Display Area (mm)	478.656 (H) x 260.28 (V)
	Curvature	Flat
	Panel Type	VA
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.2493(H)x0.241(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~100Hz
	SDR Brightness (nits)	300
	Contrast Ratio	4000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	52.1~110 KHz(H) / 48~100 Hz(V)
	Refresh Rate	100HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	86.5%/80.71%
	NTSC (CIE1931 area percentage/overlap)	74.4%/72.47%
	sRGB (CIE1976 area percentage/overlap)	100%/94.11%
	sRGB (CIE1931 area percentage/overlap)	105%/96.11%
	Adobe RGB (CIE1976 area percentage/overlap)	85.51%/82.6%
	Adobe RGB (CIE1931 area percentage/overlap)	77%/74.89%
	DCI-P3 (CIE1976 area percentage/overlap)	77.13%/77.15%
	DCI-P3 (CIE1931 area percentage/overlap)	76.52%/76.51%
	Rec.709 (CIE1976 area percentage/overlap)	100%/94.11%
	Rec.709 (CIE1931 area percentage/overlap)	105%/96.11%
	Rec.2020 (CIE1976 area percentage/overlap)	57.25%/57.25%
	Rec.2020 (CIE1931 area percentage/overlap)	55.05%/55.05%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
I/O Ports	D-Sub	1
	Lock type	Kensington Lock
	HDMI	1
	HDMI version	1.4b
	HDMI HDCP version	1.4
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	15
	Annual Energy Consumption (KWh)	22
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E
	Power Cord Type	C13



BUSINESS PRODUCTIVITY MONITOR
PRO MP225V
PRO MP225V

In The Box	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	492.2 x 182.4 x 377.8
	Product Dimension without Stand (WxDxH) (mm)	492.2 x 51.6 x 283.1
	Stand Dimension (WxDxH) (mm)	200.4 x 182.4 x 143.8
	Weight (Net kg)	2.5
	Weight Without Stand (kg)	2.2
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	55.7 x 10.8 x 34
	Outer Carton Dimension (WxDxH) (cm)	56.7 x 11.8 x 36.5
	Weight (Gross kg)	4.3
Barcode Info	EAN	4711377319263