


Slim, Sleek, Smooth



Picture and logos

SELLING POINTS

- PerfectEdge - Desain bezel tipis di 4 sisi memungkinkan pengguna sepenuhnya tenggelam dalam pengalaman multi-layar.
- Nikmati hiburan berkualitas tinggi dengan refresh rate tinggi 120Hz yang lebih mulus.
- Layar Luas 24,5 Inci - Nikmati tampilan yang lebih lega meski dalam ruang terbatas.
- Ukuran layar terbaik untuk kantor dan meja kerja disesuaikan dengan zona kenyamanan visual pengguna.
- Layar bersertifikasi TÜV memastikan perlindungan dan menjaga kesehatan mata.
- Teknologi MSI EyesErgo dengan fitur Anti-Flicker membantu mencegah ketegangan dan kelelahan pada mata.
- MSI Eye-Q Check membantu pengguna melakukan pemeriksaan mata mandiri dan mengingatkan untuk beristirahat saat menggunakan monitor dalam waktu yang lama.
- Tetap fleksibel dengan berbagai perangkat melalui beragam sumber input, seperti port HDMI™, DisplayPort, dan D-Sub (VGA).
- Nikmati lingkungan kerja yang rapi berkat desain manajemen kabel yang praktis dan dapat dilepas.
- Desain mendukung pemasangan standar VESA dan dilengkapi slot aksesori.
- Dilengkapi dua speaker bawaan.

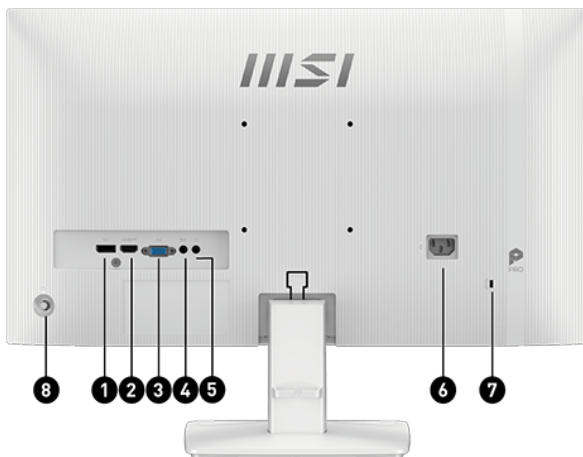

1. 1x DisplayPort 1.4a
2. 1x HDMI™ 2.0 (FHD@120Hz)
3. 1x D-Sub (VGA)
4. 1x Line-in
5. 1x Headphone-out
6. AC-in
7. 1x Kensington Lock
8. 1x 5-way Navigator

SPECIFICATION

| | | |
|-----------------|---|-------------------------------------|
| Model | Part No | 9S6-3PD4CM-023 |
| | Color | ID1/White-White |
| Display | Screen Size | 24.5" (62.2cm) |
| | Active Display Area (mm) | 543.744 x 302.616 |
| | Curvature | Flat |
| | Panel Type | IPS |
| | Resolution | 1920x1080 (FHD) |
| | Pixel pitch (mm) | 0.2832(H)x0.2802(V) |
| | Aspect Ratio | 16:9 |
| | Dynamic Refresh Rate technology | Adaptive-Sync |
| | Dynamic Refresh Rate Activated Range | 48~120Hz |
| | HDR (High dynamic range) | HDR Ready |
| | SDR Brightness (nits) | 300 |
| | Contrast Ratio | 1500:1 |
| | DCR (Dynamic Contrast Ratio) | 10000000:1 |
| | Signal Frequency | 52.704~132.12 KHz(H) / 48~120 Hz(V) |
| | Refresh Rate | 120Hz |
| | Response Time (MPRT) | 1ms(MPRT) |
| | Response Time (GTG) | 4ms |
| | View Angles | 178°(H)/178°(V) |
| | NTSC (CIE1976 area percentage/overlap) | 87%/79% |
| | NTSC (CIE1931 area percentage/overlap) | 73%/71% |
| | sRGB (CIE1976 area percentage/overlap) | 99%/95% |
| | sRGB (CIE1931 area percentage/overlap) | 105%/96% |
| | Adobe RGB (CIE1976 area percentage/overlap) | 85%/83% |
| | Adobe RGB (CIE1931 area percentage/overlap) | 77%/74% |
| | DCI-P3 (CIE1976 area percentage/overlap) | 79%/79% |
| | DCI-P3 (CIE1931 area percentage/overlap) | 77%/74% |
| | Rec.709 (CIE1976 area percentage/overlap) | 99%/95% |
| | Rec.709 (CIE1931 area percentage/overlap) | 105%/96% |
| | Rec.2020 (CIE1976 area percentage/overlap) | 57%/57% |
| | Rec.2020 (CIE1931 area percentage/overlap) | 54%/54% |
| | Surface Treatment | Anti-glare |
| | Display Colors | 16.7M |
| | Color bit | 8 bits (6 bits + FRC) |
| I/O Ports | D-Sub | 1 |
| | Line-in | 1 |
| | Headphone-out | 1 |
| | Card reader | N/A |
| | Lock type | Kensington Lock |
| | Speaker | 2x 2W |
| | HDMI | 1 |
| | HDMI version | 2.0 |
| | HDMI HDCP version | 1.4 |
| | DisplayPort | 1 |
| | DisplayPort version | 1.4a |
| | DisplayPort HDCP version | 1.3 |
| | Warranty | Warranty |
| Power | Power Type | Power Cable |
| | Power Input | 100~240V, 50/60Hz |
| | On-mode Power Consumption (KWh/1000h) | 18 |
| | Annual Energy Consumption (KWh) | 26 |
| | Standby-mode Power Consumption (W) | 0.5 |
| | Off-mode Power Consumption (W) | 0.3 |
| | Energy Efficiency Rating | E |
| Power Cord Type | C13 | |

| | | |
|------------------------------|--|-------------------------|
| In The Box | DisplayPort Cable | 0 |
| | HDMI Cable | 1 |
| | DVI Cable | 0 |
| | USB Type A to Type B Cable | 0 |
| | USB Type C to Type A Cable | 0 |
| | USB Type C to Type C Cable | 0 |
| | Thunderbolt Cable | 0 |
| | VGA Cable | 0 |
| | 3.5mm audio Cable | 0 |
| | 3.5mm combo audio Cable | 0 |
| | 3.5mm Mic Cable | 0 |
| | Power Cord | 1 |
| | AC Adaptor | 0 |
| | Quick Guide | 1 |
| | Warranty Card | 0 |
| Mouse Bungee Unit | 0 | |
| Design | Adjustment (Tilt) | -5° ~ 20° |
| | VESA Mounting | 100x100mm |
| Dimension & Weight (product) | Product Dimension with Stand (WxDxH) (mm) | 556.89 x 188.2 x 413.91 |
| | Product Dimension without Stand (WxDxH) (mm) | 556.89 x 42.94 x 321.49 |
| | Stand Dimension (WxDxH) (mm) | 218.84 x 188.2 x 146.22 |
| | Weight (Net kg) | 3. |
| | Weight Without Stand (kg) | 2.66 |
| Dimension & Weight (box) | Inside Carton Dimension (WxDxH) (cm) | 63 x 14.2 x 41.1 |
| | Outer Carton Dimension (WxDxH) (cm) | 64.8 x 16 x 44.3 |
| | Weight (Gross kg) | 5.1 |
| Barcode Info | EAN | 4711377271875 |