

Create Splendid Moments

Creator P50 is the best designer's desktop PC. With a compact dimension, it fits all of your studios to make your great ideas come true; Creator P50 is designed for multi-tasking & pro-level creators to work with a workflow acceleration.




Picture and logos

SELLING POINTS

Creator P50 11th

- Windows 10 Home- MSI recommends Windows 11 Pro for businessFREE Upgrade to Windows 11*
- Up to the 11th generation Intel® Core™ i7 processors
- The latest MSI GeForce® RTX Graphics Card
- Dual Channel Memory with DDR4 Boost Technology provides the most smooth & fastest real-time previews
- Thunderbolt 4 (Optional) delivers the fastest, most versatile connection to any dock, display, or data device & NAS
- Connect and rapidly transfer data over a network with the high-bandwidth and low-latency 2.5G Ethernet LAN.
- Wi-Fi 6E puts more emphasis on transmission security with speed up to 2.4Gbps
- Support 5K2K Creating Experience
- Exclusive Software - MSI Center & Creator OSD
- 4.72 liters in size, the most compact desktop PC for creators

*Upgrade timing may vary by device. Features and app availability may vary by region. Certain features require specific hardware (see <https://www.microsoft.com/en-us/windows/windows-11-specifications>).

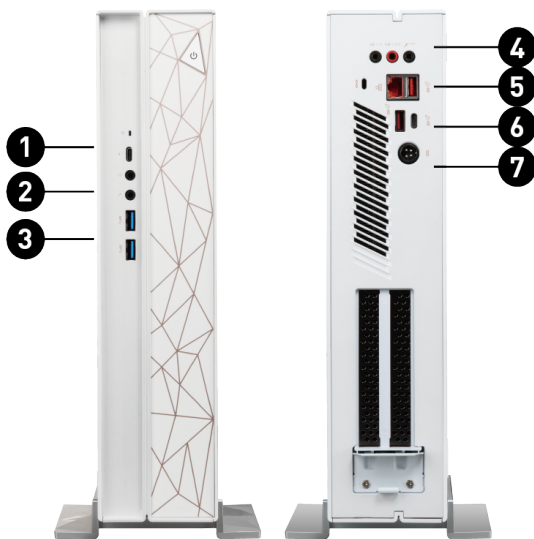

1. 1x Thunderbolt 4 (Optional)
2. 1x Headphone-out / 1x Mic-in
3. 2x USB 3.2 Gen 1 Type A
4. 3x Audio Jacks
5. 1x USB 3.2 Gen 2 Type-A / 1x RJ45 (2.5G) / 1x Kensington Lock
6. 1x USB 3.2 Gen 2x2 Type-C / 1x USB 3.2 Gen 2 Type-A
7. 1x DC in

SPECIFICATION

| | | |
|-------------------|-------------------------------------|-------------------------------|
| Model | Part No | 9S6-B93712-085 |
| | MKT Name | Creator P50 11TC |
| | MKT Spec | Creator P50 11TC-057IN |
| | Color | ID1/White-White-White |
| Operating Systems | Windows | Windows 11 Home |
| Processor | CPU model | Intel Core i5-11400 |
| | CPU Clock | 2.6GHz |
| | CPU Cores | 6 |
| | CPU TDP | 65W |
| | CPU Cache | 12 MB Intel® Smart Cache |
| | CPU Threads | 12 |
| | CPU Cooling | Air cooling |
| Chipset | Motherboard Chipset | B560 |
| Discrete Graphics | VGA I/O Port | HDMI,DPx3,EP8 |
| | Graphics Card | GeForce RTX 3060 AERO ITX 12G |
| | Graphics Card VRAM | 12G |
| Memory | Memory Capacity | 16GB(8GB*2) |
| | Memory Type | DDR4 SDRAM |
| | Memory Speed | 1600(3200)MHz |
| | Memory Module Form Factor | SO-DIMM |
| | Memory Slot (Total/Free) | 2/0 |
| | Memory Max Capacity | Max 64GB |
| Storage | Total SSD Storage Capacity | 512GB |
| | Total HDD Storage Capacity | 1TB*1 |
| | M.2 Slot (1) Installed SSD | 512GB*1 |
| | M.2 Slot (1) Interface | PCIe GEN3x4 w/o DRAM NVMe |
| | M.2 Slot (1) Form Factor | M.2-2280 M-KEY |
| | M.2 slots (Total/Free) | 1/0 |
| | HDD (1) RPM | 7200RPM |
| | HDD (1) Form Factor | 2.5 inch 7mm |
| | HDD (1) Interface | SATA GEN3 |
| | 3.5" Drive Bays (Total/Free) | 0/ |
| | 2.5" Drive Bays (Total/Free) | 1/0 |
| | ODD(Type) | N/A |
| | ODD Height | N/A |
| ODD Type | N/A | |
| Communications | LAN Controller | Intel I225-V |
| | Wireless LAN Controller | INTEL/AX210.NG.WG.NV |
| | Wireless LAN standard | 802.11a/b/g/n/ac/ax 2x2+BT |
| | Bluetooth Version | 5.2 |
| Audio | Audio Codec | Realtek ALC1220P |
| | Audio Support | 5.1 Channel HD Audio |
| I/O Ports (Front) | Thunderbolt | Optional |
| | USB 5Gbps (USB 3.2 Gen 1 Type-A) | 2 |
| | Audio Mic-In (Front) | 1 |
| | Audio-Out (Front) | 1 |
| I/O Ports (Rear) | USB 20Gbps (USB 3.2 Gen 2x2 Type-C) | 1 |
| | USB 10Gbps (USB 3.2 Gen 2 Type-A) | 2 |
| | LAN Ports (RJ45) | 1 |
| | Audio Jack Total (Rear) | 3 |
| Power | Rated Wattage | 330W |
| | Efficiency Rating | N/A |
| | Form factor | N/A |
| | Power Supply Type | ADAPTOR |

| | | |
|-----------------------|-------------------------------------------------|-----------------------------------------------------------------|
| In The Box | Keyboard Interface | N/A |
| | Mouse Interface | N/A |
| | Power Cord | 1 |
| | AC Adaptor | 1 |
| | Warranty Card | 1 |
| | Quick Guide | 3 |
| | User Manual | N/A |
| | VESA Mount kit | N/A |
| | Keyboard | N/A |
| | Mouse | N/A |
| Regulatory Compliance | Storage Operating Temperature Range | 0° C ~ 35° C ; -20° C ~ 60° C |
| | Storage Operating Humidity Range | 0% ~ 85%;0% ~ 90% |
| | Certifications | FCC(Class B) CB/CE UL(CUL) BSMI VCCI RCM(C-Tick) |
| Dimension & Weight | Product Dimensions (WxDxH) (mm) | N/A |
| | Product Dimensions (WxDxH) (inch) | N/A |
| | Inside Carton Dimensions (WxDxH) (mm) | N/A |
| | Inside Carton Dimensions (WxDxH) (inch) | N/A |
| | Outer Carton Dimensions Standard (WxDxH) (mm) | 449 x 174 x 304 |
| | Outer Carton Dimensions Standard (WxDxH) (inch) | 17.68 x 6.85 x 11.97 |
| | Weight (Net kg) | 3.4 |
| | Weight (Gross kg) | 6.6 |
| Warranty | Product Volume (Liters) | 4.72 |
| | Warranty | 24months |