


## PATH TO THE FUTURE



Picture and logos

## SELLING POINTS

- Windows 10 Home - MSI raccomanda Windows 10 Pro per il business
- Intel® Celeron® 5205U / Intel® Pentium®Gold 6405U Processor
- 15.6" Pannello LCD Retroilluminato (1366\*768 ) / Single Touch (PRO 16T 10M)
- Fan-less Design
- HDD Caddy support 2.5" storage
- Anti-Glare Display
- COM Port x 2 / RJ-45 LAN x 2 / USB 3.2 Gen 1 x 4 / USB2.0 x 2 / VGA-out x 1 / Printer Port x 1

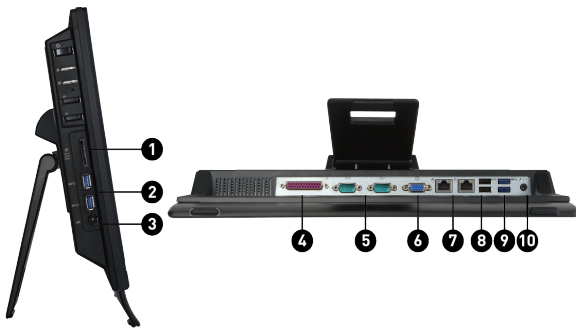

1. 1x Card Reader
2. 2x USB 3.2 Gen 1 Type A
3. 1x DC-in
4. 1x Parallel Port (Printer Port)
5. 2x COM port
6. 1x VGA-out
7. 2x RJ45
8. 2x USB 2.0 Type A
9. 2x USB 3.2 Gen 1 Type A
10. 1x Line-out/Microphone-in

**SPECIFICATION**

Model	MKT Name	PRO 16T 10M
	MKT Spec	PRO 16T 10M-002XEU
	Color	ID1/White-White-White
Barcode Info	EAN	4719072701659
Operating Systems	Operating Systems	N/A
Processor	CPU Number	Intel Celeron 5205U
	CPU Clock	1.9GHz
	CPU Cores	2
	Cache	2MB
	Threads	2
Chipset	Chipsets	N/A
Memory	Memory Size	4GB(4GB*1)
	Memory Type	DDR4 SDRAM
	Memory Speed	1333(2666)MHz
	Module Type	SO-DIMM
	Memory Slot (Total/Free)	2/1
	Max Capacity	Max 32GB
Audio	Audio Chipset	Realtek ALC233
	Audio Type	7.1 Channel HD Audio
Communications	LAN	Realtek RTL8111H
	WLAN	INTEL/9462.NG.WG.NV
	WLAN Version	802.11ac 1x1+BT
	BT Version	5
Storage	SSD Size	256GB
	HDD1 Size	N/A
	SSD Config	256GB*1
	SSD Interface	PCIe GEN3x4 NVMe
	SSD Form Factor	M.2-2280 M-KEY
	M.2 slots (Total/Free)	1/0
	HDD1 RPM	N/A
	HDD1 Form Factor	N/A
	HDD1 Interface	N/A
	3.5" Drive Bays (Total/Free)	0/
	2.5" Drive Bays (Total/Free)	1/1
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
I/O Ports	Lock type	Kensington
Input Device	WebCam	1M
Design	Adjustment (Tilt)	N/A
	Adjustment (Swivel)	N/A
	Adjustment (Height)	N/A
	Adjustment (Pivot)	N/A
I/O Ports (Front)	USB 3.2 Gen 1 Type A	2
In The Box	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	3
	User Manual	N/A
	VESA Mount kit	N/A
	Keyboard	SK9626MW
	Mouse	SM9023MW
I/O Ports (Rear)	USB 3.2 Gen 1 Type A (R)	2
	USB 2.0 Type A (R)	2
	RJ45	2
	Card Reader	1
	VGA out	1
	COM Port	2
	Mic-in/Headphone-out combo (R)	1
Printer Port (Parallel)	1	

Power	AC Adapter Output	65W
	Battery	N/A
	Battery Whrs	N/A
Warranty	Warranty	24M
Dimension & Weight	Weight (Net kg)	N/A
	Weight (Gross kg)	N/A
	Product Dimension with Holder (WxDxH) (mm)	399.5 x 69.2 x 313.9
	Product Dimension with Holder (WxDxH) (inch)	15.73 x 2.72 x 12.36
	Inside Carton Dimension with Holder (WxDxH) (mm)	N/A
	Inside Carton Dimension with Holder (WxDxH) (inch)	N/A
	Inside Carton Dimension with Stand (WxDxH) (mm)	N/A
	Inside Carton Dimension with Stand (WxDxH) (inch)	N/A
	Outer Carton Dimension with Holder (WxDxH) (mm)	528 x 183 x 393
Regulatory Compliance	Operating, Storage Temperature	0° C ~ 35° C ; -20° C ~ 60° C
	Operating, Storage Humidity	0% ~ 85%;0% ~ 90%
	Regulatory Compliance	FCC(Class B) CB/CE UL(CUL) BSMI VCCI RCM(C-Tick)
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	N/A
	Product Dimension with Stand (WxDxH) (inch)	N/A