


Be Your Window To The World



Picture and logos

SELLING POINTS

- Windows 11 Home - MSI consiglia Windows 11 Pro per uso aziendale
- Processore Intel® Alder Lake N100 / N200 con memoria DDR4
- Lo schermo antiriflesso da 15,6" dotato di un pannello tattile resistivo singolo è una soluzione eccellente per i terminali POS in negozio
- Design senza ventole e dTPM 2.0 garantiscono la sicurezza dei dati confidenziali
- Due porte COM, 6 porte USB e una porta per stampante (porta parallela) per scanner barcode, lettore di carte di credito, stampante, cassa automatica, ecc.
- Espansione a un secondo monitor con uscita D-sub (VGA)
- Il design Dual LAN fornisce un backup di rete e un ambiente di rete più sicuro
- Design montabile su VESA, lettore di schede integrato e alloggiamento per HDD da 2,5" offrono una soluzione di manutenzione senza problemi per le aziende.

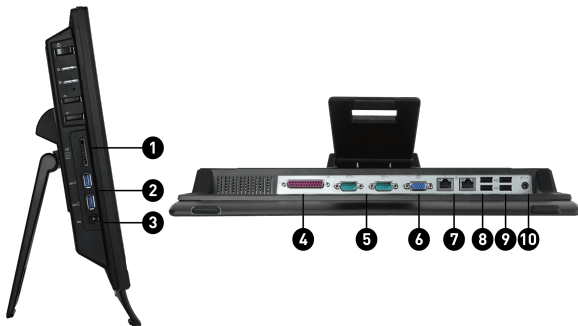

1. 1x Card reader
2. 2 x USB 3.2 Gen 2 Type A
3. 1x DC-in
4. 1 x Parallel Port (Printer Port)
5. 2 x Serial Port (COM Port)
6. 1 x VGA Port
7. 2 x RJ-45 LAN
8. 2 x USB 2.0 Type A
9. 2 x USB 2.0 Type A
10. 1 x Line-out/Microphone-in



ALL-IN-ONE PCS
PRO AP162T ADL
PRO AP162T ADL-005IT

SPECIFICATION

Operating Systems	Operating Systems	Windows 11 Pro
Model	Part No	9S6-A60211-046
	MKT Name	PRO AP162T ADL
	MKT Spec	PRO AP162T ADL-005IT
	Color	ID1/Black-Black-Black
	SKU Number	00-A60211-015
Chipset	Chipsets	SoC
Memory	Memory Size	4GB(4GB*1)
	Memory Type	DDR4 SDRAM
	Memory Speed	1600(3200)MHz
	Module Type	SO-DIMM
	Memory Slot(Total)	1
	Memory Slot(Free)	0
	Max Capacity	Max 16GB
Processor	CPU Number	Intel Processor N100
	CPU Clock	0.8GHz
	CPU Cores	4
	TDP	6W
	Max Turbo Frequency	up to 3.40 GHz
	Cache	6 MB
	Threads	4
Display	View Angles	178°(H)/178°(V)
	Touch Screen	Single Point Resistive Touch Screen
	Screen Size	15.6" (40 cm)
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Brightness (nits)	250
	Contrast Ratio	1000:1
	Refresh Rate	60Hz
	Response Time (GTG)	25ms Typ
Discrete Graphics	GPU1 Vendor	N/A
	GPU1 MKT Name	N/A
	GPU1 Number	UMA
	GPU1 VRAM Size	N/A
	GPU1 VRAM Type	N/A
Audio	Audio Chipset	Realtek ALC256
	Audio Type	2.1 Channel HD Audio
Storage	SSD Interface	PCIe GEN3x4
	SSD Form Factor	M.2-2280 M-KEY
	SSD Config	128GB*1
	SSD Size	128GB
	HDD1 Interface	N/A
	HDD1 Form Factor	N/A
	HDD1 Size	N/A
	HDD1 RPM	N/A
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
	M.2 slots(Total)	1
	M.2 slots(Free)	0
	2.5" Drive Bays(Total)	1
	2.5" Drive Bays (Free)	1
	3.5" Drive Bays(Free)	0
Communications	LAN	Realtek RTL8111H
	WLAN Version	Wi-Fi 5+BT
	BT Version	5
Input Device	Webcam	internal webcam
	Webcam Resolution	1.0MP (720P)
	Webcam supports Windows Hello or not	No



ALL-IN-ONE PCS
PRO AP162T ADL
PRO AP162T ADL-005IT

I/O Ports (Side)	Type-C in	N/A
	Card Reader	1
	Thunderbolt	N/A
	USB 3.2 Gen 2 (10G) Type A	2
I/O Ports (Rear)	USB 2.0 Type A (R)	4
	RJ45	2
	VGA out	1
	COM Port	2
	Mic-in/Headphone-out combo (R)	1
	Printer Port (Parallel)	1
	Lock type	Kensington
Warranty	Warranty	N/A
Dimension & Weight	Product Dimension with Holder (WxDxH) (mm)	399.5 x 69.2 x 313.9
	Product Dimension with Holder (WxDxH) (inch)	15.73 x 2.72 x 12.36
	Product Dimension with Stand (WxDxH) (mm)	N/A
	Product Dimension with Stand (WxDxH) (inch)	N/A
	Outer Carton Dimension with Holder (WxDxH) (mm)	574 Wireless KB.MS / 534 Wired KB.MS x 189 Wireless KB.MS / 189 Wired KB.MS x 405 Wireless KB.MS / 405 Wireless KB.MS
	Outer Carton Dimension with Holder (WxDxH) (inch)	574 Wireless KB.MS / 534 Wired KB.MS x 189 Wireless KB.MS / 189 Wired KB.MS x 405 Wireless KB.MS / 405 Wireless KB.MS
	Outer Carton Dimension with Stand (WxDxH) (mm)	N/A
	Outer Carton Dimension with Stand (WxDxH) (inch)	N/A
	Weight (Net kg)	3.962
	Weight (Net lbs)	8.73
	Weight (Gross kg)	5.369
	Weight (Gross lbs)	11.84
Power	AC Adapter Output	65W
VESA	VESA size	100 x 100 mm
Regulatory Compliance	Regulatory Compliance	FCC(Class B), CB/CE, UL(CUL), BSMI, VCCI, RCM(C-Tick)
In The Box	AC Adaptor	1
	Power Cord	1
	Warranty Card	1
	Quick Guide	3
	User Manual	N/A
	VESA Mount kit	N/A
	Keyboard	SG761412IA
	Keyboard Interface	USB
	Mouse	SM9023M
	Mouse Interface	USB
Barcode Info	EAN	4711377162128