


WIN THE COMPETITION



Picture and logos

SELLING POINTS

- Supports AMD Ryzen™ 9000 / 8000 / 7000 Series Desktop Processors
- Supports DDR5 Memory, Dual Channel DDR5 8200+ MT/s (OC)
- Ultra Performance: 10+2+1 Duet Rail Power System with P-PAK, dual 8-pin CPU power connectors, Core Boost, Memory Boost, 6-layer PCB made by 2oz thickened copper PCB
- Frozr Guard: Extended Heatsink, MOSFET thermal pads rated for 7W/mK, additional choke thermal pads and M.2 Shield Frozr are built for high performance system and non-stop experience
- High-speed Connectivity: 2.5G LAN with Wi-Fi 6E Solution - The premium solution for professional and multimedia use, delivering secure, stable, and high-speed networking and data transmission
- Lightning Fast Game experience: PCIe 4.0 slot, Lightning Gen 5 x4 M.2, Front USB Type-C
- EZ DIY: EZ M.2 Clip II, EZ-Conn Design and EZ Antenna
- Audio Boost: Reward your ears with studio grade sound quality for the most immersive gaming experience

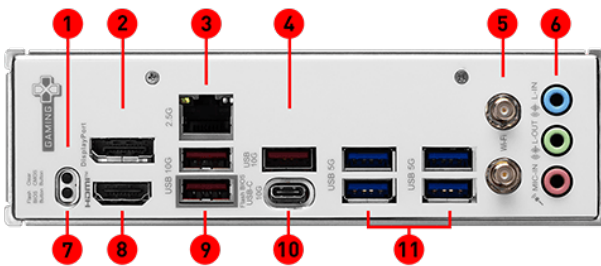

1. Clear CMOS Button
2. DisplayPort 1.4
3. 2.5G LAN
4. USB 10Gbps (Type-A)
5. Wi-Fi / Bluetooth
6. HD Audio Connectors
7. Flash BIOS Button
8. HDMI™ 2.1 Port
9. USB 10Gbps (Type-A)
10. USB 10Gbps (Type-C)
11. USB 5Gbps (Type-A)

SPECIFICATION

Chipset	Platform	AMD
	Chipset Marketing Name	B850
CPU SUPPORT	CPU Support	Supports AMD Ryzen™ 9000/ 8000/ 7000 Series Desktop Processors
	Socket	Socket AM5
Memory	Memory Qty	4
	Memory Type	DDR5 UDIMM
Onboard Graphics	HDMI™	1
	DVI	N/A
	D-Sub	N/A
	Onboard Graphics note	*Available only on processors featuring integrated graphics. Graphics specifications may vary depending on the CPU installed.
EXPANSION SLOT	PCI-E x16 slot (Qty)	1
	PCI-E x1 slot (Qty)	2
	PCI slot (Qty)	N/A
	PCI_E1 Gen	PCIe 3.0
	PCI_E1 bandwidth	x1
	PCI_E2 Gen	PCIe 4.0
	PCI_E2 bandwidth	x16
	PCI_E3 Gen	PCIe 3.0
	PCI_E3 bandwidth	x1
	PCI_E4 Gen	N/A
	PCI_E4 bandwidth	N/A
	PCI_E5 Gen	N/A
	PCI_E5 bandwidth	N/A
	PCI_E6 Gen	N/A
PCI_E6 bandwidth	N/A	
Storage	PCI_E7 Gen	N/A
	PCI_E7 bandwidth	N/A
	U.2 (Qty)	N/A
	M.2 (Qty)	2
	M.2_1 (Gen3/Gen4/Gen5)	PCIe 5.0 x4
	M.2_1 (SATA mode)	N/A
	M.2_2 (Gen3/Gen4/Gen5)	PCIe 4.0 x4
	M.2_2 (SATA mode)	N/A
	M.2_3 (Gen3/Gen4/Gen5)	N/A
	M.2_3 (SATA mode)	N/A
	M.2_4 (Gen3/Gen4/Gen5)	N/A
	M.2_4 (SATA mode)	N/A
	M.2_5 (Gen3/Gen4/Gen5)	N/A
	M.2_5 (SATA mode)	N/A
	M.2_6 (Gen3/Gen4/Gen5)	N/A
	M.2_6 (SATA mode)	N/A
	M.2_7 (Gen3/Gen4/Gen5)	N/A
M.2_7 (SATA mode)	N/A	
SATA 6G (Qty)	4	
Multi-GPU	Supports NVIDIA® SLI™ Technology	N/A
	AMD MULTI-GPU Support	N/A
LAN	LAN Chip	Realtek® 8125D 2.5G LAN
WIRELESS / BLUETOOTH	Wi-Fi Module	Wi-Fi 6E Solution
	Bluetooth SPEC	Supports Bluetooth® 5.3, FIPS, FISMA
BACK PANEL PORTS	I/O Description	<ul style="list-style-type: none"> 1. Clear CMOS Button 2. DisplayPort 1.4 3. 2.5G LAN 4. USB 10Gbps (Type-A) 5. Wi-Fi / Bluetooth 6. HD Audio Connectors 7. Flash BIOS Button 8. HDMI™ 9. USB 10Gbps (Type-A) 10. USB 10Gbps (Type-C) 11. USB 5Gbps (Type-A)
PCB Dimension (W × L)	PCB Form Factor	mATX