


PATH TO THE FUTURE

Introducing the MSI MAG 274CQF esports gaming monitor. This cutting-edge monitor features a 27-inch WQHD display with a lightning-fast 180Hz refresh rate and a rapid 0.5ms (GtG, Min.) response time. With the MAG 274CQF, you will have the competitive advantage needed to outperform and defeat your opponents in gaming battles.

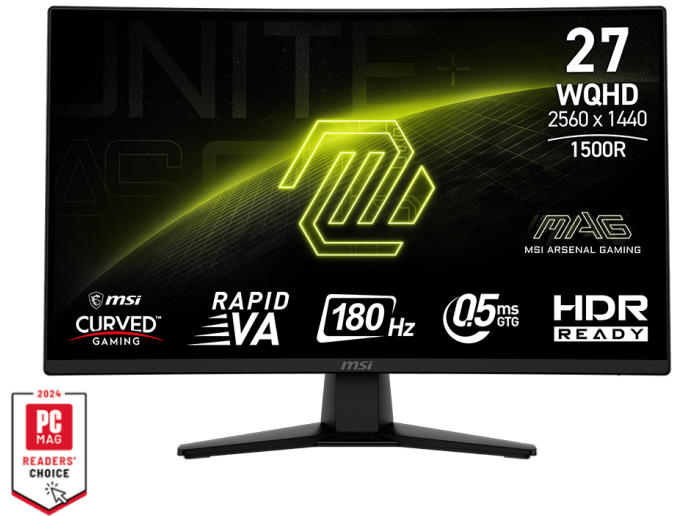

Picture and logos

SELLING POINTS

- Pannello Rapid VA - Offre un tempo di risposta di 0,5 ms (GtG, Min.), ottimizza i colori e la luminosità dello schermo.
- Refresh Rate a 180Hz - Rispondi più velocemente con immagini più fluide.
- Tempo di risposta di 0,5 ms (GtG, Min.) - Elimina tearing e fotogrammi a scatti.
- AI Vision - La nuova tecnologia AI Vision non solo rivela i dettagli nelle aree scure, ma aumenta anche la luminosità complessiva e satura i colori.
- Less Blue Light - Soluzione software per ridurre l'emissione di luce nella regione blu-viola dello spettro della luce blu.



1. 5-way Joystick Navigator
2. DC-in
3. Display Port 1.4a
4. 2x HDMI™ 2.0b(WQHD@144Hz)
5. Earphone out
6. Kensington Lock

SPECIFICATION

Model	Part No	9S6-3CE31T-020
	Color	ID1/Black-Black
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Curve 1500R
	Panel Type	Rapid VA
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~180Hz (V)
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	5000:1
	DCR (Dynamic Contrast Ratio)	10000000:1
	Signal Frequency	71.04~266.4 KHz(H) / 48~180 Hz(V)
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	0.5ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	111%/84%
	NTSC (CIE1931 area percentage/overlap)	88%/79%
	sRGB (CIE1976 area percentage/overlap)	128%/99%
	sRGB (CIE1931 area percentage/overlap)	125%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	109%/89%
	Adobe RGB (CIE1931 area percentage/overlap)	92%/84%
	DCI-P3 (CIE1976 area percentage/overlap)	102%/93%
	DCI-P3 (CIE1931 area percentage/overlap)	92%/89%
	Rec.709 (CIE1976 area percentage/overlap)	128%/99%
	Rec.709 (CIE1931 area percentage/overlap)	125%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	74%/72%
	Rec.2020 (CIE1931 area percentage/overlap)	66%/66%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)	
I/O Ports	Headphone-out	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	External Adaptor 20V 2.25A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	25
	Annual Energy Consumption (KWh)	29
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
Power Cord Type	C5	

In The Box	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	614 x 250 x 438
	Product Dimension without Stand (WxDxH) (mm)	614 x 77 x 364
	Stand Dimension (WxDxH) (mm)	340 x 250 x 140
	Weight (Net kg)	3.4
	Weight Without Stand (kg)	3.0
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	75 x 15 x 48.8
	Outer Carton Dimension (WxDxH) (cm)	76.5 x 16.5 x 51.5
	Weight (Gross kg)	6.1
Barcode Info	EAN	4711377331609