


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Pannello QD-OLED di prossima generazione: con qualità dell'immagine sorprendente e tempi di risposta veloci.
- Tempo di risposta GtG più veloce di 0,03 ms e frequenza di aggiornamento di 175 Hz.
- Colori Premium QD: assicura che il colore soddisfi lo standard di mercato - Delta E ≤ 2.
- Incredibile visualizzazione HDR - VESA DisplayHDR True Black 400.
- App di intelligenza per il gioco: crea le impostazioni di visualizzazione perfette per i tuoi giochi.
- MSI OLED Care 2.0: riduce il rischio di immagini OLED persistenti o burn-in.
- KVM: controlla più dispositivi con una sola tastiera, un mouse e un monitor.
- Modalità Console: fornisce HDMI™ 2.1 con una larghezza di banda completa di 48 Gbps.
- Garanzia 3 anni Anti Burn-in - Una garanzia specifica della durata di ben tre anni sui monitor OLED MSI.

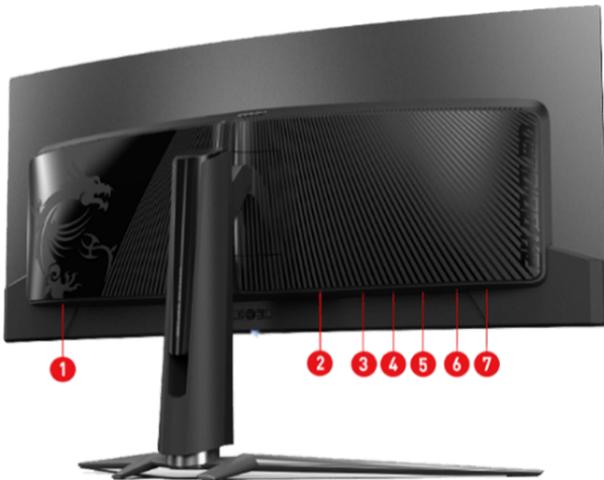

1. AC jack
2. 2 x HDMITM (2.1)
3. 1 x DP (1.4a)
4. 1 x USB Type-C (15W)
5. 2 x USB 2.0 Type A
6. 1 x USB Type B
7. 1 x Headphone

SPECIFICATION

Model	Part No	9S6-3DD04T-042
	Color	ID1/Black-Black
Display	Screen Size	34.18" (86.82 cm)
	Active Display Area (mm)	800.1(H) x 337.1(V)
	Curvature	Curve 1800R
	Panel Type	QD-OLED
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.2315(H)x0.2315(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	FreeSync Premium Pro
	Dynamic Refresh Rate Activated Range	48~175Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	31~274 KHz(H) / 48~175 Hz(V)
	Refresh Rate	175Hz
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	121.3%/94.2%
	NTSC (CIE1931 area percentage/overlap)	105.4%/92.3%
	sRGB (CIE1976 area percentage/overlap)	139.1%/100 %
	sRGB (CIE1931 area percentage/overlap)	148.8%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	119.2%/97.8%
	Adobe RGB (CIE1931 area percentage/overlap)	110.3%/94.6%
	DCI-P3 (CIE1976 area percentage/overlap)	110.8%/99.3%
	DCI-P3 (CIE1931 area percentage/overlap)	109.7%/99.1%
	Rec.709 (CIE1976 area percentage/overlap)	139.1%/100%
	Rec.709 (CIE1931 area percentage/overlap)	148.8%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80.7%/80.7%
	Rec.2020 (CIE1931 area percentage/overlap)	78.7%/78.7%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
	I/O Ports	USB Type C (DisplayPort Alternate)
Headphone-out		1
USB 2.0 Type A		2
USB 2.0 Type B		1
Lock type		Kensington Lock
HDMI		2
HDMI version		2.1
HDMI HDCP version		2.3
DisplayPort		1
DisplayPort version		1.4a
DisplayPort HDCP version		2.3
Warranty	Warranty	36M
Power	Power Type	Power Cable
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	50
	Annual Energy Consumption (KWh)	N/A
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
	Power Cord Type	C13



MONITOR

MAG 341CQP QD-OLED

MAG 341CQPA QD-OLED

In The Box	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 100 mm
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	812 x 318 x 427
	Product Dimension without Stand (WxDxH) (mm)	812 x 130 x 361
	Stand Dimension (WxDxH) (mm)	633 x 318 x 371
	Weight (Net kg)	8.8
	Weight Without Stand (kg)	6.67
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	100 x 23.3 x 51.3
	Outer Carton Dimension (WxDxH) (cm)	101.5 x 24.8 x 53.6
	Weight (Gross kg)	12.45
Barcode Info	EAN	4711377389556