


Business & Productivity Monitor



Picture and logos

SELLING POINTS

- Webcam FHD integrata con microfono digitale e copertura per webcam.
- Il display certificato TÜV garantisce la protezione e la salute della vista.
- La tecnologia MSI EyesErgo con tecnologia Anti-Flicker aiuta a prevenire l'affaticamento e l'affaticamento degli occhi.
- Il refresh rate di 120 Hz offre un'esperienza visiva migliore con immagini prive di sfarfallio.
- MSI Eye-Q Check aiuta ad effettuare un auto-controllo della vista e ricorda di fare pause durante l'uso prolungato del monitor.
- Il supporto è progettato con funzionalità ergonomiche, tra cui inclinazione, rotazione, regolazione dell'altezza e orientamento pivot.
- Un supporto regolabile con design montabile per mini-PC offre una configurazione più ergonomica e ordinata, migliorando il comfort e l'organizzazione dell'utente.
- Montaggio standard VESA e design con slot per accessori.
- Due altoparlanti integrati.

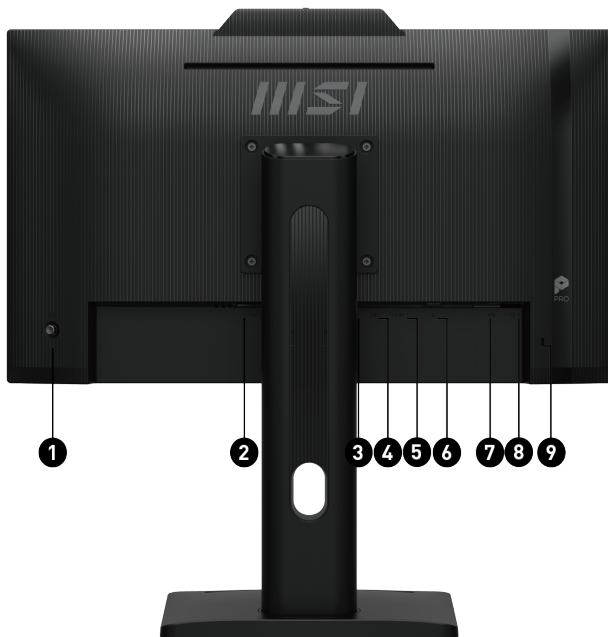

1. 5-way Navigator
2. AC-in
3. 1x Headphone-out
4. 1x DisplayPort 1.2a
5. 1x HDMI™ 1.4b (FHD@120Hz)
6. 1x D-Sub (VGA)
7. 2x USB 2.0 Type-A
8. 1x USB 2.0 Type-B
9. Kensington Lock



PRO MP242PMG

PRO MP242PMG

SPECIFICATION

Model	SKU Number	9S6-3PD89T-001
	Entity MKT Name	PRO MP242PMG
	Part No	9S6-3PD89T-001
	Color	ID1/Black-Black
Display	Screen Size	23.8" (60cm)
	Active Display Area (mm)	527.04(H) x 296.46(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch (mm)	0.2745(H)x0.2745(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~120Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	1500:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	47.11~144.23 KHz(H) / 48~120 Hz(V)
	Refresh Rate	120Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	100%/80%
	NTSC (CIE1931 area percentage/overlap)	79%/72%
	sRGB (CIE1976 area percentage/overlap)	115%/99%
	sRGB (CIE1931 area percentage/overlap)	111%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	98%/86%
	Adobe RGB (CIE1931 area percentage/overlap)	82%/77%
	DCI-P3 (CIE1976 area percentage/overlap)	91%/89%
	DCI-P3 (CIE1931 area percentage/overlap)	82%/81%
	Rec.709 (CIE1976 area percentage/overlap)	115%/99%
	Rec.709 (CIE1931 area percentage/overlap)	111%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	67%/67%
	Rec.2020 (CIE1931 area percentage/overlap)	59%/59%
	Surface Treatment	Anti-glare
	Display Colors	16.7M
	Color bit	8 bits (6 bits + FRC)
I/O Ports	D-Sub	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	Speaker	2
	HDMI	1
	HDMI version	1.4b
	HDMI HDCP version	1.4
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	1.3
Warranty	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	18 (SDR) 22 (HDR)
	Annual Energy Consumption (KWh)	60
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	E (SDR) F (HDR)
	Power Cord Type	C13



BUSINESS PRODUCTIVITY MONITOR

PRO MP242PMG

PRO MP242PMG

In The Box	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	540 x 227 x 412
	Product Dimension without Stand (WxDxH) (mm)	540 x 46 x 335
	Stand Dimension (WxDxH) (mm)	260 x 227 x 412
	Weight (Net kg)	5.5
	Weight Without Stand (kg)	2.9
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	60 x 19.6 x 41
	Outer Carton Dimension (WxDxH) (cm)	61.5 x 21.1 x 43.3
	Weight (Gross kg)	7.7
Barcode Info	EAN	4711377260404