

The New Esports Meta

MSI Oculux NXG253R is especially designed for esports gaming. With Nvidia G-SYNC technology built in, gamers can enjoy the wonderful tearing-free gaming experience. The ultra-high 360hz refresh rate and 1ms response time Rapid IPS panel will provide pro-gamers both smooth and clear in-game images. The 24.5 inch, thin bezel design is also convenient for multi-screen setups. Light bars on the back of the monitor also support MSI Mystic Light, allowing gamers to create their own gaming style with their favorite colors. The unique adjustable stand design allows gamers to position their monitors based on their preferences. With all the gaming elements it has, MSI Oculux NXG253R is ready to bring gamers into endless victories.




Selling Points

- NVIDIA G-SYNC – Prevent screen tearing or stuttering, producing ultra-smooth lag-free gameplay.
- Rapid IPS – Provides 1ms GTG fast response time, optimizes screen colors and brightness.
- 360Hz Extremely High Refresh Rate – Respond faster with smoother frames.
- 1ms GTG Response Time – Eliminate screen tearing and choppy frame rates.
- NVIDIA Reflex Latency Analyzer – Give an accurate measurement of system latency.
- ULMB (Ultra Low Motion Blur) – Silky-smooth and crystal-clear moving objects.
- Adjustable Stand – Easily change the position of the monitor for maximum ergonomics.
- Wide Color Gamut – Game colors and details will look more realistic and refined.
- Frameless Design – Enjoy the ultimate gaming experience with super narrow bezels.
- Anti-Flicker and Less Blue Light – Game even longer and prevent eye strai ...



Picture and logos: Pictures 모니터

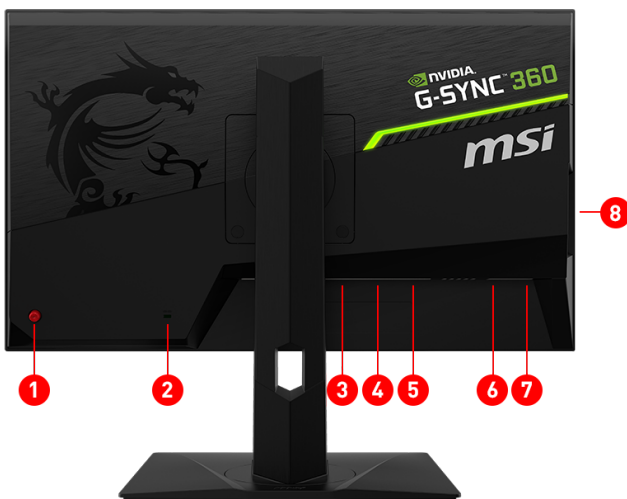

1. 5-way joystick navigator
2. Kensington Lock
3. 2x HDMI (2.0b)
4. 1x Display Port (1.4)
5. 1x Earphone out
6. DC Jack
7. 1x USB 3.2 Gen 1 Type B
8. 3x USB 3.2 Gen 1 Type A



모 니 터

Oculux NXG253R

OCULUX NXG253R

Specification

Color	ID1/Black-Black
Screen Size	24.5" (62.2cm)
Active Display Area (mm)	543.168(H) x 302.616(V)
Curvature	Flat
Panel Type	Rapid IPS
Resolution	1920x1080 (FHD)
Pixel pitch	0.2829(H)x0.2802(V)
Aspect Ratio	16:9
Dynamic Refresh Rate technology	G-SYNC
Activated Range	0-360Hz
HDR (High dynamic range)	HDR Ready
SDR Brightness (nits)	400
Contrast Ratio	1000:1
DCR (Dynamic Contrast Ratio)	NA
Signal Frequency	150.9~417.6 KHz(H) / 48~360 Hz(V)
Refresh Rate	360Hz
Response Time (MPRT)	1ms (ULMB)
Response Time (GTG)	1ms
Response Time (Tr + Tf)	NA
View Angles	178°(H)/178°(V)
NTSC (CIE1976 area percentageoverlap)	95.85%/80.24%
NTSC (CIE1931 area percentageoverlap)	78.7%/74.04%
sRGB (CIE1976 area percentageoverlap)	109.63%/98.04%
sRGB (CIE1931 area percentageoverlap)	111.12%/98.94%
Adobe RGB (CIE1976 area percentageoverlap)	93.97%/85.47%
Adobe RGB (CIE1931 area percentageoverlap)	82.37%/77.02%
DCI-P3 (CIE1976 area percentageoverlap)	87.31%/84.09%
DCI-P3 (CIE1931 area percentageoverlap)	81.91%/81.2%
Rec.709 (CIE1976 area percentageoverlap)	95.85%/80.24%
Rec.709 (CIE1931 area percentageoverlap)	78.7%/74.04%
Surface Treatment	Anti-glare
Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)
Note_DP	1920 x 1080 (Up to 360Hz)
Note_HDMI	1920 x 1080(Up to 240Hz)
Note_DVI	N/A
HDR Brightness (Peak nits)	400
Rec.2020 (CIE1976 area percentageoverlap)	N/A
Rec.2020 (CIE1931 area percentageoverlap)	N/A
HDMI	2
HDMI version	2.0b
HDMI HDCP version	NA
DisplayPort	1
DisplayPort version	1.4
DisplayPort HDCP version	NA
Thunderbolt version	NA
Thunderbolt HDCP version	NA
USB Type C (DisplayPort Alternate)	NA
DVI	NA
D-Sub	NA
Mic-in	NA
Mic-in upstream	NA
Headphone-out	1
Audio Combo	NA
USB 2.0 Type B	NA
USB 3.2 Gen 1 Type B	1
Lock type	Kensington Lock
Speaker	N/A
Power Type	External Adaptor 20V 4.5A
Power Input	100~240V, 50/60Hz
Adapter's KC safety Number	SU10469-16001
Power Cord Type	C5
QC Output	NA



모 니 터

Oculux NXG253R

OCULUX NXG253R

QC Output Power	NA
PD Output	NA
PD Output Power	NA
Adjustment (Tilt)	-5° ~ 20°
Adjustment (Swivel)	-45° ~ 45°
Adjustment (Height)	0 ~ 130 mm
Adjustment (Pivot)	-90° ~ 90°
VESA Mounting	100x100mm
Frameless Design	Yes
Outer Carton Dimension (WxDxH) (mm)	776 x 222 x 435
Outer Carton Dimension (WxDxH) (inch)	30.55 x 8.74 x 17.13
Product Dimension with Stand (WxDxH) (mm)	560.1 x 233.7 x 399.3
Product Dimension with Stand (WxDxH) (inch)	22.05 x 9.2 x 15.72
Product Dimension without Stand (WxDxH) (mm)	560.1 x 64.3 x 335.5
Product Dimension without Stand (WxDxH) (inch)	22.05 x 2.53 x 13.21
Thunderbolt	NA
USB 2.0 Type A	NA
USB 2.0 Type C	NA
USB 3.2 Gen 1 Type A	3
USB 3.2 Gen 1 Type C	NA
USB 3.2 Gen 2x2 Type C	NA
USB 3.2 Gen 2x2 Type A	NA
Card Reader	NA
Stand Dimension (WxDxH) (mm)	303.3 x 233.7 x 416.7
Stand Dimension (WxDxH) (inch)	11.94 x 9.2 x 16.41
WebCam	N/A
Weight Without Stand (kg)	N/A
Feature	Gaming Mode 5 Ways Joystick Navigator Control Frameless design HDR Ready G-Sync
Certification	全球(WW)/CB
Inside Carton Dimension (WxDxH) (mm)	761 x 207 x 410
Inside Carton Dimension (WxDxH) (inch)	29.96 x 8.15 x 16.14
Weight (Net kg)	6.47
Weight (Gross kg)	9.02
DisplayPort Cable	1
HDMI Cable	1
DVI Cable	0
USB Type A to Type B Cable	1
USB Type C to Type A Cable	0
USB Type C to Type C Cable	0
Thunderbolt Cable	0
VGA Cable	0
3.5mm audio Cable	0
3.5mm combo audio Cable	0
Mouse Bungee Unit	N/A
VESA Screw	N/A
Warranty	12M
Power Cord	1
AC Adaptor	1
Quick Guide	1
Warranty Card	1
EAN	4719072798130