

## PATH TO THE FUTURE


More than Professional, Forged with Style Delivering an incredible experience while supporting efficiency and productivity. This ultra-stylish & frameless MSI All-in-One PC PRO 22X will transform the entire aesthetics of the workspace in an office or at home.



Picture and logos

## SELLING POINTS

- Windows 10 Home - MSI recommends Windows 10 Pro
- 21.5" IPS Grade Panel LED Backlight (1920\*1080 FHD)
- The 9th Generation Intel® Desktop Processors
- Optional 10-Point Touch Panel (PRO 22XT)
- Anti-Flicker & Less Blue Light technology protect users' eyes.
- 5-Way Navigator for an easy OSD Control
- Silent PRO Cooling System: Server Grade Thermal Module ensures a silent and stable operation with a longer life cycle.
- MSI HDD Rapid Upgrade Design helps you to upgrade or maintain your 2.5" storage
- Reversible USB 3.1 Gen 1 Type C allows for the effortless connecting of USB devices.
- With a complete array of I/O ports, it can connect all the devices that you need.
- COM port for barcode scanner, credit card reader, printer or cash machine, etc.
- 178° wide viewing angle screen
- Features MSI Super Charger technology that supports fast USB Sleep-and-Charge with auto-detection

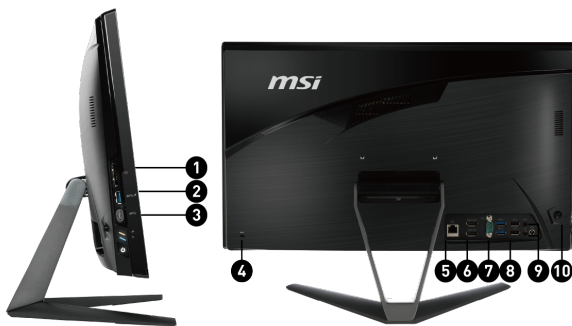

1. 1x Card Reader
2. 1x USB 3.1 Gen 1 Type A
3. 1x USB 3.1 Gen 1 Type C
4. 1x Kensington Lock
5. 1x RJ45 LAN
6. 1x HDMI™-in / 1x HDMI™-out
7. 1x COM port
8. 2x USB 3.1 Gen 1 Type A / 2x USB 2.0 Type A
9. 1x MIC-in / 1x Headphone-out
10. 1x 5-Way Navigator OSD Control Button



ALL-IN-ONE PCS

PRO 22XT 9M

PRO 22XT 9M-029XEU

SPECIFICATION

Operating Systems	Operating Systems	N/A
Model	Part No	9S6-ACD112-226
	MKT Name	PRO 22XT 9M
	MKT Spec	PRO 22XT 9M-029XEU
	SKU Number	0
	Color	ID1/White-White-White
Display	Screen Size	21.5" (55 cm)
	Active Display Area (mm)	476.064(H) x267.786(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	1920x1080 (FHD)
	Pixel pitch	0.24795(H)X0.24795 (V)
	Brightness (nits)	250
	Contrast Ratio	1000:1
	Signal Frequency	64~83 KHz(H) / 50~75 Hz(V)
	Response Time (GTG)	14ms
	View Angles	178°(H)/178°(V)
	Surface Treatment	Non-glare
	Touch Screen	10 Points Projected Capacitive Touch Screen
I/O Ports	Display Colors	16.7M
	Lock type	Kensington
Processor	CPU Number	Intel Celeron G4930
	CPU Clock	3.2GHz
	CPU Cores	2
	TDP	54W
	Cache	2 MB SmartCache
	Threads	2
Chipset	Chipsets	H310C
Memory	Memory Size	8GB(8GB*1)
	Memory Type	DDR4 SDRAM
	Memory Speed	1333(2666)MHz
	Module Type	SO-DIMM
	Memory Slot (Total/Free)	2/1
	Max Capacity	Max 16GB
Storage	SSD Size	256GB
	HDD1 Size	N/A
	SSD Config	256GB*1
	SSD Interface	PCIe GEN3x2 NVMe
	SSD Form Factor	M.2-2280 B+M KEY
	M.2 slots (Total/Free)	1/0
	HDD1 RPM	N/A
	HDD1 Form Factor	N/A
	HDD1 Interface	N/A
	3.5" Drive Bays (Total/Free)	0/
	2.5" Drive Bays (Total/Free)	1/1
	ODD(Type)	N/A
	ODD Height	N/A
	ODD Type	N/A
Communications	LAN	Realtek RTL8111H
	WLAN	INTEL/3168.NGWG
	WLAN Version	802.11ac 1x1+BT
	BT Version	4.2
Audio	Audio Chipset	Realtek ALC887
	Audio Type	7.1 Channel HD Audio
I/O Ports (Front)	USB 3.2 Gen 1 Type A	1
	USB 3.2 Gen 1 Type C	1



ALL-IN-ONE PCS

PRO 22XT 9M

PRO 22XT 9M-029XEU

I/O Ports (Rear)	USB 3.2 Gen 1 Type A (R)	2
	USB 2.0 Type A (R)	2
	RJ45	1
	Card Reader	1
	HDMI™ out	1x (v1.4)
	COM Port	1
	HDMI™ in	1
Power	AC Adapter Output	120W
	Battery	N/A
	Battery Whrs	N/A
In The Box	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	2
	User Manual	N/A
	VESA Mount kit	N/A
	Keyboard	N/A
Design	Mouse	N/A
	Adjustment (Tilt)	Front 5°/Rear 15°
Dimension & Weight	Weight (Net kg)	5.8
	Weight (Gross kg)	8.45
	Product Dimension with Holder (WxDxH) (mm)	N/A
	Product Dimension with Holder (WxDxH) (inch)	N/A
	Inside Carton Dimension with Holder (WxDxH) (mm)	N/A
	Inside Carton Dimension with Holder (WxDxH) (inch)	N/A
	Inside Carton Dimension with Stand (WxDxH) (mm)	N/A
	Inside Carton Dimension with Stand (WxDxH) (inch)	N/A
	Outer Carton Dimension with Holder (WxDxH) (mm)	N/A
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	500 x 210 x 370
	Product Dimension with Stand (WxDxH) (inch)	19.69 x 8.27 x 14.57
Warranty	Warranty	24M
Regulatory Compliance	Operating, Storage Temperature	0° C ~ 35° C ; -20° C ~ 60° C
	Operating, Storage Humidity	0% ~ 85%;0% ~ 90%
	Regulatory Compliance	FCC(Class B)
		CB/CE UL(CUL) BSMI VCCI RCM(C-Tick)
Barcode Info	EAN	4719072643447