


All About Gaming



Picture and logos

SELLING POINTS

- Panel Rapid IPS - oferuje szybki 1-milisekundowy czas reakcji matrycy GTG, optymalizuje kolory i jasność ekranu.
- Wysoka rozdzielczość WQHD - gry będą wyglądać jeszcze lepiej, dzięki możliwości wyświetlenia znacznie większej ilości szczegółów.
- Częstotliwość odświeżania 170 Hz - Reaguj szybciej dzięki płynnemu wyświetlaniu klatek na ekranie monitora.
- 1-milisekundowy czas reakcji matrycy GTG - ciesz się płynnym generowaniem klatek obrazu i brakiem efektu rozmycia nawet podczas wyświetlania dynamicznych, kontrastowych scen.
- HDR 400 - monitor pozwala uzyskać przyciągające wzrok szczegóły, dzięki możliwości regulacji kontrastu i cieni.
- Złącze USB Type-C z funkcją ładowania - pozwala nie tylko na podłączenie dowolnego urządzenia, ale również na ich bezproblemowe zasilanie (do 15W).
- Funkcja Night Vision - inteligentny tuner zamieniający noc w dzień, funkcja ta wydobywa drobne szczegóły w ciemnych obszarach ekranu.
- Szeroka gama kolorów - kolory i szczegóły w grze będą wyglądać jeszcze bardziej realistycznie i wyrafinowanie.
- Pozbawiona ramki konstrukcja ekranu - Doskonałe wrażenia z rozgrywki, dzięki super-wąskiej ramce wokół ekranu.
- Szeroki, 178-stopniowy kąt widzenia ekranu - Widoczne na wyświetlaczu kolory i detale pozostają zawsze ostre, pod znacznie większym, bo aż 178° kątem widzenia.
- ...

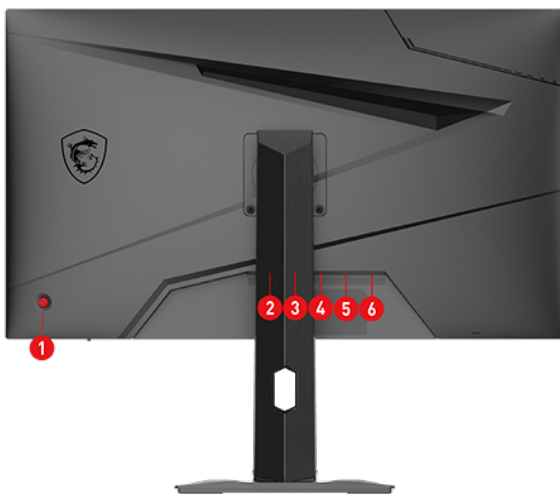

1. 5-way joystick navigator
2. DC jack
3. Earphone out
4. 2x HDMI™ (2.0b)
5. 1x Display Port (1.4a)
6. Type-C (15W PD Charging)

SPECIFICATION

Model	SKU Number	0
	Part No	9S6-3CC29H-068
	Color	ID1/Black-Black
	MKT Name	G274QPF
	MKT Spec	G274QPF
	Model	3CC2
Display	Screen Size	27" (69 cm)
	Active Display Area (mm)	597.6(H)x336.15(V)
	Curvature	Flat
	Panel Type	Rapid IPS
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~170Hz
	HDR (High dynamic range)	DisplayHDR 400
	SDR Brightness (nits)	400
	HDR Brightness (Peak nits)	400
	Contrast Ratio	1000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	90.9~242.4 KHz(H) / 48~170 Hz(V)
	Refresh Rate	170Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	1ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	105%/92%
	NTSC (CIE1931 area percentage/overlap)	92%/88%
	sRGB (CIE1976 area percentage/overlap)	121%/99%
	sRGB (CIE1931 area percentage/overlap)	130%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	104%/96%
	Adobe RGB (CIE1931 area percentage/overlap)	96%/90%
	DCI-P3 (CIE1976 area percentage/overlap)	96%/93%
	DCI-P3 (CIE1931 area percentage/overlap)	96%/93%
	Rec.709 (CIE1976 area percentage/overlap)	121%/99%
	Rec.709 (CIE1931 area percentage/overlap)	130%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	70%/70%
Rec.2020 (CIE1931 area percentage/overlap)	69%/69%	
Surface Treatment	Anti-glare	
Display Colors	1.07B	
Color bit	10 bits (8 bits + FRC)	
I/O Ports	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.2
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.2
Warranty	Warranty	36M
Power	Power Type	External Adaptor 19V 3.42A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	26W
	Annual Energy Consumption (KWh)	26W
	Standby-mode Power Consumption (W)	0.5W
	Off-mode Power Consumption (W)	0.3W
	Energy Efficiency Rating	F
Power Cord Type	C13	

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
	Switch Case	0
	Portable Screen Protection Case	0
	Monitor Hood	0
	Speaker (Accessories)	0
VESA Screw	4	
I/O Ports (Front)	Card Reader	N/A
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	75x75mm
	Frameless Design	Yes
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	613.49 x 196.48 x 402.08
	Product Dimension without Stand (WxDxH) (mm)	613.49 x 69.74 x 362.46
	Stand Dimension (WxDxH) (mm)	242.2 x 196.48 x 399.19
	Weight (Net kg)	6.05
	Weight Without Stand (kg)	4.05
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	8.
Barcode Info	EAN	4711377100007
Dimension&Weight	Inside Carton Dimension (WxDxH) (inch)	N/A
	Weight (Net kg)	6.05
	Weight (Gross kg)	8.
Product Dimension with Stand (WxDxH)	Product Dimension with Stand (WxDxH) (mm)	613.49 x 196.48 x 402.08
	Product Dimension with Stand (WxDxH) (inch)	24.15 x 7.74 x 15.83
Weight	Weight Without Stand (kg)	4.05
Outer Carton Dimension (WxDxH)	Outer Carton Dimension (WxDxH) (inch)	N/A