

## See beyond the Game. Visualize your victory.


Inspired by the rigorous quality testing in the production of MSI MAG series, MSI MAG series' design is full of symbols of sturdiness and durability. Additionally, to provide quality user experience, MAG series has really simple installation process and a friendly user interface, and will be the best choice for entry level gamers to step into the game world.



Picture and logos

### SELLING POINTS

- Zakrzywiony, gamingowy wyświetlacz (1500R) – najlepsze wrażenia i zanurzenie w wirtualnym świecie gier.
- Częstotliwość odświeżania 170 Hz – prawdziwie płynna gra.
- 1-milisekundowy czas reakcji matrycy – eliminacja efektu rozdierania ekranu i nierównej szybkości generowania klatek obrazu.
- System Night Vision – Zobacz w ciemności wyraźnie każdy szczegół obrazu. Technologia ta, pomoże Ci znaleźć i zaatakować wrogów, zanim oni zauważą Ciebie.
- Technologia Adaptive-sync – Płynna rozgrywka, pozbawiona zacięć i efektu rozrywania ekranu.
- Technologie Anti-Flicker i Less Blue Light – możesz jeszcze dłużej grać bez zmęczenia i znużenia oczu.
- Pozbawiona ramki konstrukcja ekranu – doskonałe wrażenia z rozgrywki.
- Szeroki, 178-stopniowy kąt widzenia ekranu.

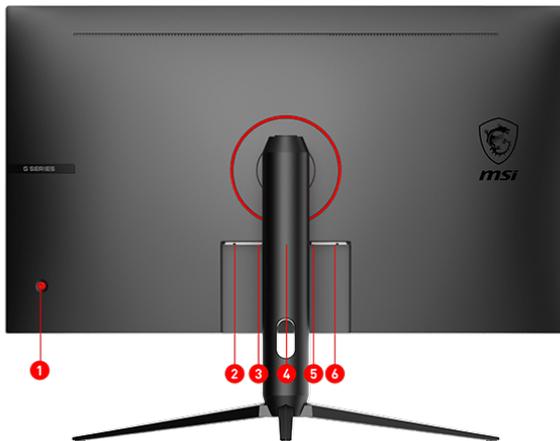

1. 5-way joystick navigator
2. 2x HDMI 2.0b
3. 1x DisplayPort 1.2a
4. 1x Earphoneout
5. 1x DC Jack 1x Kensington lock

## SPECIFICATION

Model	Part No	9S6-3DB44H-051
	Color	ID1/Black-Black
Display	Screen Size	31.5" (80 cm)
	Active Display Area (mm)	697.344(H)x392.256(V)
	Curvature	Curve 1500R
	Panel Type	VA
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2724(H)x0.2724(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~170Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	250
	Contrast Ratio	3000:1
	DCR (Dynamic Contrast Ratio)	10000000:1
	Signal Frequency	90.9~251.1 KHz(H) / 48~170 Hz(V)
	Refresh Rate	170Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	101%/85%
	NTSC (CIE1931 area percentage/overlap)	86%/80%
	sRGB (CIE1976 area percentage/overlap)	115%/98%
	sRGB (CIE1931 area percentage/overlap)	121%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	99%/88%
	Adobe RGB (CIE1931 area percentage/overlap)	90%/82%
	DCI-P3 (CIE1976 area percentage/overlap)	92%/91%
	DCI-P3 (CIE1931 area percentage/overlap)	89%/89%
	Rec.709 (CIE1976 area percentage/overlap)	115%/98%
	Rec.709 (CIE1931 area percentage/overlap)	121%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	66%/66%
	Rec.2020 (CIE1931 area percentage/overlap)	64%/64%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
Color bit	10 bits (8 bits + FRC)	
I/O Ports	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	2.3
Warranty	Warranty	36M
Power	Power Type	External Adaptor 19V 3.42A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	32
	Annual Energy Consumption (KWh)	32
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
Power Cord Type	C13	

Accessories	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	1
	Quick Guide	1
	Warranty Card	0
Mouse Bungee Unit	0	
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 90 mm
	VESA Mounting	75x75mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	709.97 x 286.97 x 555.61
	Product Dimension without Stand (WxDxH) (mm)	709.97 x 103.33 x 418.66
	Stand Dimension (WxDxH) (mm)	541.38 x 286.42 x 403.76
	Weight (Net kg)	6.7
	Weight Without Stand (kg)	5.2
Dimension & Weight (box)	Inside Carton Dimension (WxDxH) (cm)	94.5 x 17.3 x 54.5
	Outer Carton Dimension (WxDxH) (cm)	96.1 x 18.9 x 56.5
	Weight (Gross kg)	9.2
Barcode Info	EAN	4711377117487